



Factory Add: No.255 Yindong South Rd., Yinzhou Economic Development Zone,
Zhanqi Town, Ningbo City, Zhejiang, China.

Email: sales@silanglighting.com

Website: www.silanglighting.com

Tel: (+86)-574-55003160

SILANG LIGHTING



CATALOGUE 2023

NINGBO · CHINA

COMPANY PROFILE



20000^{m²}

Plant area

300

Technical staff

30+

Export country

\$30^{million}

Annual output



As a rising star of LED lighting industry, Ningbo SILANG Lighting is specialized in designing, manufacturing and developing LED lights. With years of lighting experience, we are dedicated to helping with the upgrading of indoor/ outdoor lighting environment through our high-quality led downlights, security floodlights, smart lights and solar lights.

The company is located in Ningbo city, which is only a 30-minute drive from Ningbo Port. SILANG possesses strong advantages of both fast delivery and strong supply chain system.

SILANG's easy-to-use, innovative and reliable products are highly preferred by our loyal clients in Europe, Australia, New Zealand and now US markets. We offer a wide range of products and services, as well as multiple solutions to support the market growth you want.

SILANG embraces technical innovation and revolution. We believes that research and development investment is the key to brings new and innovative products to market with customer involvement.

Whatever your professional lighting needs, we'd love to help you with your current/next project.





FACILITY

CERTIFICATION



OUR STRENGTH



Professional Lights with Competitive Price: Well-designed products are developed and manufactured by our own lab and factory, together with our optimal self-made drivers. Our state-of-the-art equipment allows us to always provide quality LED lighting solutions with a reasonable price and flexible ordering quantities.



Rigorous Quality Control: Focus on LED lighting for 10 years, the whole manufacturing process strictly follows the ISO9001 Quality Management System, meeting RCM, CE and ETL criteria. The QC department conducts IQC, inspection during the assembling, random inspection and even full inspection on request before shipping.



Stable Delivery Time: Having 300+ skilled workers and 22 assembly lines, we've reached a product capacity of 600,000pcs per month, ensuring a fast delivery time. Meanwhile, locating in the port city, Ningbo, also means a great convenience for exportation.



Strong R&D Capability: SILANG embraces technical innovation and revolution. Thanks to our experienced and talented team members, SILANG's independent R&D department maintains a consistent pace of releasing 6+ new products each year. Besides, we offer deep customization service by requests from Australian, European and American markets.

US Standard

ISmart Pro



SG II series



SG III series



YDR series



YDS series



YER series



YES series

I Downlight



SG II series



SG III series



SU Module

I Security Light



YDR series



YDS series



YER series



YES series




US Large Size Smart LED Downlight

FINISH COLOUR




COLOUR TEMPERATURE



SPECIFICATIONS

Code	DL-SG260-213D5
Wattage	13W
CCT(K)	3000K-6500K&RGB
Lumens	1050lm
Efficiency	80lm/W
CRI	> 80
Beam Angle	100°
Input	110-130V-60Hz
Dimmable	Yes
Operating Temp.	-20°C -+45°C
Dimension(DxH)	170x30mm
Material	Nylon + Aluminum+PC

DIMENSIONS

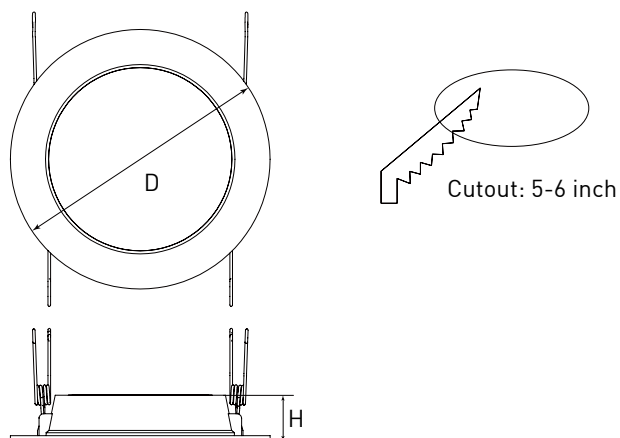

US Large Size Smart LED Downlight

FINISH COLOUR





COLOUR TEMPERATURE



SPECIFICATIONS

Code	DL-SG360-213D5
Wattage	12W
CCT(K)	3000K-6500K&RGB
Lumens	960lm
Efficiency	80lm/W
CRI	> 80
Beam Angle	100°
Input	110-130V~60Hz
Dimmable	Yes
Operating Temp.	-20°C ~+45°C
Dimension(DxH)	185x25mm
Material	Nylon + Aluminum+PC

DIMENSIONS

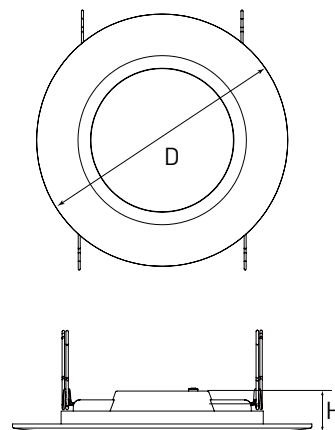

US High Lumen Output Outdoor Smart Security Light

FINISH COLOUR




COLOUR TEMPERATURE



SPECIFICATIONS

Code	WL-YDR-224P-D5(BK)	WL-YDR-224P-D5(WH)
Wattage	24W	
CCT(K)	3000K-6500K	
Lumens	1900lm	2500lm
Efficiency	80lm/W	105lm/W
CRI	> 80	
Beam Angle	90°/head	
Input	110-130V~60Hz	
Operating Temp.	-20°C ~+45°C	
Detection Range	120°	
Detection Brightness	5-2000Lux	
Detection Distance	10m max	
Detection Duration	3secs-8mins	
Material	PC	

DIMENSIONS

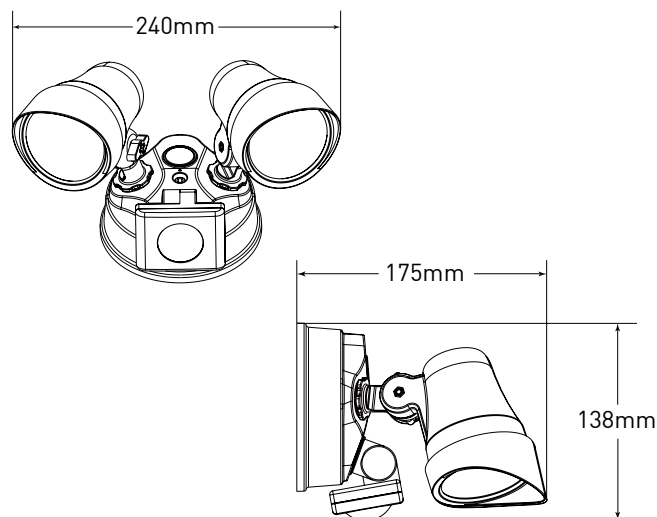


US High Lumen Output Outdoor Smart Security Light

FINISH COLOUR




COLOUR TEMPERATURE



SPECIFICATIONS

Code	WL-YDS-240P-D5(BK)	WL-YDS-240P-D5(WH)
Wattage	40W	
CCT(K)	3000K-6500K	
Lumens	3800lm	4400lm
Efficiency	95lm/W	110m/W
CRI	> 80	
Beam Angle	90°/head	
Input	110-130V~60Hz	
Dimmable	Yes	
Operating Temp.	-20°C ~+45°C	
Detection Range	120°	
Detection Brightness	5-2000Lux	
Detection Distance	10m max	
Detection Duration	3secs-8mins	
Material	PC+Glass	

DIMENSIONS

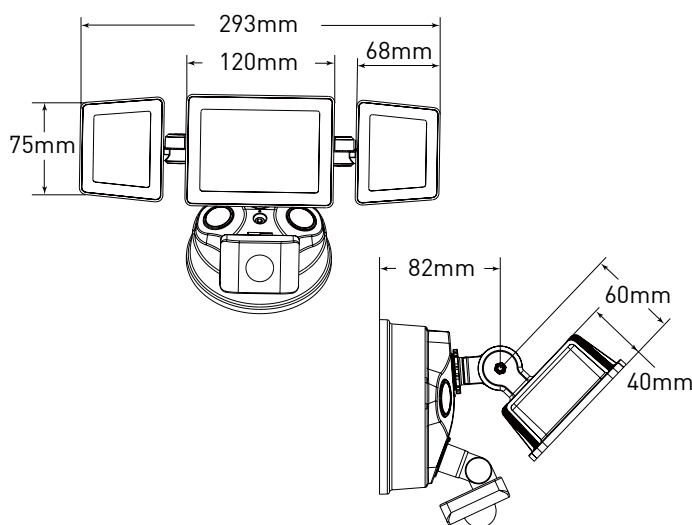

US High Lumen Output Outdoor Smart Security Light

FINISH COLOUR





COLOUR TEMPERATURE



SPECIFICATIONS

Code	WL-YER-230P-D5
Wattage	30W
CCT(K)	3000K-6500K
Lumens	2400lm
Efficiency	80lm/W
CRI	> 80
Beam Angle	90°/head
Input	110-130V~60Hz
Dimmable	Yes
Operating Temp.	-20℃ ~+45℃
Working Mode	Auto/On time
Detection Range	120°
Detection Brightness	5-2000Lux
Detection Distance	10m max
Detection Duration	3secs-8mins
Material	Aluminum+PC

DIMENSIONS

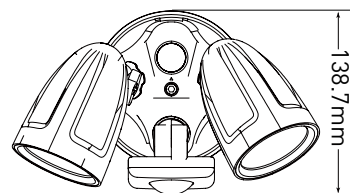



US High Lumen Output Outdoor Smart Security Light

FINISH COLOUR





COLOUR TEMPERATURE



SPECIFICATIONS

Code	WL-YES-260P-D5
Wattage	60W
CCT(K)	3000K-6500K
Lumens	4800lm
Efficiency	80lm/W
CRI	> 80
Beam Angle	90°/head
Input	110-130V~60Hz
Dimmable	Yes
Operating Temp.	-20°C ~+45°C
Detection Range	120°
Detection Brightness	5-2000Lux
Detection Distance	10m max
Detection Duration	3secs-8mins
Material	Aluminum+PC

DIMENSIONS

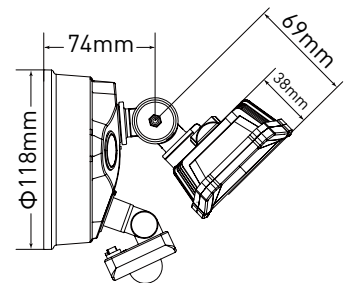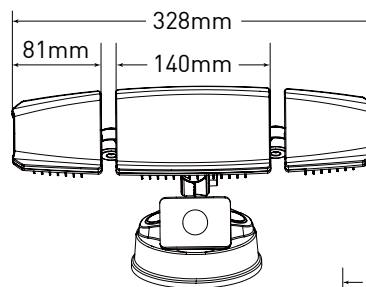

US Large Size Colour Adjustable LED Downlight

FINISH COLOUR




COLOUR TEMPERATURE



SPECIFICATIONS

Code	DL-SG260-213D3
Wattage	13W
CCT(K)	2700K/3000K/4000K/5000K/6500K
Lumens	1050lm
Efficiency	80lm/W
CRI	> 80
Beam Angle	100°
Input	110-130V~60Hz
Dimmable	Yes
Operating Temp.	-20°C ~+45°C
Dimension(DxH)	170x30mm
Material	Nylon+Aluminum+PC

DIMENSIONS

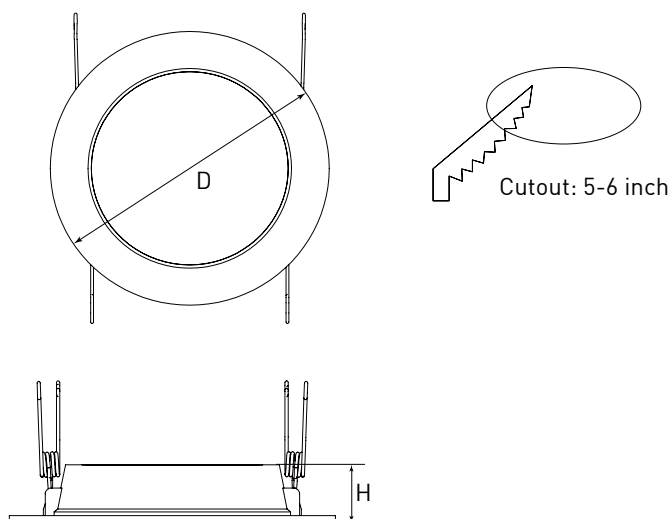

US Large Size Color Adjustable LED Downlight

FINISH COLOUR




COLOUR TEMPERATURE



SPECIFICATIONS

Code	DL-SG360-213D3
Wattage	12W
CCT(K)	2700K/3000K/4000K/5000K/6500K
Lumens	960lm
Efficiency	80lm/W
CRI	> 80
Beam Angle	100°
Input	110-130V~60Hz
Dimmable	Yes(Triac)
Operating Temp.	-20°C ~+45°C
Dimension(DxH)	185x25mm
Material	Nylon+Aluminum+PC

DIMENSIONS

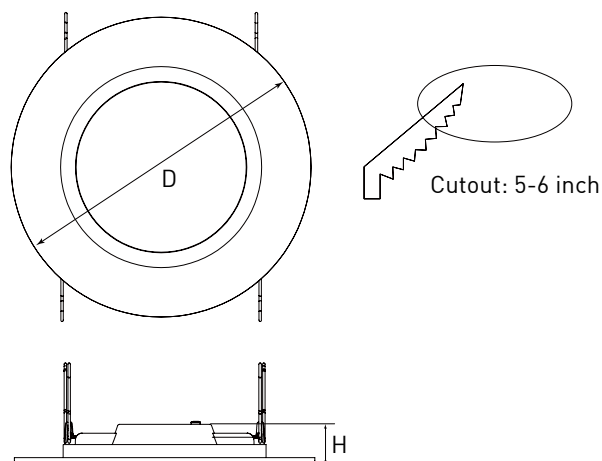

US Large Size Color Adjustable LED Module

FINISH COLOUR




COLOUR TEMPERATURE



SPECIFICATIONS

Code	M-SU60-213D3
Wattage	12W
CCT(K)	2700K/3000K/4000K/5000K/6500K
Lumens	1020lm
Efficiency	85lm/W
CRI	> 80
Beam Angle	100°
Input	110-130V~60Hz
Dimmable	Yes
Operating Temp.	-20°C ~+45°C
Dimension(DxH)	170x30mm
Material	Nylon+Aluminum+PC

DIMENSIONS

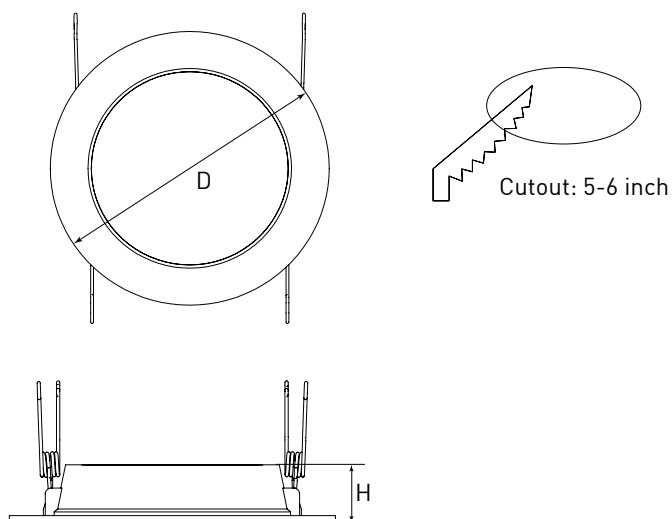

US 3CCT Outdoor Round Photosensitive LED Security Light

FINISH COLOUR




COLOUR TEMPERATURE



SPECIFICATIONS

Code	WL-YDR03-224D8
Wattage	24W
CCT(K)	3000K/4000K/6500K
Lumens	1900lm
Efficiency	80lm/W
CRI	> 80
Beam Angle	90°/head
Input	110-130V~60Hz
Dimmable	No
Operating Temp.	-20°C ~+45°C
Working Mode	D2D/On time
Detection Brightness	<10Lux or >50Lux
Material	PC

DIMENSIONS

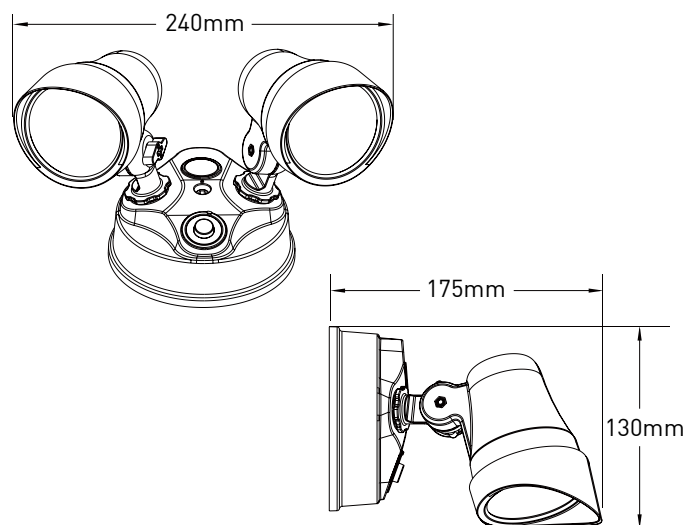

US Remote Control High Lumen Output Security Light

FINISH COLOUR




COLOUR TEMPERATURE



SPECIFICATIONS

Code	WL-YDR-224P-D4(BK)	WL-YDR-224P-D4(WH)
Wattage	24W	
CCT(K)	3000K-6500K	
Lumens	1900lm	2500lm
Efficiency	80lm/W	105lm/W
CRI	> 80	
Beam Angle	90°/head	
Input	110-130V~60Hz	
Dimmable	Yes	
Operating Temp.	-20°C ~+45°C	
Working Mode	Auto/D2D/On Time	
Detection Range	120°	
Detection Brightness	5-2000Lux	
Duration Time	15s/30s/1m/2m	
Detection Duration	10m max	
Material	PC	

DIMENSIONS

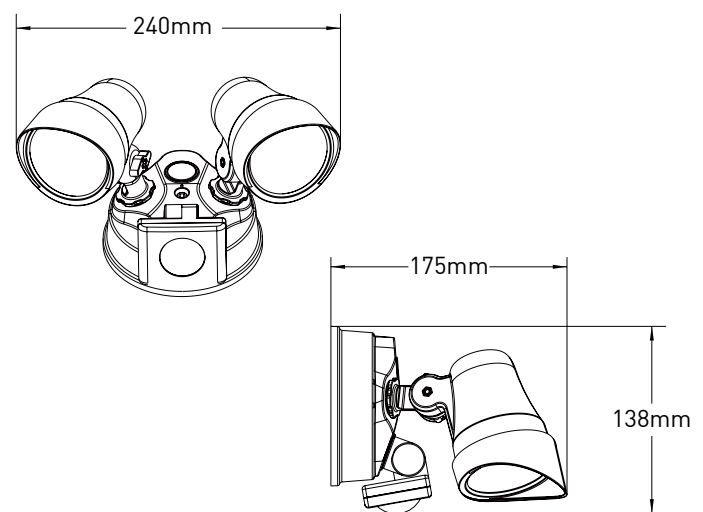

US Colour Adjustable LED Security Light

FINISH COLOUR





COLOUR TEMPERATURE



SPECIFICATIONS

Code	WL-YDR-224P(BK)	WL-YDR-224P(WH)
Wattage	24W	
CCT(K)	3000K/4000K/6500K	
Lumens	1900lm	2500lm
Efficiency	80lm/W	105lm/W
CRI	> 80	
Beam Angle	90°/head	
Input	110-130V-60Hz	
Dimmable	No	
Operating Temp.	-20°C ~+45°C	
Detection Angle	120°	
Detection Brightness	5-2000Lux	
Duration Time	3secs-8mins	
Detection Distance	10m max	
Manual Override	Yes	
Material	PC	

DIMENSIONS

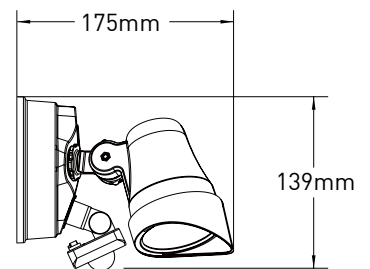

US 3CCT Outdoor Square Photosensitive LED Security Light

FINISH COLOUR




COLOUR TEMPEI



SPECIFICATIONS


Code	WL-YDS03-240D8
Wattage	40W
CCT(K)	3000K/4000K/6500K
Lumens	3800lm
Efficiency	95lm/W
CRI	> 80
Beam Angle	90°/head
Input	110-130V~60Hz
Dimmable	No
Operating Temp.	-20°C ~+45°C
Working Mode	D2D/On Time
Detection Brightness	<10Lux or >50Lux
Material	PC

DIMENSIONS

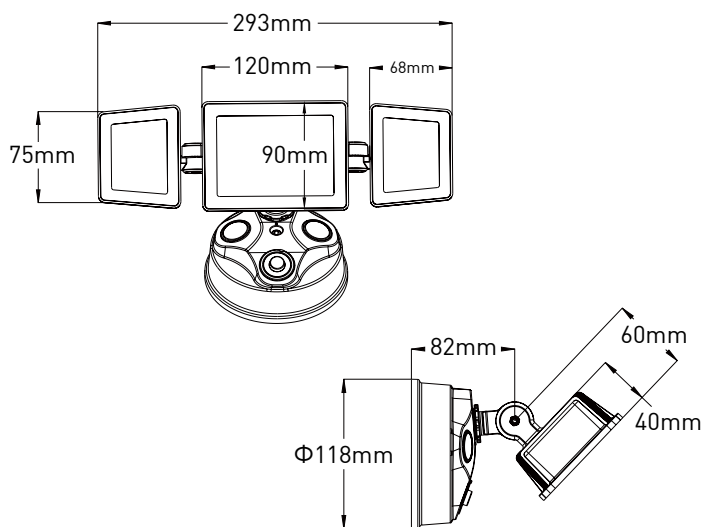

US Remote Control High Lumen Output Security Light

FINISH COLOUR




COLOUR TEMPERATURE



SPECIFICATIONS

Code	WL-YDS-240P-D4(BK)	WL-YDS-240P-D4(WH)
Wattage	40W	
CCT(K)	3000K-6500K	
Lumens	3800lm	4400lm
Efficiency	95lm/W	110lm/W
CRI	> 80	
Beam Angle	90°/head	
Input	110-130V~60Hz	
Dimmable	Yes	
Operating Temp.	-20°C ~+45°C	
Working Mode	Auto/D2D/On Time	
Detection Brightness	5-2000Lux	
Detection Angle	120°	
Duration Time	3secs-8mins	
Detection Distance	10m max	
Material	PC	

DIMENSIONS

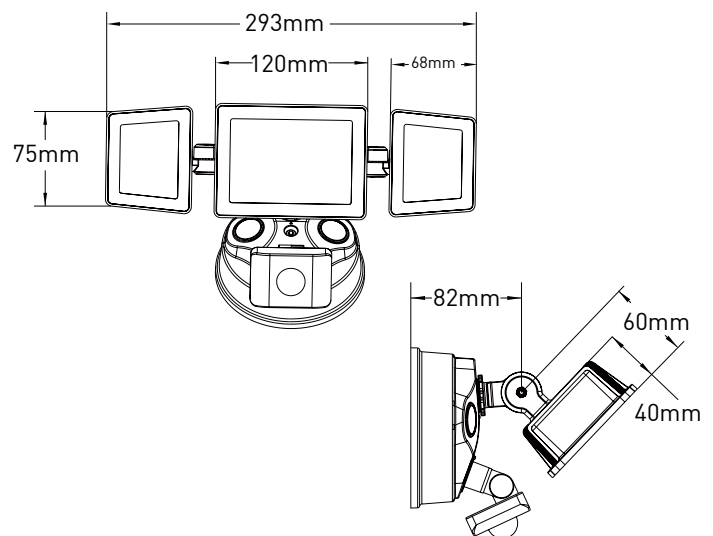

US Colour Switchable LED Security Light

FINISH COLOUR




COLOUR TEMPERATURE



SPECIFICATIONS

Code	WL-YDS-240P(BK)	WL-YDS-240P(WH)
Wattage	40W	
CCT(K)	3000K/4000K/6500K	
Lumens	3800lm	4400lm
Efficiency	95lm/W	110lm/W
CRI	> 80	
Beam Angle	90°/head	
Input	110-130V~60Hz	
Dimmable	No	
Operating Temp.	-20°C ~+45°C	
Detection Angle	120°	
Detection Brightness	5-2000Lux	
Duration Time	3secs-8mins	
Detection Distance	10m max	
Manual Override	Yes	
Material	PC+Glass	

DIMENSIONS

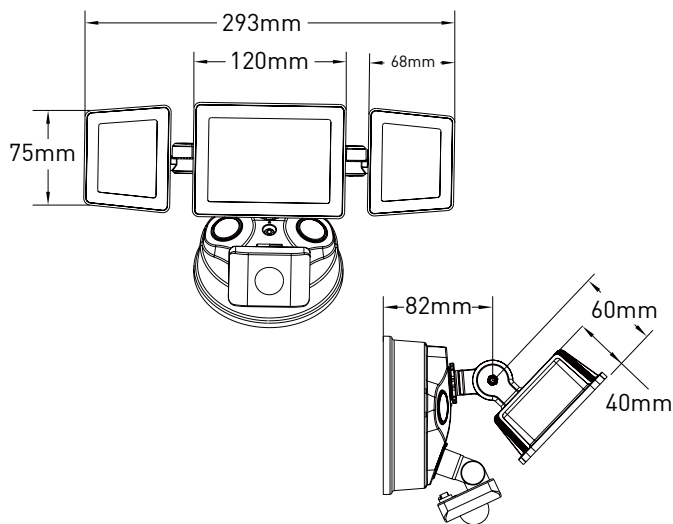

US 3CCT Round Photosensitive LED Security Light

FINISH COLOUR




COLOUR TEMPERATURE



SPECIFICATIONS

Code	WL-YER03-230P-D8
Wattage	30W
CCT(K)	3000K/4000K/6500K
Lumens	2400lm
Efficiency	80lm/W
CRI	> 80
Beam Angle	90°/head
Input	110-130V~60Hz
Dimmable	No
Operating Temp.	-20°C ~+45°C
Working Mode	D2D/On Time
Detection Brightness	<10Lux or >50Lux
Material	PC

DIMENSIONS

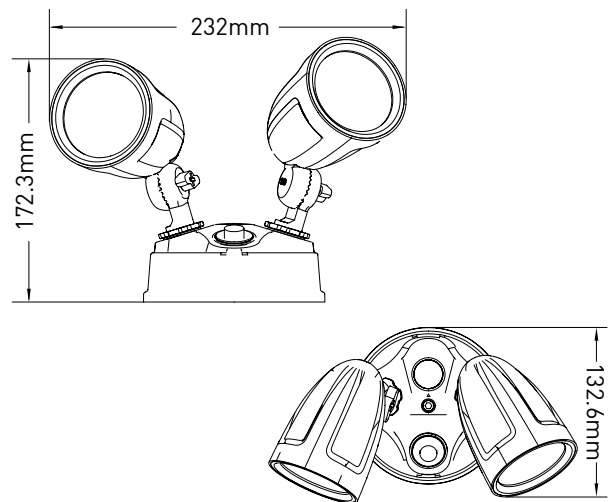

US Remote Control High Lumen Output Security Light

FINISH COLOUR




COLOUR TEMPERATURE



SPECIFICATIONS

Code	WL-YER-230P-D4
Wattage	30W
CCT(K)	3000-6500K
Lumens	2400lm
Efficiency	80lm/W
CRI	> 80
Beam Angle	90°/head
Input	110-130V~60Hz
Dimmable	Yes
Operating Temp.	-20°C ~+45°C
Working Mode	Auto/D2D/On Time
Detection Angle	120°
Detection Brightness	5-2000Lux
Duration Time	15s/30s/1M/2M
Detection Distance	10m max
Material	Aluminum+PC

DIMENSIONS

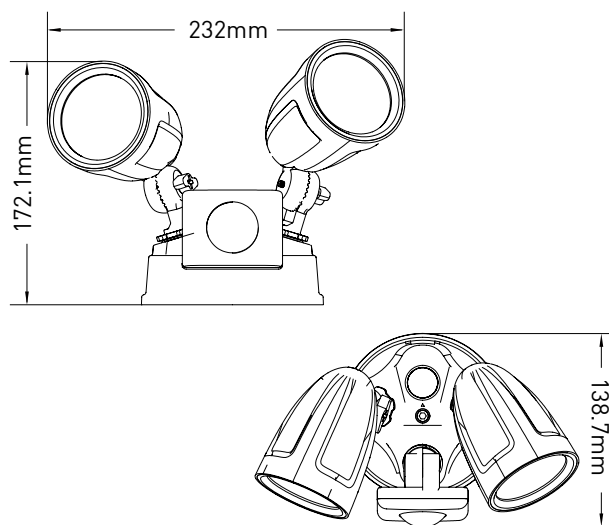

US Color Switchable LED Security Light

FINISH COLOUR




COLOUR TEMPERATURE



SPECIFICATIONS

Code	WL-YER-230P
Wattage	30W
CCT(K)	3000K/4000K/6500K
Lumens	2400lm
Efficiency	80lm/W
CRI	> 80
Beam Angle	90°/head
Input	110-130V~60Hz
Dimmable	No
Operating Temp.	-20°C ~+45°C
Working Mode	Auto/On Time
Detection Angle	120°
Detection Brightness	5-2000Lux
Detection Duration	3secs-8mins
Detection Distance	10m max
Material	Aluminum+PC

DIMENSIONS

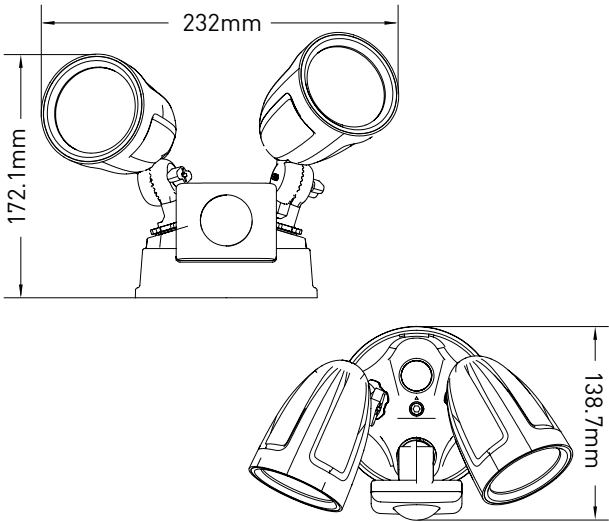

US 3CCT Square Photosensitive LED Security Light

FINISH COLOUR




COLOUR TEMPERATURE



SPECIFICATIONS

Code	WL-YES03-260P-D8
Wattage	60W
CCT(K)	3000K/4000K6500K
Lumens	4800lm
Efficiency	80lm/W
CRI	> 80
Beam Angle	90°/head
Input	110-130V~60Hz
Dimmable	No
Operating Temp.	-20°C ~+45°C
Working Mode	D2D/On Time
Detection Brightness	<10Lux or >50Lux
Material	Aluminum+PC

DIMENSIONS

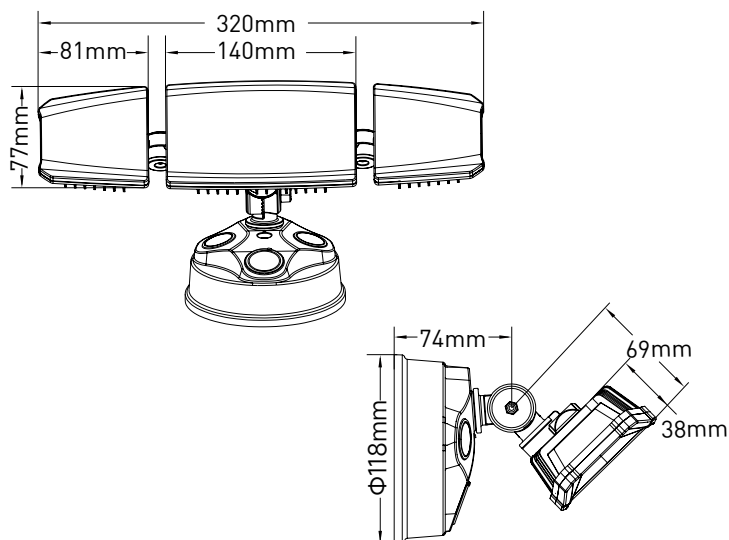

US Color Switchable LED Security Light

FINISH COLOUR




COLOUR TEMPERATURE



SPECIFICATIONS

Code	WL-YES-260P-D4
Wattage	60W
CCT(K)	3000-6500K
Lumens	4800lm
Efficiency	80lm/W
CRI	> 80
Beam Angle	90°/head
Input	110-130V~60Hz
Dimmable	Yes
Operating Temp.	-20°C ~+45°C
Working Mode	Auto/D2D/On Time
Detection Angle	120°
Detection Brightness	5-2000Lux
Detection Duration	15s/30s/1M/2M
Detection Distance	10m max
Material	Aluminum+PC

DIMENSIONS

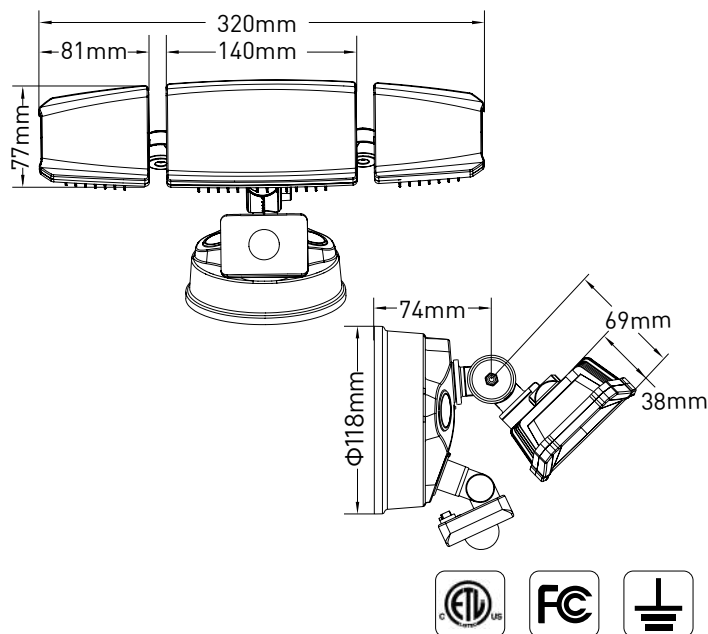

US Color Switchable LED Security Light

FINISH COLOUR




COLOUR TEMPE



SPECIFICATIONS

Code	WL-YES-260P
Wattage	60W
CCT(K)	3000K/4000K/6500K
Lumens	4800lm
Efficiency	80lm/W
CRI	> 80
Beam Angle	90°/head
Input	110-130V~60Hz
Dimmable	No
Operating Temp.	-20°C ~+45°C
Working Mode	D2D/On Time
Detection Angle	120°
Detection Brightness	5-2000Lux
Detection Distance	10m max
Detection Duration	3secs-8mins
Material	Aluminum+PC

DIMENSIONS

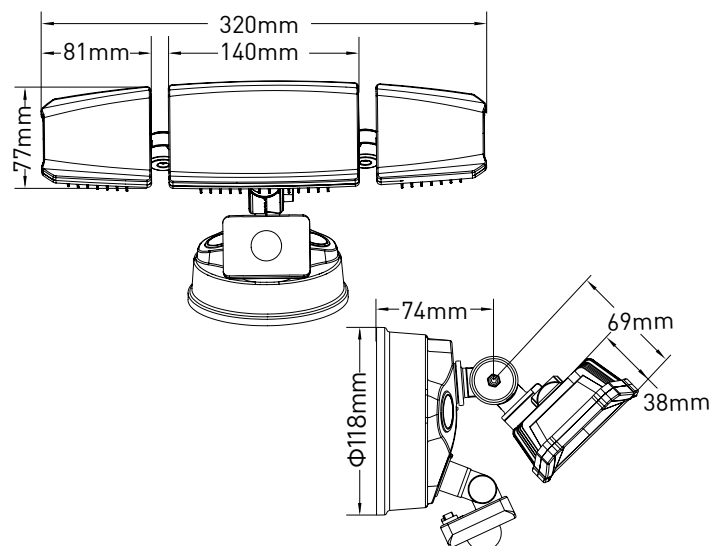

EU & AU Standard

I Smart Pro



SE series



SP series



SP series



SHII series



SHIII series



YDR series



YDS series



FLB series



CLB series

I Downlight



SH AG series



SH AG series



SH SAG series



SHII series



SHIII series



SF series



SQ series



SQ series



SP series



SP series



SI series



SI series



SI series



SI series



SA series



SS series



SO series



SO series



SD series



YF series

I Security Light



YDR series



YDR series



YDS series



YDS series



YC2R series



YB2R series



YA2R series




FLB series




FLB series

Slimline Smart LED Downlight

FINISH COLOUR

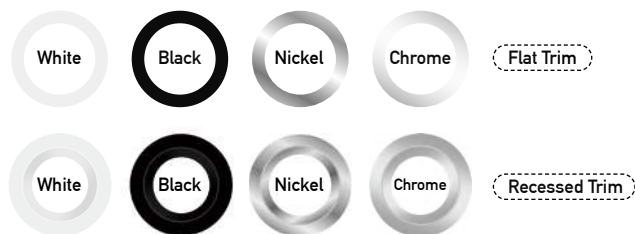



COLOUR TEMPERATURE




SPECIFICATIONS

Code	DL-SH225-108D5	DL-SH230-110D5
Wattage	8W	
CCT(K)	3000K-6500K&RGB	
Lumens	600lm	
Efficiency	75lm/W	
CRI	> 80	
Beam Angle	110°	
Input	220-240V~50/60Hz	
Dimmable	Yes	
Operating Temp.	-20℃ ~+45℃	
Dimension(DxH)	94x35mm	113.5x35mm
Material	Nylon + Aluminum+PC	

DIMENSIONS




8W Cutout: 70-80mm
10W Cutout: 90-100mm




Slimline Smart LED Downlight

FINISH COLOUR

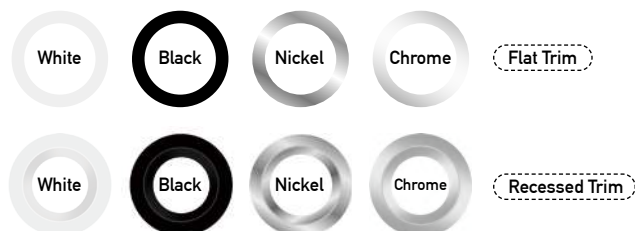




COLOUR TEMPERATURE



SPECIFICATIONS

Code	DL-SH330-110D5
Wattage	10W
CCT(K)	3000K-5700K&RGB
Lumens	750lm
Efficiency	75lm/W
CRI	> 80
Beam Angle	110°
Input	220-240V~50/60Hz
Dimmable	Yes
Operating Temp.	-20°C ~+45°C
Dimension(DxH)	113.5x50mm
Material	Nylon + Aluminum+PC

DIMENSIONS



Fixed Slim Smart 5.5W Dimmable Led Downlight

FINISH COLOUR






COLOUR TEMPERATURE



SPECIFICATIONS

Code	DL-SP225F-106D5
Wattage	5.5W
CCT(K)	3000K-6500K&RGB
Lumens	480lm
Efficiency	85lm/W
CRI	> 80
Beam Angle	60°/120°
Input	220-240V~50/60Hz
Dimmable	Yes
Operating Temp.	-20℃ ~+45℃
Dimension(DxH)	83x32mm
Material	Nylon + Aluminum+PC

DIMENSIONS

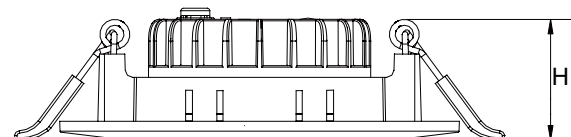


Tilt Slim Smart 5.5W Dimmable Led Downlight

FINISH COLOUR





COLOUR TEMPERATURE




SPECIFICATIONS

Code	DL-SP225G-106D5
Wattage	5.5W
CCT(K)	3000K-6500K&RGB
Lumens	480lm
Efficiency	85lm/W
CRI	> 80
Beam Angle	30°
Input	220-240V~50/60Hz
Dimmable	Yes
Operating Temp.	-20°C ~+45°C
Dimension(DxH)	85x32mm
Material	Nylon + Aluminum+PC

DIMENSIONS



Cutout: 75-78mm

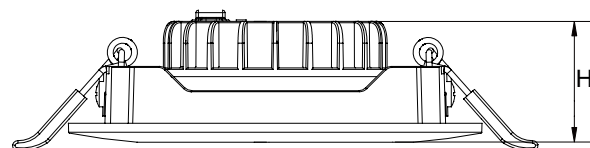


6W 70mm Cutout IP54 Smart LED Downligh

FINISH COLOUR






COLOUR TEMPERATURE



SPECIFICATIONS

Code	DL-SE25-106D5
Wattage	6W
CCT(K)	3000K-6500K&RGB
Lumens	570lm
Efficiency	95lm/W
CRI	> 80
Beam Angle	110°
Input	220-240V~50/60Hz
Dimmable	Yes
Operating Temp.	-20°C ~+45°C
Dimension(DxH)	85x33mm
Material	Nylon + Aluminum+PC

DIMENSIONS

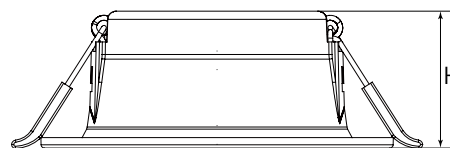


High Lumen Output IP54 Smart Ceiling Light

FINISH COLOUR





COLOUR TEMPERATURE



SPECIFICATIONS

Code	CL-B230-115D5	CL-B280-115D5	CL-B330-115D5
Wattage	15W	20W	25W
CCT(K)	3000K-5700K&RGB		
Lumens	1350lm	1800lm	2250lm
Efficiency	90lm/W		
CRI	> 80		
Beam Angle	120°		
Input	220-240V~50/60Hz		
Dimmable	Yes		
Operating Temp.	-20°C ~+45°C		
Dimension(DxH)	220x50mm	280x50mm	330x50mm
Material	PC		

DIMENSIONS




High Lumen Output Outdoor Smart Security Light

FINISH COLOUR




COLOUR TEMPERATURE



SPECIFICATIONS

Code	WL-YDR-124P-D5(BK)	WL-YDR-124P-D5(WH)
Wattage	24W	
CCT(K)	3000K-6500K	
Lumens	1900lm	2500lm
Efficiency	80lm/W	105lm/W
CRI	> 80	
Beam Angle	90°/head	
Input	220-240V~50/60Hz	
Operating Temp.	-20°C ~+45°C	
Detection Range	120°	
Detection brightness	5-2000Lux	
Detection Distance	10m max	
Detection Duration	3secs-8mins	
Material	PC	

DIMENSIONS

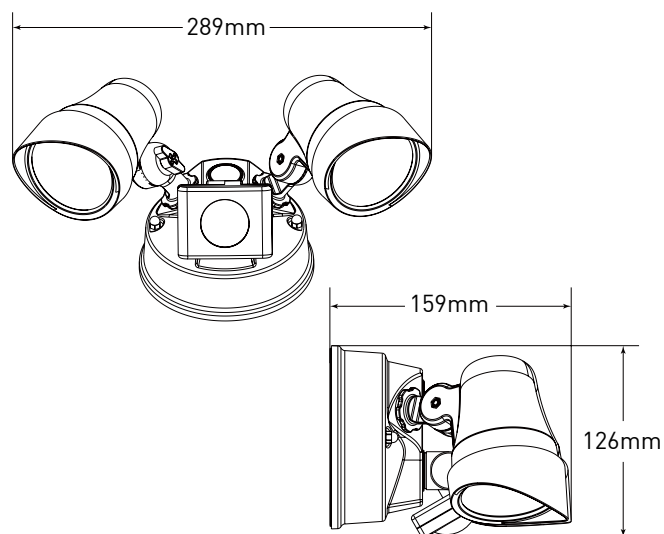

High Lumen Output Outdoor Smart Security Light

FINISH COLOUR




COLOUR TEMPERATURE



SPECIFICATIONS

Code	WL-YDS-130P-D5(BK)	WL-YDR-240P-D5(WH)
Wattage	30W	
CCT(K)	3000K-6500K	
Lumens	2400lm	2850lm
Efficiency	80lm/W	95lm/W
CRI	> 80	
Beam Angle	90°/head	
Input	220-240V~50/60Hz	
Operating Temp.	-20°C ~+45°C	
Detection Range	120°	
Detection brightness	5-2000Lux	
Detection Distance	10m max	
Detection Duration	3secs-8mins	
Material	PC+Glass	

DIMENSIONS

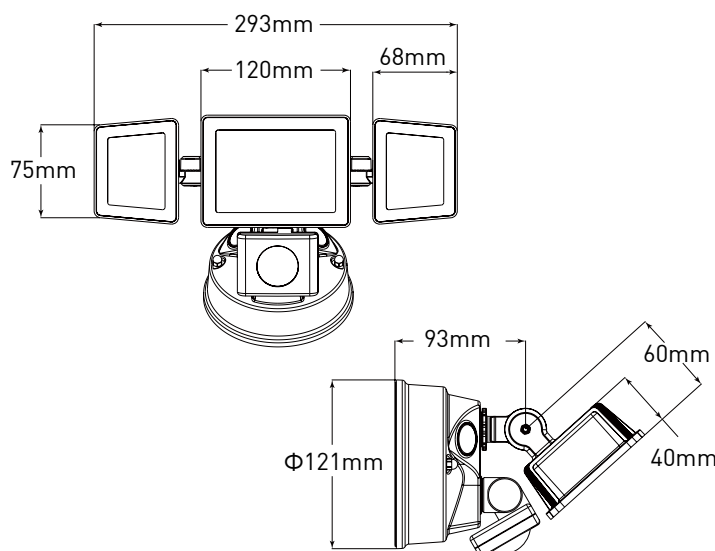

Smart LED Flood Light

FINISH COLOUR




COLOUR TEMPERATURE



SPECIFICATIONS

Code	FLB-115D5	FLB-130D5	FLB-150D5
Wattage	15W	30W	50W
CCT(K)	3000K-6500K&RGB		
Lumens	1200lm	2400lm	4000lm
Efficiency	80lm/W		
CRI	> 80		
Beam Angle	100°		
Input	220-240V~50/60Hz		
Dimmable	Yes		
Operating Temp.	-20℃ ~+45℃		
Material	Nylon/AL+Glass		
Dimension(LxWxH)	107x133.7x29.1mm(15W)		
Dimension(LxWxH)	136.8x165.5x29.1mm(30W)		
Dimension(LxWxH)	170.8x221.1x29.1mm(50W)		

DIMENSIONS

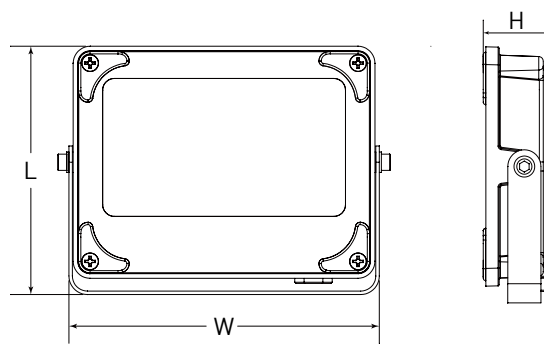

Fixed Slim Dimmable Led Downlight

FINISH COLOUR






COLOUR TEMPERATURE



SPECIFICATIONS

Code	DL-SP25F-106D3
Wattage	6W
CCT(K)	3000K/4000K/6500K
Lumens	520lm
Efficiency	85lm/W
CRI	> 80
Beam Angle	60°/120°
Input	220-240V~50/60Hz
Dimmable	Yes
Operating Temp.	-20°C ~+45°C
Dimension(DxH)	83x25mm
Material	Nylon+Aluminum+PC

DIMENSIONS

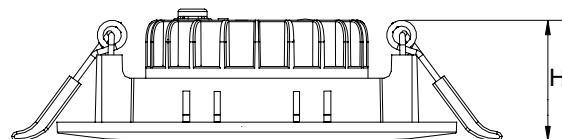

Tilt Slim Dimmable Led Downlight

FINISH COLOUR






COLOUR TEMPERATURE



SPECIFICATIONS

Code	DL-SP25G-106D3
Wattage	6W
CCT(K)	3000K/4000K/6500K
Lumens	520lm
Efficiency	85lm/W
CRI	> 80
Beam Angle	60°/120°
Input	220-240V-50/60Hz
Dimmable	Yes
Operating Temp.	-20°C ~+45°C
Tilt Angle	30°
Dimension(DxH)	85x25mm
Material	Nylon+Aluminum+PC

DIMENSIONS

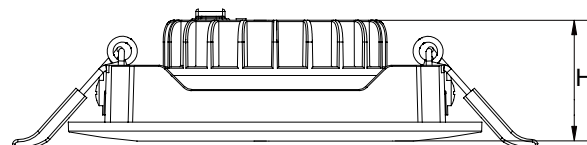

90mm Cutout 8W IP44 Triac Dimmable LED Downlights With 3CCT

FINISH COLOUR






COLOUR TEMPERATURE



SPECIFICATIONS


Code	DL-SR30-108D3
Wattage	8W
CCT(K)	3000K/4000K/5700K
Lumens	900lm
Efficiency	110lm/W
CRI	> 80
Beam Angle	110°
Input	220-240V~50/60Hz
Dimmable	Yes(Triac)
Operating Temp.	-20°C ~+45°C
Dimension(DxH)	105x30mm
Material	Aluminum+PC

DIMENSIONS

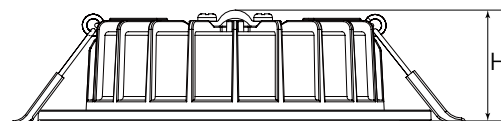

Anti-Glare 10W 3CCT Selectable LED Downlight

FINISH COLOUR

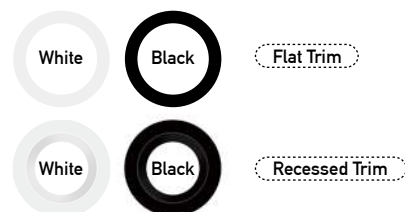


COLOUR TEMPERATURE



SPECIFICATIONS

Code	DL-SH230AG-110D3
Wattage	10W
CCT(K)	3000K/4000K/5700K
Lumens	850lm
Efficiency	85lm/W
CRI	> 80
Beam Angle	60°
Input	220-240V~50/60Hz
Dimmable	Yes(Triac)
Operating Temp.	-20°C ~+45°C
Dimension(DxH)	114x35mm
Material	Nylon+Aluminum+PC

DIMENSIONS

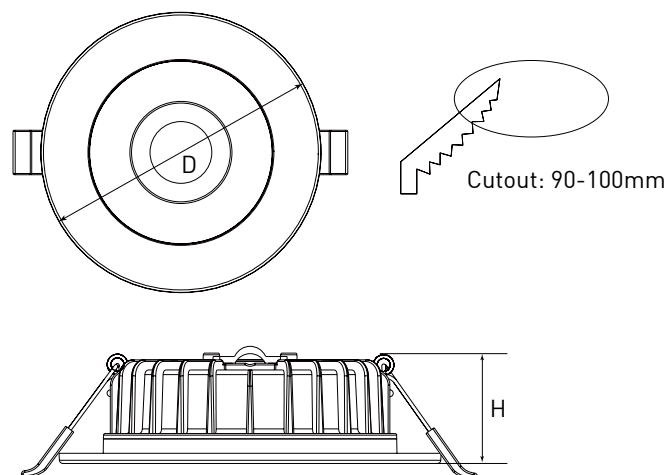

Anti-Glare 10W 3CCT Selectable LED Downlight

FINISH COLOUR






COLOUR TEMPERATURE



SPECIFICATIONS


Code	DL-SH230SAG-110D3
Wattage	10W
CCT(K)	3000K/4000K/5700K
Lumens	850lm
Efficiency	85lm/W
CRI	> 80
Beam Angle	60°
Input	220-240V~50/60Hz
Dimmable	Yes(Triac)
Operating Temp.	-20°C ~+45°C
Dimension(DxH)	114x55mm
Material	Nylon+Aluminum+PC

DIMENSIONS

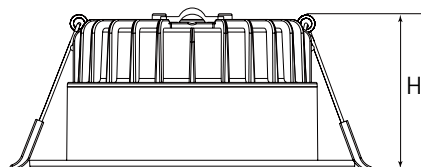

Colour Changeable Slimline LED Downlight

FINISH COLOUR

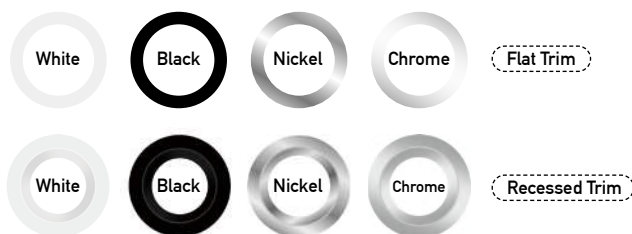


COLOUR TEMPERATURE



SPECIFICATIONS


Code	DL-SH225-108D3	DL-SH230(C)-110D3
Wattage	8W	10W
CCT(K)	3000K/4000K/5700K	
Lumens	640lm	900lm
Efficiency	80lm/W	
CRI	> 80	
Beam Angle	110°	
Input	220-240V~50/60Hz	
Dimmable	Yes	
Operating Temp.	-20°C ~+45°C	
Tilt Angle	30°	
Dimension(DxH)	94x35mm	113.5x35mm
Material	Nylon+Aluminum+PC	

DIMENSIONS

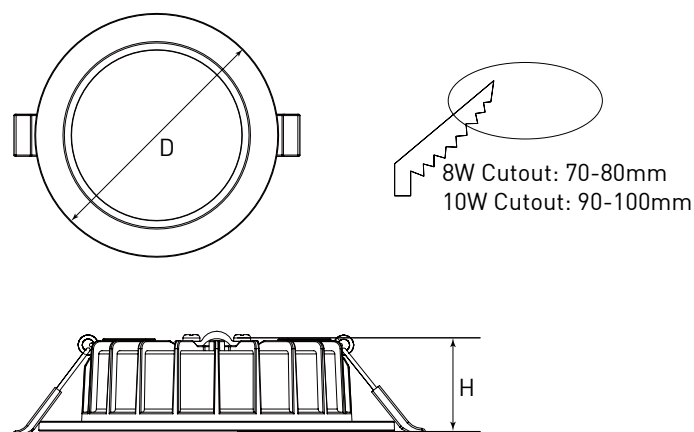

Colour Adjustable LED Downlight With Interchangeable Bezels

FINISH COLOUR

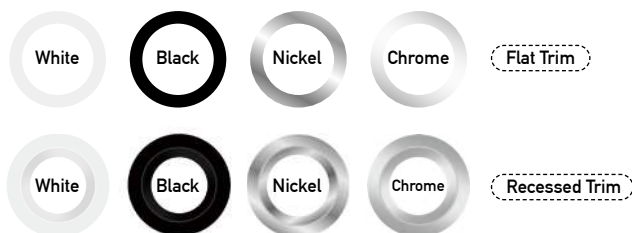


COLOUR TEMPERATURE



SPECIFICATIONS


Code	DL-SH330AG-110D3
Wattage	10W
CCT(K)	3000K/4000K/5700K
Lumens	950lm
Efficiency	95lm/W
CRI	> 80
Beam Angle	110°
Input	220-240V~50/60Hz
Dimmable	Yes(Triac)
Operating Temp.	-20°C ~+45°C
Dimension(DxH)	113.5x49.7mm
Material	Nylon+Aluminum+PC

DIMENSIONS

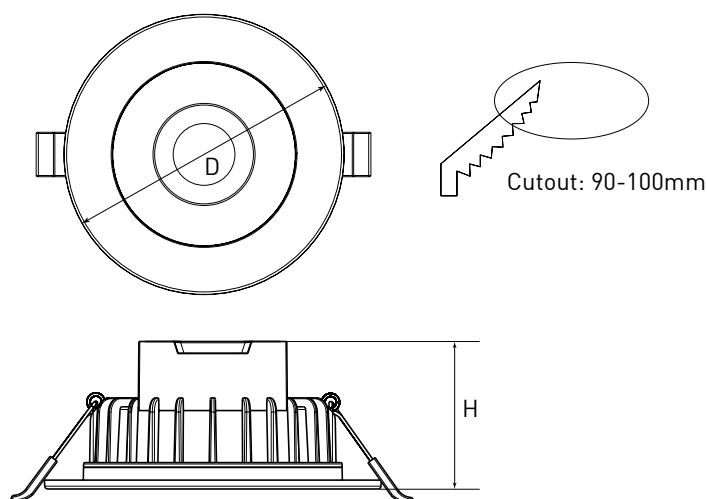

Colour Adjustable LED Downlight With Interchangeable Bezels

FINISH COLOUR

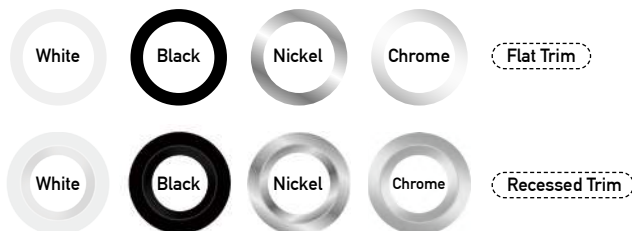


COLOUR TEMPERATURE



SPECIFICATIONS


Code	DL-SH330SAG-110D3
Wattage	10W
CCT(K)	3000K/4000K/5700K
Lumens	950lm
Efficiency	95lm/W
CRI	> 80
Beam Angle	110°
Input	220-240V~50/60Hz
Dimmable	Yes(Triac)
Operating Temp.	-20°C ~+45°C
Dimension(DxH)	113.5x71mm
Material	Nylon+Aluminum+PC

DIMENSIONS

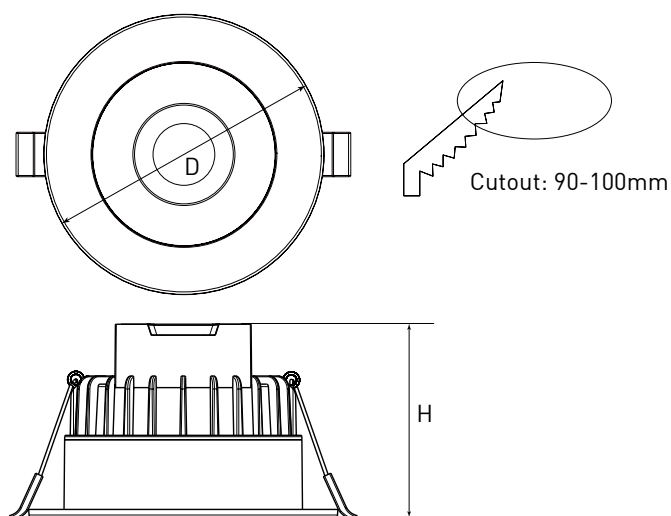

Colour Adjustable LED Downlight With Interchangeable Bezels

FINISH COLOUR

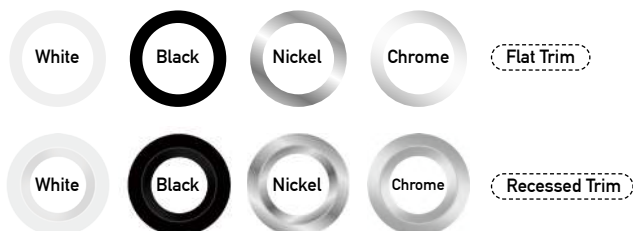




COLOUR TEMPERATURE



SPECIFICATIONS

Code	DL-SH330(C)-110D3
Wattage	10W
CCT(K)	3000K/4000K/5700K
Lumens	950lm
Efficiency	95lm/W
CRI	> 80
Beam Angle	110°
Input	220-240V~50/60Hz
Dimmable	Yes(Triac)
Operating Temp.	-20°C ~+45°C
Dimension(DxH)	113.5x60mm
Material	Nylon+Aluminum+PC


DIMENSIONS



Anti-Glare Colour Changeable Dimmable LED Downlight With Lens

SPECIFICATIONS


Code	DL-SI230AG-110D3
Wattage	10W
CCT(K)	3000K/4000K/5700K
Lumens	900lm
Efficiency	80lm/W
CRI	> 80
Beam Angle	110°
Input	220-240V~50/60Hz
Dimmable	Yes
Operating Temp.	-20°C ~+45°C
Dimension(DxH)	113x55mm
Material	Nylon+Aluminum+PC

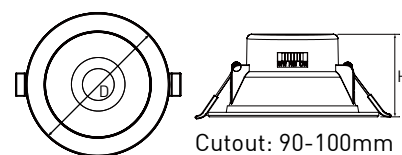

Low Glare Colour Changeable Dimmable LED Downlight

SPECIFICATIONS

Code	DL-SI230R-110D3
Wattage	10W
CCT(K)	3000K/4000K/5700K
Lumens	900lm
Efficiency	90lm/W
CRI	> 80
Beam Angle	110°
Input	220-240V~50/60Hz
Dimmable	Yes
Operating Temp.	-20°C ~+45°C
Dimension(DxH)	119x61mm
Material	Nylon+Aluminum+PC

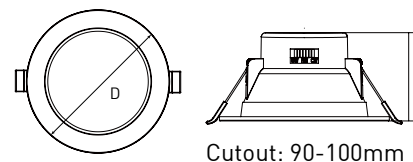

PIR Motion Sensor Colour Changeable LED Downlight

SPECIFICATIONS

Code	DL-SI230-110P3
Wattage	10W
CCT(K)	3000K/4000K/5700K
Lumens	800lm
Efficiency	80lm/W
CRI	> 80
Beam Angle	110°
Input	220-240V~50/60Hz
Operating Temp.	-20°C ~+45°C
Detection Range	360°
Detection Distance	5m max
Detection Duration	1hr max
Dimension(DxH)	113x65mm
Material	Nylon+Aluminum+PC



Cutout: 90-100mm



Microwave Sensor Colour Changeable LED Downlight

SPECIFICATIONS

Code	DL-SI230-110MP3
Wattage	10W
CCT(K)	3000K/4000K/5700K
Lumens	850lm
Efficiency	85lm/W
CRI	> 80
Beam Angle	110°
Input	220-240V~50/60Hz
Operating Temp.	-20°C ~+45°C
Detection Range	360°
Detection Distance	5m max
Detection Duration	1hr max
Dimension(DxH)	113x55mm
Material	Nylon+Aluminum+PC



Cutout: 90-100mm



Colour Changeable LED Downlight Four Dimensions Available

FINISH COLOUR






COLOUR TEMPERATURE



SPECIFICATIONS

Code	SI225-108D3	SI230-110D3	SI235-112D3	SI240-114D3
Wattage	8W	10W	12W	14W
CCT(K)	3000K/4000K/5700K			
Lumens	750lm	900lm	1100lm	1300lm
Efficiency	90lm/W			
CRI	> 80			
Beam Angle	110°			
Input	220-240V~50/60Hz			
Dimmable	Yes			
Operating Temp.	-20°C ~+45°C			
Dimension(DxH)	95x50mm	113x57mm	130x60mm	145x65mm
Material	Nylon+Aluminum+PC			

DIMENSIONS

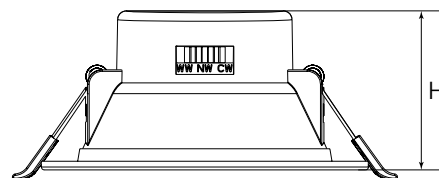

Colour Changeable IP44 Dimmable LED Downlight

FINISH COLOUR




COLOUR TEMPERATURE



SPECIFICATIONS

Code	DL-SA330-110D3
Wattage	10W
CCT(K)	3000K/4000K/5700K
Lumens	900lm
Efficiency	90lm/W
CRI	> 80
Beam Angle	110°
Input	220-240V~50/60Hz
Dimmable	Yes
Operating Temp.	-20°C ~+45°C
Dimension(DxH)	113x56mm
Material	Nylon+Aluminum+PC

DIMENSIONS

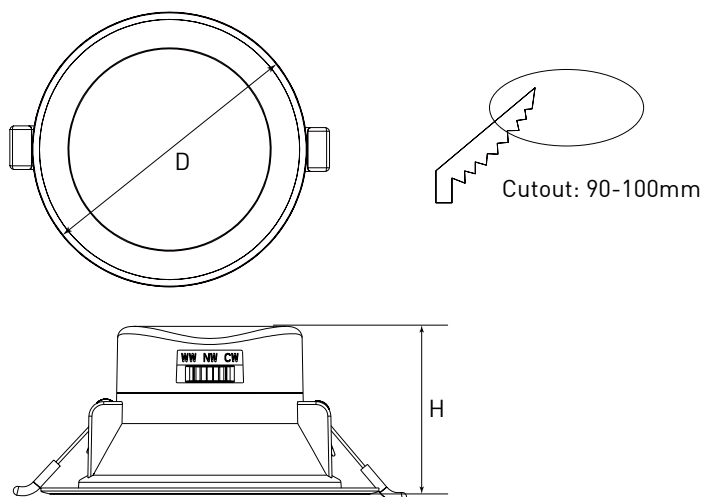

Anti-Glare 4CCT Changeable Dimmable LED Downlight

FINISH COLOUR






COLOUR TEMPERATURE



SPECIFICATIONS

Code	DL-SD30-108D4
Wattage	8W
CCT(K)	3000K/4000K/5000K/6500K
Lumens	750lm
Efficiency	95lm/W
CRI	> 80
Beam Angle	60°
Input	220-240V~50/60Hz
Dimmable	Yes
Operating Temp.	-20°C ~+45°C
Dimension(DxH)	103x55mm
Material	Nylon+Aluminum+PC

DIMENSIONS



Color Adjustable Dimmable Slim LED Downlight

FINISH COLOUR




COLOUR TEMPERATURE



SPECIFICATIONS


Code	DL-SF25-106D3	DL-SF30-108D3
Wattage	6W	8W
CCT(K)	3000K/4000K/6500K	
Lumens	480lm	640lm
Efficiency	80lm/W	
CRI	> 80	
Beam Angle	110°	
Input	220-240V~50/60Hz	
Dimmable	Yes(Triac)	
Operating Temp.	-20°C ~+45°C	
Dimension(DxH)	100x32mm	113x32.4mm
Material	PA+PC	

DIMENSIONS

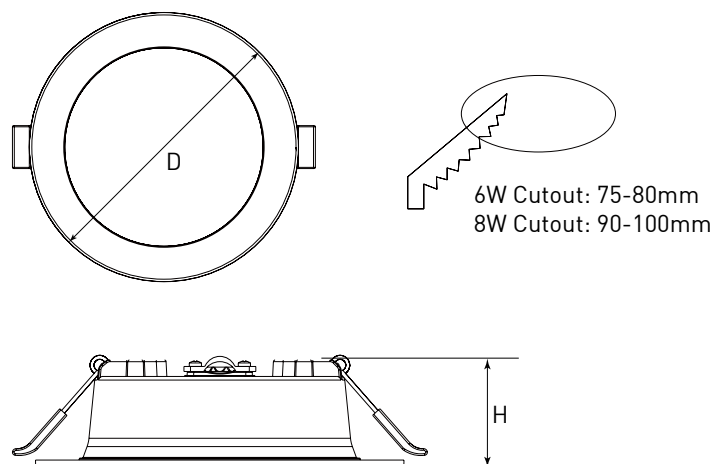

Slim Colour Changeable Dimmable LED Downlight

FINISH COLOUR




COLOUR TEMPERATURE



SPECIFICATIONS

Code	DL-SQ25R-107LND3
Wattage	7W
CCT(K)	3000K/4000K/6500K
Lumens	560lm
Efficiency	80lm/W
CRI	> 80
Beam Angle	110°
Input	220-240V~50/60Hz
Dimmable	Yes
Operating Temp.	-20°C ~+45°C
Dimension(DxH)	85x29mm
Material	Nylon+Aluminum+PC

DIMENSIONS

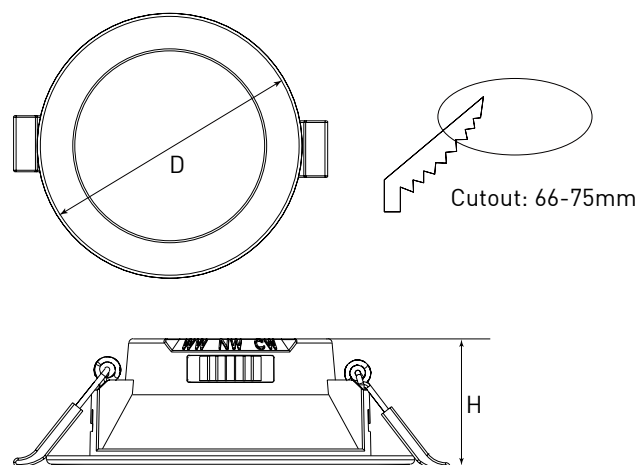

Slim Colour Changeable Dimmable LED Downlight

FINISH COLOUR




COLOUR TEMPERATURE



SPECIFICATIONS

Code	DL-SQ25S-107LND3
Wattage	7W
CCT(K)	3000K/4000K/6500K
Lumens	560lm
Efficiency	80lm/W
CRI	> 80
Beam Angle	110°
Input	220-240V~50/60Hz
Dimmable	Yes
Operating Temp.	-20°C ~+45°C
Dimension(DxH)	85x29mm
Material	Nylon+Aluminum+PC

DIMENSIONS

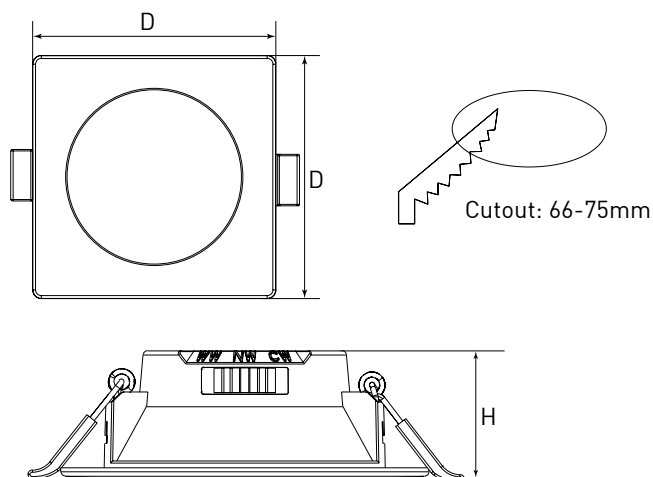

4W/5W/7W Ultra Slim Colour Changeable LED Downlight

FINISH COLOUR





COLOUR TEMPERATURE




SPECIFICATIONS

Code	SS20-104LND3	SS25-105LND3	SS30-107LND3
Wattage	4W	5W	7W
CCT(K)	3000K/4000K/6500K		
Lumens	320lm	400lm	600lm
Efficiency	80lm/W		
CRI	> 80		
Beam Angle	110°		
Input	220-240V~50/60Hz		
Dimmable	Yes		
Operating Temp.	-20°C ~+45°C		
Dimension(DxH)	78x30mm	94.5x31mm	113x31mm
Material	PP+PS		

DIMENSIONS




4W Cutout: 55-68mm
5W Cutout: 75-85mm
7W Cutout: 90-100mm

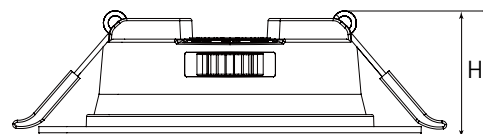

10W/15W/22W Ultra Slim Colour Changeable LED-Downlight

FINISH COLOUR





COLOUR TEMPERATURE




SPECIFICATIONS

Code	SS40-110LND3	SS60-115LND3	SS80-122LND3
Wattage	10W	15W	22W
CCT(K)	3000K/4000K/6500K		
Lumens	850lm	1300lm	1900lm
Efficiency	85lm/W		
CRI	> 80		
Beam Angle	110°		
Input	220-240V~50/60Hz		
Dimmable	Yes		
Operating Temp.	-20°C ~+45°C		
Dimension(DxH)	148x31mm	175x32mm	220x32mm
Material	PP+PS		

DIMENSIONS



10W Cutout: 125-135mm
15W Cutout: 145-165mm
22W Cutout: 185-210mm



Anti-Glare Tiltable Colour Changeable LED Downlight

FINISH COLOUR






COLOUR TEMPERATURE



SPECIFICATIONS

Code	DL-S030T-109D3
Wattage	9W
CCT(K)	3000K/4000K/5700K
Lumens	720lm
Efficiency	80lm/W
CRI	> 80
Beam Angle	60°
Input	220-240V~50/60Hz
Dimmable	Yes
Operating Temp.	-20°C ~+45°C
Dimension(DxH)	110x33mm
Material	Nylon+ Aluminum+PC

DIMENSIONS



Tiltable Colour Changeable LED Downlight With Dimmable Driver

FINISH COLOUR






COLOUR TEMPERATURE



SPECIFICATIONS

Code	DL-S030T-S109D3
Wattage	9W
CCT(K)	3000K/4000K/5700K
Lumens	720lm
Efficiency	80lm/W
CRI	> 80
Beam Angle	110°
Input	220-240V~50/60Hz
Dimmable	Yes
Operating Temp.	-20°C ~+45°C
Dimension(DxH)	110x33mm
Material	Nylon+ Aluminum+PC

DIMENSIONS

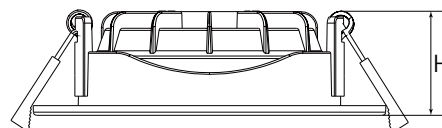

Colour Switchable LED Downlight With Isolated Dimmable Driver

FINISH COLOUR




COLOUR TEMPERATURE




SPECIFICATIONS

Code	DL-YB25-109D3	DL-YF30-112D3	DL-YB40-115D3
Wattage	9W	12W	15W
CCT(K)	3000K/4000K/5700K		
Lumens	800lm	1100lm	1350lm
Efficiency	80lm/W		
CRI	> 80		
Beam Angle	110°		
Input	220-240V~50/60Hz		
Dimmable	Yes		
Operating Temp.	-20°C ~+45°C		
Dimension(DxH)	85x40mm	113x40mm	150x45mm
Material	Aluminum+PC		

DIMENSIONS



9W Cutout: 70-75mm
12W Cutout: 90-100mm
15W Cutout: 120-130mm

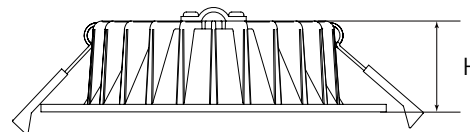

Remote Control High Lumen Output Security Light

FINISH COLOUR





COLOUR TEMPERATURE



SPECIFICATIONS

Code	WL-YDR-124P-D4(BK)	WL-YDR-124P-D4(WH)
Wattage	24W	
CCT(K)	3000-6500K	
Lumens	1900lm	2500lm
Efficiency	80lm/W	105lm/W
CRI	> 80	
Beam Angle	90°/head	
Input	220-240V~50/60Hz	
Dimmable	No	
Operating Temp.	-20°C ~+45°C	
Working Mode	Auto/D2D/On Time	
Detection Angle	120°	
Detection Brightness	5-2000Lux	
Detection Distance	10m max	
Detection Duration	15s/30s/1m/2m	
Material	PC	

DIMENSIONS

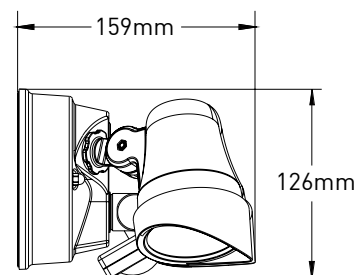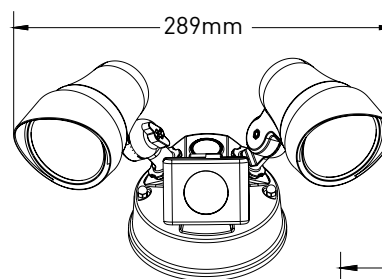

Remote Control High Lumen Output Security Light

FINISH COLOUR





COLOUR TEMPERATURE



SPECIFICATIONS

Code	WL-YDR-124P(BK)	WL-YDR-124P(WH)
Wattage	24W	
CCT(K)	3000K/4000K/6500K	
Lumens	1900lm	2500lm
Efficiency	80lm/W	105lm/W
CRI	> 80	
Beam Angle	90°/head	
Input	220-240V~50/60Hz	
Dimmable	No	
Operating Temp.	-20°C ~+45°C	
Detection Angle	120°	
Detection Brightness	5-2000Lux	
Detection Distance	10m max	
Detection Duration	3secs-8mins	
Material	PC	

DIMENSIONS

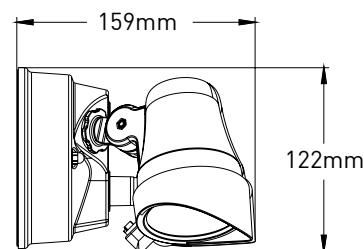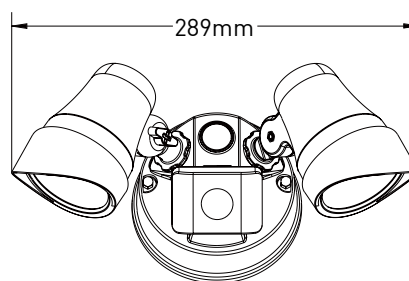

Colour Changing LED Security Light

FINISH COLOUR





COLOUR TEMPERATURE



SPECIFICATIONS

Code	WL-YDR-124(BK)	WL-YDR-124(WH)
Wattage	24W	
CCT(K)	3000K/4000K/6500K	
Lumens	1900lm	2500lm
Efficiency	80lm/W	105lm/W
CRI	> 80	
Beam Angle	90°/head	
Input	220-240V~50/60Hz	
Dimmable	No	
Operating Temp.	-20°C ~+45°C	
Material	PC	

DIMENSIONS

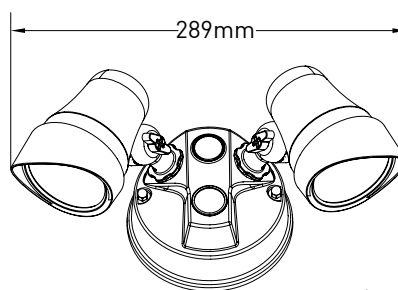

Colour Changing LED Security Light

FINISH COLOUR





COLOUR TEMPERATURE



SPECIFICATIONS

Code	WL-YDR-112P(BK)	WL-YDR-112P(WH)
Wattage	12W	
CCT(K)	3000K/4000K/6500K	
Lumens	950lm	1200lm
Efficiency	80lm/W	100lm/W
CRI	> 80	
Beam Angle	90°	
Input	220-240V-50/60Hz	
Dimmable	No	
Operating Temp.	-20°C ~+45°C	
Detection Angle	140°	
Detection Brightness	5-2000Lux	
Detection Distance	10m max	
Detection Duration	3secs-8mins	
Material	Aluminum+PC	

DIMENSIONS

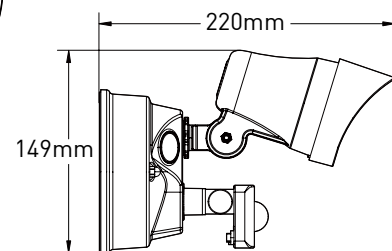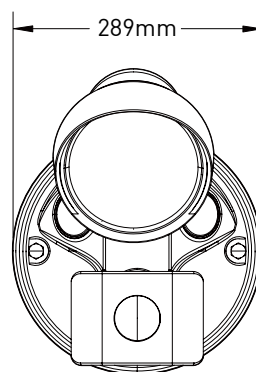

Colour Selectable LED Wall Security Light

FINISH COLOUR





COLOUR TEMPERATURE



SPECIFICATIONS

Code	WL-YDR-112(BK)	WL-YDR-112(WH)
Wattage	12W	
CCT(K)	3000K/4000K/6500K	
Lumens	950lm	1200lm
Efficiency	80lm/W	100lm/W
CRI	> 80	
Beam Angle	90°	
Input	220-240V~50/60Hz	
Dimmable	No	
Operating Temp.	-20°C ~+45°C	
Material	Aluminum+PC	

DIMENSIONS

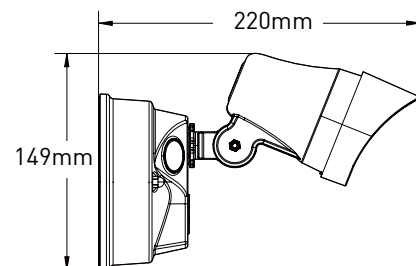

Remote Control High Lumen Output Security Light

FINISH COLOUR




COLOUR TEMPERATURE



SPECIFICATIONS


Code	WL-YDS-130P-D4(BK)	WL-YDS-130P-D4(WH)
Wattage	30W	
CCT(K)	3000-6500K	
Lumens	2850lm	2400lm
Efficiency	95lm/W	80lm/W
CRI	> 80	
Beam Angle	90°/head	
Input	220-240V~50/60Hz	
Dimmable	Yes	
Operating Temp.	-20°C ~+45°C	
Working Mode	Auto/D2D/On Time	
Detection Angle	120°	
Detection Distance	10m max	
Detection Duration	15s/30s/1m/2m	
Material	PC+Glass	

DIMENSIONS

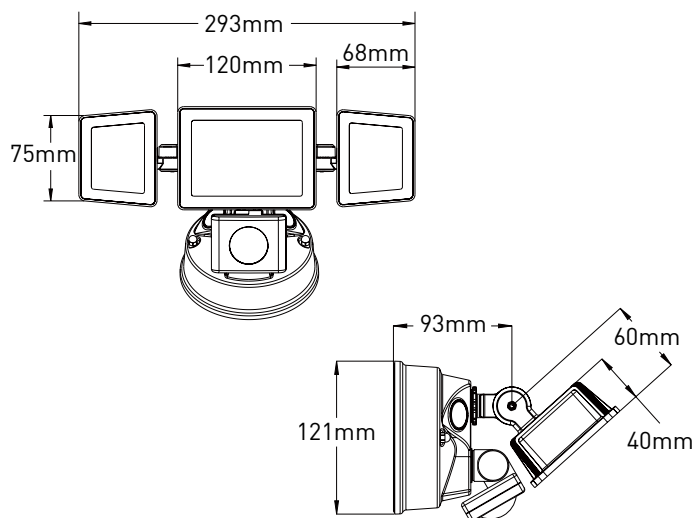

Colour Changing LED Security Light

FINISH COLOUR





COLOUR TEMPERATURE



SPECIFICATIONS

Code	WL-YDS-130P(BK)	WL-YDS-130P(WH)
Wattage	30W	
CCT(K)	3000-6500K	
Lumens	2850lm	2400lm
Efficiency	95lm/W	80lm/W
CRI	> 80	
Beam Angle	90°/head	
Input	220-240V~50/60Hz	
Dimmable	Yes	
Operating Temp.	-20°C ~+45°C	
Working Mode	Auto/D2D/On Time	
Detection Angle	120°	
Detection brightness	5-2000Lux	
Detection Distance	10m max	
Detection Duration	3secs-8mins	
Material	PC+Glass	

DIMENSIONS

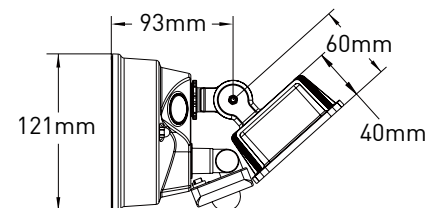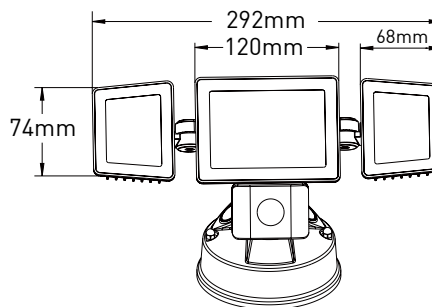

3CCT Adjustable LED Security Light

FINISH COLOUR





COLOUR TEMPERATURE



SPECIFICATIONS

Code	WL-YDS-130(BK)	WL-YDS-130(WH)
Wattage	30W	
CCT(K)	3000K/4000K/6500K	
Lumens	2850lm	2400lm
Efficiency	95lm/W	80lm/W
CRI	> 80	
Beam Angle	90°/head	
Input	220-240V~50/60Hz	
Dimmable	No	
Operating Temp.	-20°C ~+45°C	
Material	PC+Glass	

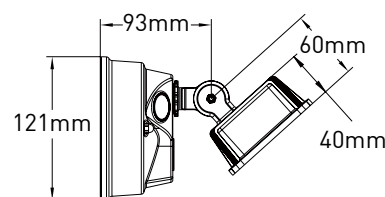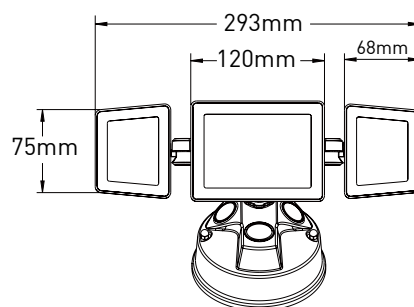

Colour Changing LED Security Light

FINISH COLOUR




COLOUR TEMPERATURE



SPECIFICATIONS

Code	WL-YC2R-030P
Wattage	30W
CCT(K)	3000K/4000K/6000K Optional
Lumens	2400lm
Efficiency	80lm/W
CRI	> 80
Beam Angle	90°/head
Input	220-240V~50/60Hz
Dimmable	No
Operating Temp.	-20°C ~+45°C
Detection Angle	160°
Detection brightness	5-2000Lux
Detection Distance	12m max
Detection Duration	7secs-10mins
Manual Override	Yes
Material	Die-cast AL+PC+Glass

DIMENSIONS

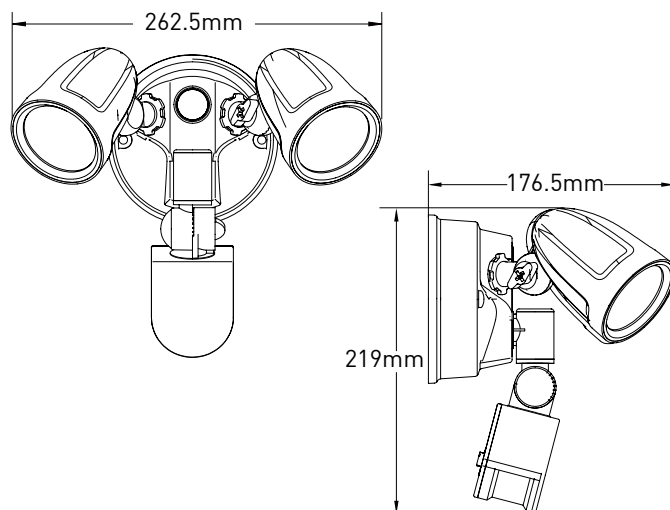

PIR Motion Sensor Twin LED Security Light

FINISH COLOUR




COLOUR TEMPERATURE



SPECIFICATIONS

Code	WL-YB2R-020P
Wattage	20W
CCT(K)	3000K/4000K/6000K Optional
Lumens	1400lm
Efficiency	70lm/W
CRI	> 80
Beam Angle	90°/head
Input	220-240V~50/60Hz
Dimmable	No
Operating Temp.	-20°C ~+45°C
Detection Angle	160°
Detection brightness	5-2000Lux
Detection Distance	12m max
Detection Duration	7secs-10mins
Manual Override	Yes
Material	Die-cast AL+PC+Glass

DIMENSIONS

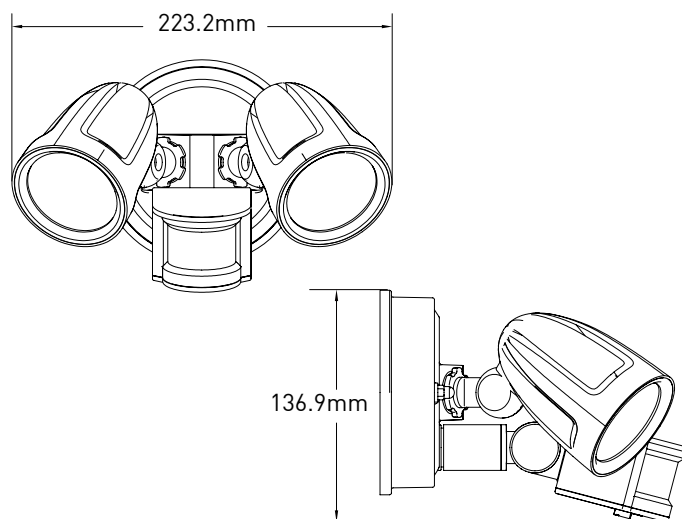

PIR Motion Sensor Twin LED Security Light

FINISH COLOUR





COLOUR TEMPERATURE




SPECIFICATIONS

Code	WL-YA2R-030P
Wattage	30W
CCT(K)	3000K/4000K/6000K Optional
Lumens	2700lm
Efficiency	90lm/W
CRI	> 80
Beam Angle	90°/head
Input	220-240V~50/60Hz
Dimmable	No
Operating Temp.	-20°C ~+45°C
Detection Angle	160°
Detection brightness	5-2000Lux
Detection Distance	12m max
Detection Duration	7secs-10mins
Manual Override	Yes
Material	Die-cast AL+PC+Glass

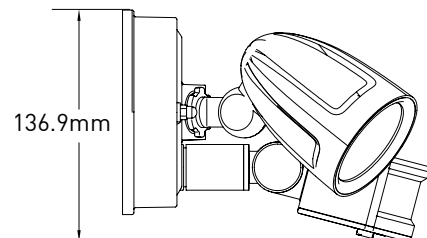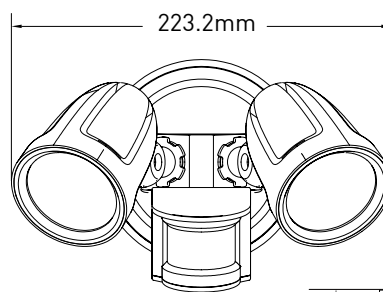

IP65 Remote Control LED Flood Light

FINISH COLOUR




COLOUR TEMPERATURE



SPECIFICATIONS

Code	FLB-115D4	FLB-130D4	FLB-150D4
Wattage	15W	30W	50W
CCT(K)	3000-6500K		
Lumens	1200lm	2400lm	4000lm
Efficiency	80lm/W		
CRI	> 80		
Beam Angle	100°		
Input	220-240V~50/60Hz		
Dimmable	Yes		
Operating Temp.	-20°C ~+45°C		
Detection Angle	120°		
Detection brightness	5-2000Lux		
Detection Distance	10m max		
Detection Duration	3secs-8mins		
Dimension(LxWxH)	161x134x53mm	185x166x53mm	218.2x221x53mm
Material	Nylon+Glass	AL+Glass	AL+Glass

DIMENSIONS

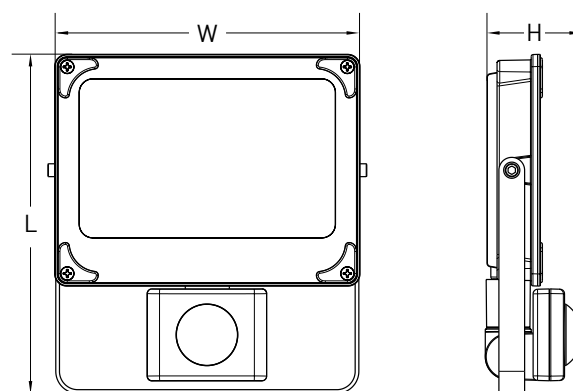

IP65 LED Flood Light with PIR Sensor

FINISH COLOUR




COLOUR TEMPERATURE



SPECIFICATIONS

Code	FLB-115P3	FLB-130P3	FLB-150P3
Wattage	15W	30W	50W
CCT(K)	3000K/4000K/6500K		
Lumens	1200lm	2400lm	4000lm
Efficiency	80lm/W		
CRI	> 80		
Beam Angle	100°		
Input	220-240V~50/60Hz		
Dimmable	Yes		
Operating Temp.	-20°C ~+45°C		
Detection Angle	120°		
Detection brightness	5-2000Lux		
Detection Distance	10m max		
Detection Duration	3secs-8mins		
Dimension(LxWxH)	161x134x53mm	185x166x53mm	218.2x221x53mm
Material	Nylon+Glass	AL+Glass	AL+Glass

DIMENSIONS

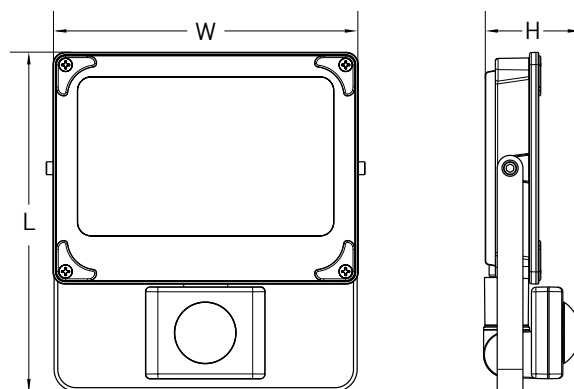

Global Standard

I Cabinet Light



ST series




UB01 series



UB05 series



UB02 series



UB04 series



OT-01A series



OT-0B series



OT-04 series



OT-05 series

12V Under Cabinet Slim LED Downlight

FINISH COLOUR




COLOUR TEMPERATURE



SPECIFICATIONS

Code	DL-ST20-504N3
Wattage	3.5W
CCT(K)	3000K/4000K/6000K
Lumens	250lm
Efficiency	70lm/W
CRI	> 80
Beam Angle	120°
Input	12V AC/DC
Dimmable	No
Operating Temp.	-20°C ~+45°C
Dimension(DxH)	70x18mm
Material	PC

DIMENSIONS

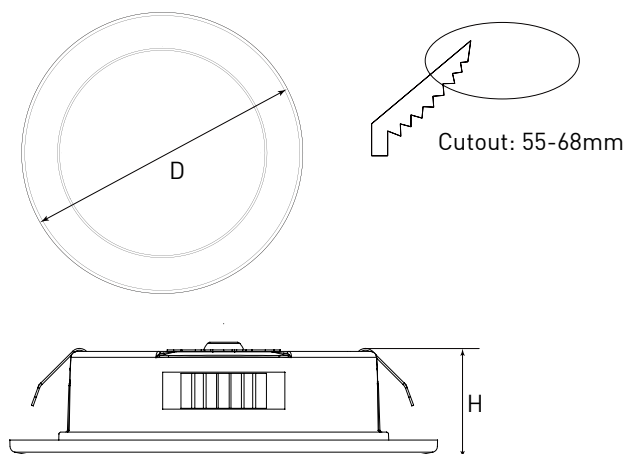

Color Changeable LED Reading Light

FINISH COLOUR




COLOUR TEMPERATURE



SPECIFICATIONS

Code	UB01
Wattage	3W
CCT(K)	3000-6500K+RGB
Lumens	200lm
Efficiency	70lm/W
CRI	> 80
Beam Angle	24°
Dimmable	Yes
Operating Temp.	-20°C -+45°C
Battery	3.7V 4000mAh
USB Charging	Type-C
Charging Time	4.5 hours
Duration Time	4.5 hours
Material	ABS+PC

DIMENSIONS

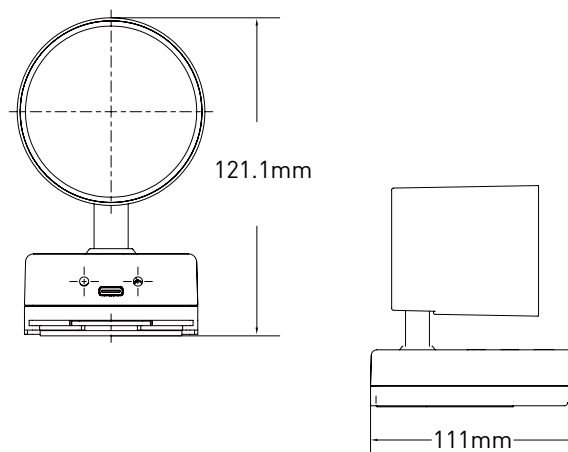

Wireless Side-Emitting Under Cabinet Bar Light

FINISH COLOUR





COLOUR TEMPERATURE



SPECIFICATIONS

Code	UB02-30	UB02-40	UB02-50
Wattage	1.5W	2W	3W
CCT(K)	3000-6500K		
Lumens	120lm	160lm	240lm
Efficiency	80lm/W		
CRI	> 80		
Dimmable	Yes		
Operating Temp.	-20°C -+45°C		
Battery	3.7V 1500mAh	3.7V 2000mAh	3.7V 3000mAh
USB Charging	Type-C		
Charging Time	3hours	4 hours	5 hours
Duration Time	6 hours		
Working Mode	AUTO/NIGHT/HAND WAVE/ON TIME		
Detection Angle	120°		
Sensor Duration Time	30s/60s/120s		
Human Body Detection Distance	0-4m		
Hand Scan Detection Distance	<10cm		
Lenth(L)	30cm	40cm	50cm
Material	ABS+PC		

DIMENSIONS

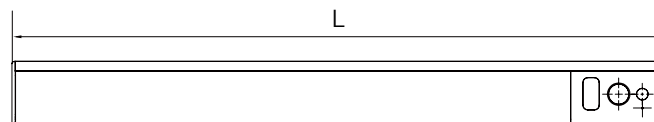

Side-Emitting Connectable Under Cabinet Bar Light

FINISH COLOUR




COLOUR TEMPERATURE



SPECIFICATIONS

Code	UB04-30	UB04-40	UB04-60
Wattage	5W	6.5W	10W
CCT(K)	3000-6500K		
Lumens	400lm	520lm	800lm
Efficiency	80lm/W		
CRI	> 80		
Dimmable	Yes		
Operating Temp.	-20°C --+45°C		
Input	220-240V~50/60Hz		
Output	24V DC		
Working Mode	AUTO/NIGHT/HAND WAVE/ON TIME		
Detection Angle	120°		
Sensor Duration Time	30s/60s/120s		
Human Body Detection Distance	0-4m		
Hand Scan Detection Distance	<10cm		
Lenth(L)	30cm	40cm	60cm
Material	ABS+PC		

DIMENSIONS

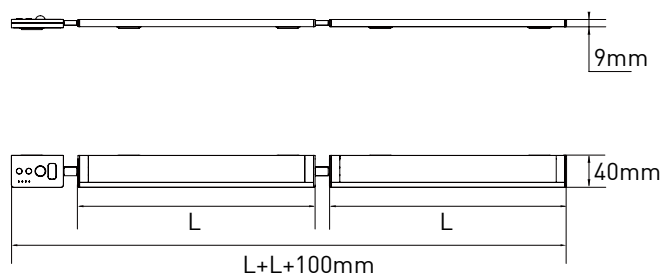

3CCT Square Wall Light

FINISH COLOUR





COLOUR TEMPERATURE



SPECIFICATIONS

Code	UB05
Wattage	4W
CCT(K)	3000K/4000K/6500K
Lumens	320lm
Efficiency	80lm/W
CRI	> 80
Beam Angle	0°-70°
Dimmable	Yes
Operating Temp.	-20°C ~+45°C
Battery	3.7V 4000mAh
USB Charging	Type-C
Charging Time	6 hours
Duration Time	6 hours
Working Mode	OFF/30s/60s/ON
Detection Angle	120°
Sensor Duration Time	30s/60s/5m
Human Body Detection Distance	0-4m
Hand Scan Detection Distance	<5cm
Material	ABS+PC




DIMENSIONS

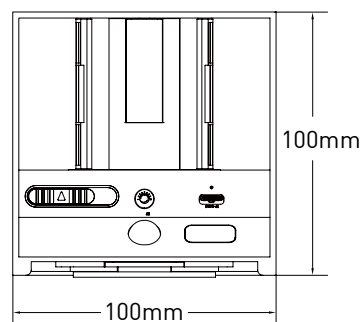

30° LED Solar Spike Light



SPECIFICATIONS

Code	OT-01A-2D3
Wattage	1.5W
CCT(K)	3000K/4000K/6500K
Lumens	120lm
Efficiency	80lm/W
CRI	> 80
Beam Angle	30°
Dimmable	Yes
Solar Panel	5.5VDC
Operating Temp.	-20°C ~+45°C
Battery	3.7V 1800mAh
Charging Time	8-10 hours by solar energy
USB Charging	3.5 hours by Type-C
Duration Time	6.5 hours
Working Mode	AUTO
Material	PC



SPECIFICATIONS



Code	OT-01A-2R3
Wattage	1.5W
CCT(K)	RGB
Lumens	120lm
Efficiency	80lm/W
CRI	> 80
Beam Angle	30°
Dimmable	Yes
Solar Panel	5.5VDC
Operating Temp.	-20°C ~+45°C
Battery	3.7V 1800mAh
Charging Time	8-10 hours by solar energy
USB Charging	3.5 hours by Type-C
Duration Time	6.5 hours
Working Mode	AUTO
Material	PC





90° LED Solar Spike Light with Sensor

SPECIFICATIONS

Code	OT-01B-2D3
Wattage	3W
CCT(K)	3000K/4000K/6500K
Lumens	240lm
Efficiency	80lm/W
CRI	> 80
Beam Angle	90°
Dimmable	Yes
Solar Panel	5.5VDC
Operating Temp.	-20°C ~+45°C
Battery	3.7V 1800mAh
Charging Time	8-10 hours by solar energy
USB Charging	3.5 hours by Type-C
Duration Time	4 hours
Working Mode	AUTO
Detection Angle	120°
Sensor Duration Time	30s
Detection Distance	0-4m
Material	PC



Code	OT-01B-2R3
Wattage	3W
CCT(K)	RGB
Lumens	240lm
Efficiency	80lm/W
CRI	> 80
Beam Angle	90°
Dimmable	Yes
Solar Panel	5.5VDC
Operating Temp.	-20°C ~+45°C
Battery	3.7V 1800mAh
Charging Time	8-10 hours by solar energy
USB Charging	3.5 hours by Type-C
Duration Time	4 hours
Working Mode	AUTO
Detection Angle	120°
Sensor Duration Time	30s
Detection Distance	0-4m
Material	PC



Colour Adjustable LED Solar Security Light

FINISH COLOUR





COLOUR TEMPERATURE



SPECIFICATIONS

Code	OT-04
Wattage	5W
CCT(K)	3000-6500K
Lumens	520lm
Efficiency	100lm/W
CRI	> 80
Dimmable	Yes
Beam Angle	100°
Operating Temp.	-20°C - +45°C
Solar Panel	5.5VDC
Battery	3.7V 1800mAh
Charging Time	8-10 hours by solar energy
USB Charging	3.5 hours by Type-C
Duration Time	60 mins
Worknig Mode	AUTO/D2D/ON TIME
Detection Angle	120°
Sensor Duration Time	30s/60s/120s
Detection Distance	6m max
Material	ABS+PC

DIMENSIONS

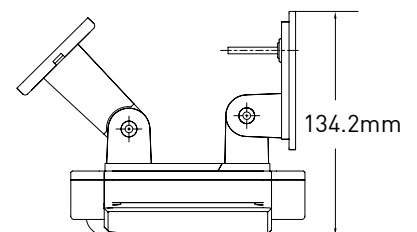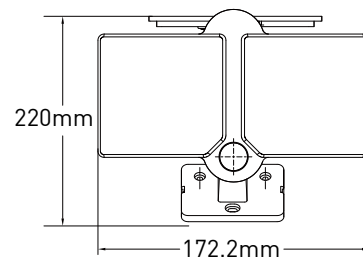

Colour Adjustable LED Solar Security Light

FINISH COLOUR




COLOUR TEMPERATURE



SPECIFICATIONS

Code	OT-05
Wattage	5W
CCT(K)	3000K/4000K/6500K
Lumens	400lm
Efficiency	80lm/W
CRI	> 80
Dimmable	No
Beam Angle	100°
Operating Temp.	-20°C ~+45°C
Solar Panel	5.5VDC
Battery	3.7V 1800mAh
Charging Time	8-10 hours by solar energy
USB Charging	3.5 hours by Type-C
Duration Time	80 mins
Detection Brightness	5-2000Lux
Detection Angle	120°
Sensor Duration Time	3secs-8mins
Detection Distance	10m max
Material	ABS+PC

DIMENSIONS

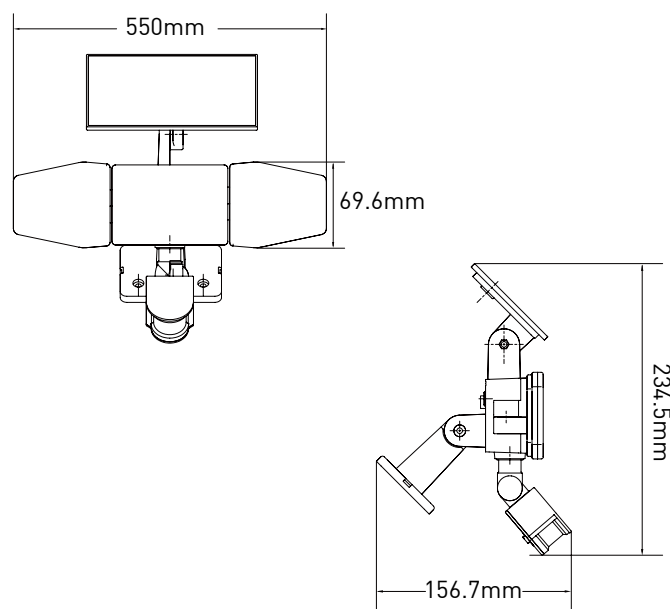

Wireless Surface-Emitting Under Cabinet Bar Light

FINISH COLOUR



COLOUR TEMPERATURE



SPECIFICATIONS

Code	UB03-30	UB03-40	UB03-60
Wattage	1.5W	2W	3W
CCT(K)	3000-6500K		
Lumens	120lm	160lm	240lm
Efficiency	80lm/W		
CRI	> 80		
Dimmable	Yes		
Operating Temp.	-20°C -+45°C		
Battery	3.7V 1500mAh	3.7V 2000mAh	3.7V 3000mAh
USB Charging	Type-C		
Charging Time	3 hours	4 hours	5 hours
Duration Time	6 hours		
Working Mode	AUTO/OFF/ONTIME		
Detection Angle	120°		
Sensor Duration Time	30s		
Human Body Detection Distance	0-4m		
Hand Scan Detection Distance	<10cm		
Lenth(L)	30cm	40cm	60cm
Material	ABS+PC		

DIMENSIONS

