



2025 CATALOGUE



DOWNLIGHT
Slim Colour Changeable
Dimmable LED Downlight



SECURITY LIGHT
Remote Control High Lumen
Output Security Light



CABINET LIGHT
Color Changeable LED
Reading Light



SMART DOWNLIGHT
Smart LED Downlight With
Interchangeable Beams



SOLAR LIGHT
LED Solar Spike Light



SMART SECURITY
High Lumen Output Outdoor
Smart Security Light



Factory Add: No.255 Yindong South Rd., Yinzhou Economic Development Zone,
Zhanqi Town, Ningbo City, Zhejiang, China.

Email: sales@silanglighting.com

Website: www.silanglighting.com

Tel: (+86)-574-55003160



e-Catalogue

Europe & Australia

COMPANY PROFILE



20000^{m²}
Plant area

200+
Workers

30 +
Export country

\$40 million
Annual output

Ningbo SILANG Lighting is a professional LED lighting manufacturer focused on designing, producing, and developing high-quality LED products. With years of experience, we help upgrade indoor and outdoor lighting with reliable downlights, floodlights, smart lights, and solar lights.

Based in Ningbo—just 30 minutes from Ningbo Port—we offer fast delivery and a strong supply chain. Our products are easy to use, innovative, and trusted by customers across Europe, Australia, New Zealand, and the US.

We continuously invest in R&D and work closely with our clients to bring new ideas to life. No matter what your project involves, we're here to provide lighting solutions that support your goals.





FACILITY

CERTIFICATION



OUR STRENGTH



Competitive Pricing & Quality Products: We design and produce professional LED lights in our own lab and factory, using self-developed drivers and advanced equipment. This allows us to offer high-quality lighting at reasonable prices with flexible order quantities.



Rigorous Quality Control: With over 10 years in LED lighting, we follow ISO9001 standards and meet CE, ETL, and RCM certifications. Our strict QC process includes incoming checks, assembly inspections, and pre-shipment full inspections upon request.



Stable & Fast Delivery: With 200+ skilled workers and 22 production lines, we output 600,000 pieces monthly. Being located just 30 minutes from Ningbo Port ensures smooth and efficient exports.



Strong R&D & Customization: Our dedicated R&D team launches 6+ new products each year. We also provide deep customization based on feedback from European, Australian, and American markets.




Global Production Bases: We operate factories in both China and Vietnam, which ensures stable supply and competitive cost advantages.

Downlight



Step Light



SV Series

Security Light



Commercial Light



TPLC

EU
AU



DOWNLIGHT


Code DL-SP25G-106D3
Wattage 6W
CCT(K) 3000K/4000K/6500K
Lumen 520lm
Beam Angle 38°/60°/110°
Dimmable Yes
Material PA+AL+PC
Height 25mm



25mm Ultra Slim Design
Meet various space requirements



Multiple Beam Angle
38°/60°/110° available



Separated LED Module
Easy to replace



SP series White Black Nickel
Slim Fixed/Tilted Led Downlight

SP Series	 New			 New	 CCT RGB
Code	DL-SP25F/G-106D3	DL-SP25F/G-106D3	DL-SP25B-F/G-106D3	DL-SP25D-F/G-108	DL-SP225F/G-106D5
Wattage	6W	6W	6W	4W/6W/8W	5.5W
Lumen	520lm	520lm	495lm	850lm	480lm
Beam Angle	38°	60°	110°	110°	60°
Cutout	68-75/75-78mm	68-75/75-78mm	68-75/75-78mm	60-70/68-75mm	68-75/75-78mm






DOWNLIGHT




DOWNLIGHT

Code DL-SP25-106D3
Wattage 6W
CCT(K) 3000K/4000K/6500K
Lumen 520lm
Beam Angle 38°/60°/110°
Dimmable Yes
Material PA+AL+PC
Height 25mm




Ultra-Flat Design

Aesthetically pleasing & easy to install



Multiple Beam Angle

38°/60°/110° available



GU10/MR16 Replacement

Φ50mm, ideal replacements for traditional bulbs



SP series White
3CCT Separated LED Module

Compatible with Multiple Frames



Code DL-SH230SAG-110D3
Wattage 10W
CCT(K) 3000K/4000K/5700K
Lumen 800lm
Beam Angle 60°
Dimmable Yes(Triac)
Material Nylon+AL+PC
Height 55mm



Anti-Glare Design

Eye protection




External Driver

Longer service life & more durable



Interchangeable Bezels

Wild applications



SH2 series White Black Nickel Chrome
Anti-Glare 3CCT Selectable LED Downlight

SHII Series							
Code	SH225-108D3	SH230-110D3	DL-SH230AG-110D3	DL-SH230SAG-110D3	SH225-108D5	SH230-110D5	
Wattage	8W	10W	10W	10W	8W	10W	
Lumen	640lm	900lm	800lm	800lm	600lm	750lm	
Beam Angle	110°		60°	60°	110°		
Cutout	70-80mm	90-100mm	90-100mm	90-100mm	70-80mm	90-100mm	
Height	35mm		35mm	55mm	35mm		





DOWNLIGHT




DOWNLIGHT

Code DL-SH330SAG-110D3
Wattage 10W
CCT(K) 3000K/4000K/5700K
Lumen 850lm
Beam Angle 60°
Dimmable Yes(Triac)
Material Nylon+AL+PC
Height 71mm



Anti-Glare Design

Eye protection




Light Source Selectable

SMD/COB light source available



Interchangeable Bezels

Wide applications



SH3 series




Deep Recessed 3CCT Selectable LED Downlight

SHIII Series				
Code	DL-SH330(C)-110D3	DL-SH330AG-110D3	DL-SH330SAG-110D3	DL-SH330-110D5
Wattage	10W	10W	10W	10W
Lumen	850lm	850lm	850lm	750lm
Beam Angle	110°	60°	60°	110°
Cutout	90-100mm	90-100mm	90-100mm	90-100mm
Height	50mm	50mm	71mm	50mm



Code DL-SF30-110D3
Wattage 10W
CCT(K) 3000K/4000K/5700K
Lumen 800lm
Beam Angle 110°
Dimmable Yes(Triac)
Material PA+PC
Height 32.4mm




32mm Slim Design

Save ceiling space



Upgraded DOB Plan

Choice of cost-effective



Energy Efficiency

Saving energy without brightness compromise



SF series



Color Adjustable Dimmable Slim LED Downlight

SF Series						
Code	DL-SF25-108D3	DL-SF25B-106D3	DL-SF30-110D3	DL-SF30B-108D3	DL-SF40-112D3	DL-SF30SAG-108D3
Wattage	8W	6W	10W	8W	12W	7.5W
Lumen	800lm	540lm	1000lm	720lm	1200lm	800lm
Beam Angle	110°	110°	110°	110°	110°	60°
Cutout	75-80mm	75-80mm	90-100mm	90-100mm	120-130mm	90-100mm
Height	32mm	40mm	32.4mm	40mm	32.4mm	59.9mm





DOWNLIGHT



DOWNLIGHT

Code DL-SQ325R-108LND3
Wattage 4W/6W/8W
CCT(K) 3000K/4000K/6500K
Lumen 400/600/800lm
Beam Angle 110°
Dimmable Yes(Triac)
Material PP+AL+PC
Height 29mm



3WT



3 Wattage Tunable

Switch the brightness you need



Super Thin Design

Suitable for slim ceiling void



Round/Square Selectable

Round & square face available




SQ series



Slim Colour Changeable Dimmable LED Downlight

Code DL-SQ525
Wattage 4W/6W/8W
CCT(K) 3000K/4000K/6500K
Lumen 400lm/600lm/800lm
Beam Angle 110°
Dimmable Yes(Triac)
Material PP+PC
Height 32.6mm

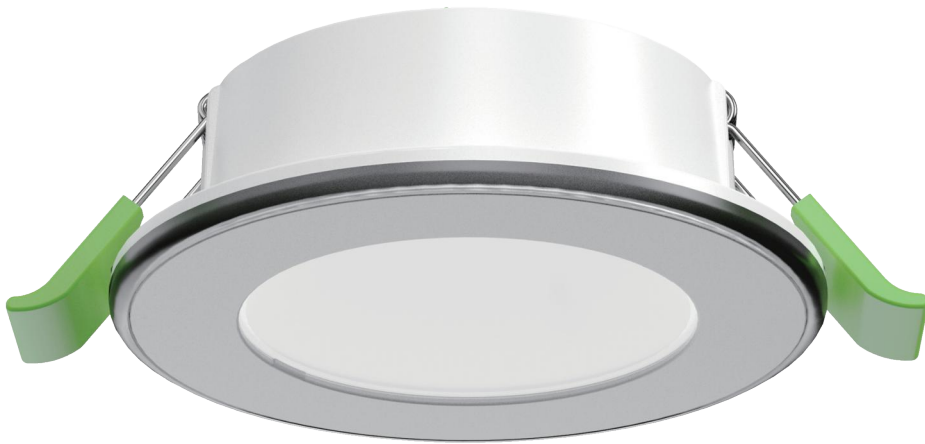

3 Wattage Tunable

Switch the brightness you need




Ultra-Slim Design

Suitable for narrow ceiling void



Nightlight Mode

Soft glow for cozy nighttime ambiance



New

SQ525 series



Ultra Slim 3WT LED Downlight With Nightlight

SQ Series					
Code	DL-SQ325R-108LND3	DL-SQ325A-108LND3	DL-SQ25R-107LND3	DL-SQ25S-107LND3	DL-SQ225-107D3W-3WT
Wattage	4W/6W/8W	4W/6W/8W	7W	7W	3W/5W/7W
Lumen	400/600/800lm	400/600/800lm	560lm	560lm	280/450/650lm
Beam Angle	110°	60°	110°	110°	120°
Cutout	68-78mm	68-78mm	66-75mm	66-75mm	66-75mm





DOWNLIGHT



DOWNLIGHT

Code DL-SS20-104LND3
Wattage 4W
CCT(K) 3000K/4000K/6500K
Lumen 320lm
Beam Angle 110°
Dimmable Yes(Triac)
Material PP+PS
Height 30mm



Super Thin Design

Suitable for Slim ceiling void




Multi-Size Selectable

From 2" to 8", 7 sizes available



Upgraded DOB Plan

Choice of cost-effective



SS series



Ultra Slim Colour Changeable LED Downlight


SS Series								
Code	DL-SS20-104LND3	DL-SS20S-104LND3	DL-SS23-105LND3	SL-SS25-105LND3	DL-SS30-107LND3	DL-SS40-110LND3	DL-SS60-115LND3	DL-SS80-122LND3
Wattage	4W	4W	5W	5W	7W	10W	15W	22W
Lumen	320lm	310lm	400lm	400lm	600lm	850lm	1300lm	1900lm
Beam Angle	110°	110°	110°	110°	110°	110°	110°	110°
Cutout	55-68mm	55-68mm	68-78mm	75-85mm	90-100mm	125-135mm	145-165mm	185-210mm
Height	30mm	30mm	30mm	31mm	31mm	31mm	32mm	32mm



SS | 3CCT Low Voltage Slim LED Downlight

SPECIFICATIONS


Code	DL-SS20N-504N3
Wattage	4W
CCT(K)	3000K/4000K/6500K
Lumen	400lm max
Input	AC 12V, DC 12-24V
Beam Angle	110°
Dimmable	No
Cutout	55-68mm
Height	30mm
Material	PP+PS



ST | 3CCT Low Voltage Ultra Slim LED Downlight

SPECIFICATIONS

Code	DL-ST20V-504N3
Wattage	3.5W
CCT(K)	3000K/4000K/6000K
Lumen	250lm
Input	AC 12V, DC 12-24V
Beam Angle	110°
Dimmable	No
Cutout	55-58mm
Height	18mm
Material	PC





DOWNLIGHT



DOWNLIGHT

SE | 6W 70mm Cutout IP54 Smart LED Downlight

SPECIFICATIONS

Code	DL-SE25-106D5	Beam Angle	110°
Wattage	6W	Dimmable	Yes
CCT(K)	3000K-6500K&RGB	Material	Nylon+Aluminum+PC
Lumen	570lm	Height	33mm



Cutout: 68-75mm



SA | Colour Changeable IP44 Dimmable LED Downlight

SPECIFICATIONS

Code	DL-SA330-110D3	Beam Angle	110°
Wattage	10W	Dimmable	Yes
CCT(K)	3000K/4000K/5700K	Material	Nylon+Aluminum+PC
Lumen	900lm	Height	56mm



Cutout: 90-100mm



YF | Colour Switchable LED Downlight With Isolated Dimmable Driver

SPECIFICATIONS

Code	YB25-109D3	YF30-112D3	YB40-115D3	Beam Angle	110°
Wattage	9W	12W	15W	Dimmable	Yes
CCT(K)	3000K/4000K/5700K	Material	Aluminum+PC		
Lumen	800lm	1100lm	1350lm	Height	40mm 40mm 45mm



9W Cutout: 70-75mm
12W Cutout: 90-100mm
15W Cutout: 120-130mm



SI | Colour Changeable LED Downlight Four Dimensions Available

SPECIFICATIONS

Code	SI225	SI230	SI235	SI240	Beam Angle	110°
Wattage	8W	10W	12W	14W	Dimmable	Yes
CCT(K)	3000K/4000K/5700K	Material	Nylon+Aluminum+PC			
Lumen	750lm	900lm	1100lm	1300lm	Height	50mm 57mm 60mm 65mm



8W Cutout: 70-80mm
10W Cutout: 90-100mm
12W Cutout: 105-120mm
14W Cutout: 120-130mm



SI | PIR Motion Sensor Colour Changeable LED Downlight

SPECIFICATIONS

Code	DL-SI230-110P3	Detection Range	120°
Wattage	10W	Detection Distance	5m max
CCT(K)	3000K/4000K/5700K	Detection Duration	1hr max
Lumen	800lm	Working Ambience	<50Lux
Beam Angle	110°	Height	65mm



Cutout: 90-100mm



SI | Colour Changeable LED light With Recessed Trim

SPECIFICATIONS

Code	DL-SI230R-110D3	Beam Angle	110°
Wattage	10W	Dimmable	Yes
CCT(K)	3000K/4000K/5700K	Material	Nylon+Aluminum+PC
Lumen	800lm	Height	65mm



Cutout: 90-100mm





STEP LIGHT



SECURITY LIGHT

Code DL-SV25R/S-102D3
Wattage 0.5W/1.5W/2.5W
CCT(K) 3000K/4000K/6500k
Lumen 180-220lm
Beam Angle 110°
Material PP+PC+SS
Height 66mm



3 Wattage Tunable
Switch the brightness you need

Shrapnel Buckle
Quick installation with one press

Wide Application
Light up any space wherever you need it



New **SV series** Round/Square 3WT LED Step Light



Code WL-YD3R-130P
Wattage 30W
CCT(K) 3000K/4000K/6500K
Lumen 2400lm
Beam Angle 90°/head
Detection Angle 120°
Detection Distance 10m max
Material PC+AL



Sensitive Motion Sensor
120° sensing angle, 10m max sensing range

Multiple Working Modes
AUTO/ON TIME modes available

Adjustable Heads
Wide illuminating area

YD3R series



Single/Double Headed 3CCT LED Security Light

YD3R series				
Code	WL-YD3R-130P	WL-YD3R-130	WL-YD3R-115P	WL-YD3R-115
Wattage	30W	30W	15W	15W
Lumen	2400lm	2400lm	1200lm	1200lm
Working Mode	Auto/On Time	On Time	Auto/On Time	On Time
Detection Range	120°/10m max	/	120°/10m max	/





SECURITY LIGHT



SECURITY LIGHT

Code WL-YD2R-130P(BK)
Wattage 34W
CCT(K) 3000K/4000K/6500K
Lumen 3200m
Beam Angle 90°/head
Detection Angle 150°
Detection Distance 12m max
Material PC



Sensitive Motion Sensor
120°-150°, 10-12m sensing range



Multiple Working Modes
AUTO/D2D/ON TIME modes available



Optional Control Methods
Remote/App control available



YDR(S) series
Colour Changing LED Security Light

YDR(S) Series						
Code	WL-YD2R-130P	WL-YDR-130P-D4	WL-YDR-130P-D5	WL-YDS-130P	WL-YDS-130P-D4	WL-YDS-130P-D5
Wattage	34W			30W		
Lumen	3200lm					
Working Mode	Auto On Time	Auto D2D On Time	Auto On Time	Auto On Time	Auto D2D On Time	Auto On Time



YC2R | Colour Changing LED Security Light

SPECIFICATIONS

Code	YC2R-030P
Wattage	30W
CCT(K)	3000K/4000K/5700K
Lumen	2700lm
Beam Angle	90°/head
Detection Angle	160°
Detection Brightness	5-2000Lux
Duration Time	7secs-10mins
Detection Distance	12m max
Manual Override	Yes
Material	Die-cast AL+PC+Glass



YB2R | PIR Motion Sensor LED Security Light

SPECIFICATIONS

Code	YB2R-020P
Wattage	20W
CCT(K)	3000K/4000K/6000K Optional
Lumen	1600lm
Beam Angle	90°/head
Detection Angle	160°
Detection Brightness	5-2000Lux
Duration Time	7secs-10mins
Detection Distance	12m max
Manual Override	Yes
Material	Die-cast AL+PC+Glass



YA2R | PIR Motion Sensor LED Security Light

SPECIFICATIONS

Code	YA2R-030P
Wattage	30W
CCT(K)	3000K/4000K/6000K Optional
Lumen	2700lm
Beam Angle	90°/head
Detection Angle	160°
Detection Brightness	5-2000Lux
Duration Time	7secs-10mins
Detection Distance	12m max
Manual Override	Yes
Material	Die-cast AL+PC+Glass



FLB | IP65 LED Flood Light with PIR Sensor

SPECIFICATIONS

Code	FLB-115P3	FLB-130P3	FLB-150P3
Wattage	15W	30W	50W
CCT(K)	3000K-6500K		
Lumen	1200lm	2400lm	4000lm
Beam Angle	100°		
Detection Angle	120°		
Detection Brightness	5-2000Lux		
Duration Time	3secs-8mins		
Detection Distance	10m max		
Material	Nylon/AL+Glass		



FLB | IP65 Remote Control LED Flood Light

SPECIFICATIONS

Code	FLB-115D4	FLB-130D4	FLB-150D4
Wattage	15W	30W	50W
CCT(K)	3000K-6500K		
Lumen	1200lm	2400lm	4000lm
Beam Angle	100°		
Detection Angle	120°		
Detection Brightness	5-2000Lux		
Duration Time	3secs-8mins		
Detection Distance	10m max		
Material	Nylon/AL+Glass		



FLB | Smart LED Flood Light

SPECIFICATIONS

Code	FLB-115D5	FLB-130D5	FLB-150D5
Wattage	15W	30W	50W
CCT(K)	3000K-6500K&RGB		
Lumen	1200lm	2400lm	4000lm
Beam Angle	100°		
Dimmable	Yes		
Material	Nylon/AL+Glass		





SHOP LIGHT


Code
Wattage
CCT(K)
Lumen
Beam Angle
Length
Material

TPLC-148N3-3WT
24W/36W/48W
3000K/4000K/6500K
2640lm/3960lm/5280lm
120°
1.2m
PC




3 Wattage Tunable

Switch the brightness you need



Interconnectable

Connect the lights for suitable length



Quick Connection Design

Easy to install and connect



TPLC series

White

LED Tri-Proof Light

TPLC Series				
Code	TPLC-124N3-3WT	TPLC-136N3-3WT	TPLC-148N3-3WT	TPLC-160N3-3WT
Wattage	12W/18W/24W	18W/28W/36W	24W/36W/48W	30W/48W/60W
Lumen	1320/1980/2640lm	1980/3080/3960lm	2640/3960/5280lm	3300/5280/6600lm
Length	0.6m	0.9m	1.2m	1.5m



Wall Light



UB01



UB05



JR20

Cabinet Light



UB02



UB02C



UB03



UB04



UB06

Solar Light



OT-01A



SR03



SAS113



OT-04



OT-05

Coming Soon...



SR260



SKA29

GLOBAL



WALL LIGHT




WALL LIGHT

Code UB01
Wattage 3W
CCT(K) 3000K/4000K/5000K/6000K+RGB
Lumen 200lm
Beam Angle 24°
Dimmable Yes
Material ABS
Battery 3.7V 4000mAh
USB Charging Type-C
Endurance Time 4.5h




Anti-Glare Design

Eye protection




Stretch Sheet Available

Make beam angle bigger



Adjustable Head

Flexible lighting angle



UB01 series

White

Color Changeable LED Reading Light



Code UB05 (Microwave)
Wattage 5W
CCT(K) 3000K/4000K/6000K
Lumen 320lm
Beam Angle 0°-70°
Dimmable Yes
Material ABS
Battery 3.7V 4000mAh
USB Charging Type-C
Endurance Time 4h
Detection Range 120°, 8m max (microwave)
20mm max (hand wave)




2 Working Modes

AUTO/HAND WAVE modes available



Beam Angle Adjustable

Customize the light beam you want



Installation Back Sheet

No pre-Installation required and easy to remove




UB05 series

White

Black

3CCT Square Wall Light

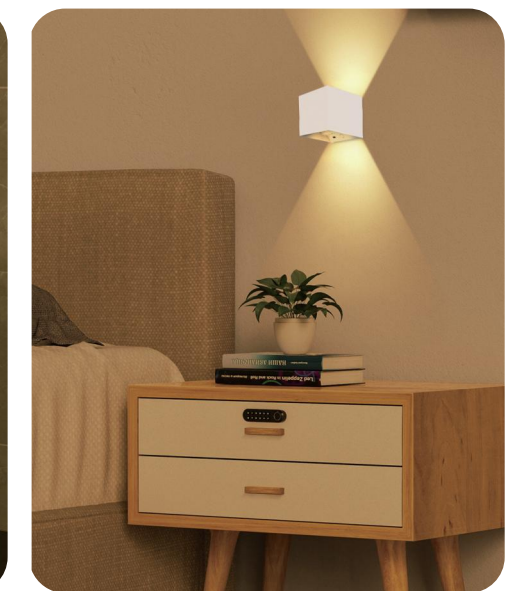



WALL LIGHT



CABINET LIGHT

Code JR20
Wattage 2W
CCT(K) 2700-6500K
Lumen 190lm
Beam Angle 60°
Dimmable Yes
Material ABS+AL
Battery 3.7V 4000mAh
USB Charging Type-C
Endurance Time 8h



Retractable & Rotatable
Adaptable to different painting sizes


2 Ways for Easy Installation
Magnetic install or rest atop artwork

Ultimate in Convenience
USB rechargeable & remote control




New **JR series** White Black

Wireless LED Art Light

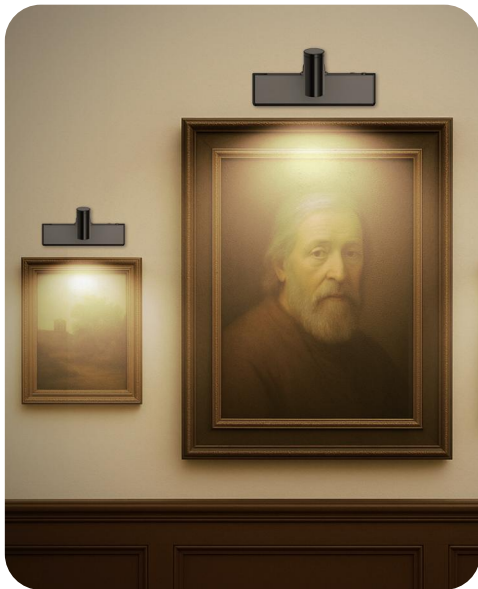

Code UB02-30
Wattage 1.5W
CCT(K) 3000K-6000K
Lumen 120lm
Beam Angle 120°
Dimmable Yes
Material ABS+PC
Length 30cm
Battery 3.7V 1500mAh
USB Charging Type-C
Endurance Time 6h
Detection Range 80°, <3m(PIR)
<10cm(handwave)



Motion/Wave Sensor
Wide applications in various space


Magnetic Adsorption
Easy to install and get recharged

4 Working Modes
DAY/NIGHT/HAND WAVE/
ON TIME modes available



UB02 series White Black Silver Gun

Wireless Side-Emitting Under Cabinet Bar Light


UB02 series		
Code	UB02-30	UB02-40
Wattage	1.5W	3.5W
Lumen	120lm	220lm
Input	3.7V 1500mAh(Battery)	220-240VAC~50-60Hz
Duration Time	6h	/
Lenth(L)	300mm	400mm





CABINET LIGHT

Code UB02-C
Wattage 2.3W
CCT(K) 3000-6500K
Lumen 200lm
Dimmable Yes
Material ABS
Lenth 300mm
Battery 3.7V 1500mAh
USB Charging Type-C
Endurance Time 4h

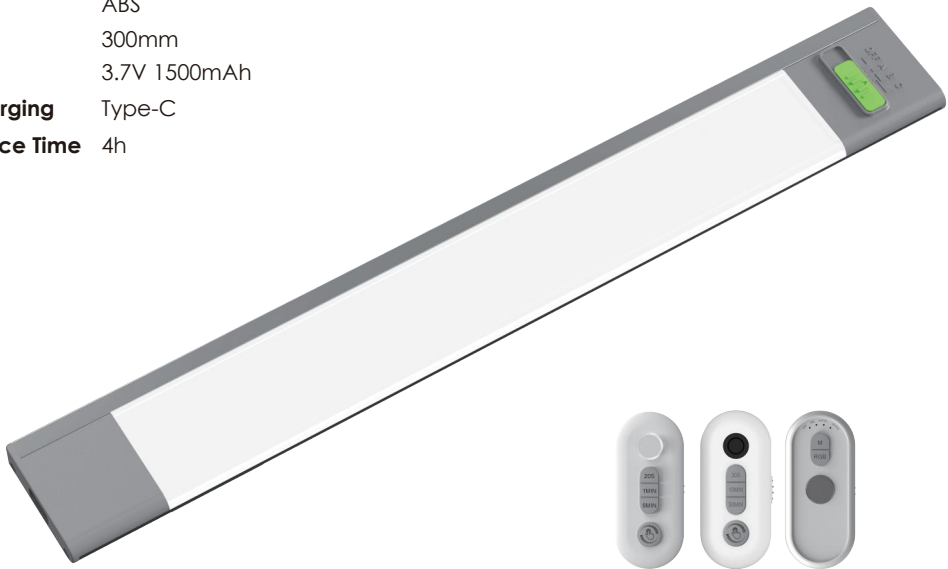

Wireless Connectable

Convenient group control via remote control



2 Trigger Modes

Motion/ Handwave sensor activated



Magnetic Adsorption

Easy to install and get recharged



New UB02C series White

Wireless Connectable Under Cabinet Bar Light



CABINET LIGHT

Code UB06R
Wattage 2W
CCT(K) 3000K/4000K/6000K+RGB
Lumen 160-180lm
Beam Angle 45°/110°
Dimmable Yes
Material ABS
Diameter 85mm
Battery 3.7V 2000mAh
USB Charging Type-C
Endurance Time 6h



Wireless Connectable

Convenient group control via remote control



2 Beam Angles Available

Choose the one more suitable



2 Trigger Modes

Motion/ Handwave sensor activated



UB06 series White

Wireless Connectable LED Cabinet Light





CABINET LIGHT



SOLAR LIGHT

UB | Wireless Surface-Emitting Under Cabinet Bar Light

SPECIFICATIONS


Code	UB03-30	UB03-40	UB03-60
Wattage	1.5W	2W	3W
CCT(K)	3000-6500K		
Lumen	120lm	160lm	240lm
Dimmable	Yes		
Battery	3.7V 1500mAh	3.7V 2000mAh	3.7V 3000mAh
USB Charging	Type-C		
Charging Time	3 hours	4 hours	5 hours
Endurance Time	6 hours		
Working Mode	AUTO/OFF/ON TIME		
Detection Angle	120°		
Sensor Duration Time	30s		
Human Body Detection Distance	0-4m		
Length(L)	30cm	40cm	60cm
Material	ABS+PC		



UB | Side-Emitting Connectable Under Cabinet Bar Light

SPECIFICATIONS

Code	UB04-30	UB04-40	UB04-60
Wattage	5W	6.5W	10W
CCT(K)	3000K-6500K		
Lumen	400lm	520lm	800lm
Dimmable	Yes		
Input	220-240V~50/60Hz		
Output	24V DC		
Working Mode	AUTO/NIGHT/HAND WAVE/ON TIME		
Detection Angle	120°		
Sensor Duration Time	30s/60s/120s		
Human Body Detection Distance	0-4m		
Hand Scan Detection Distance	<10cm		
Length(L)	30cm	40cm	60cm
Material	ABS+PC		

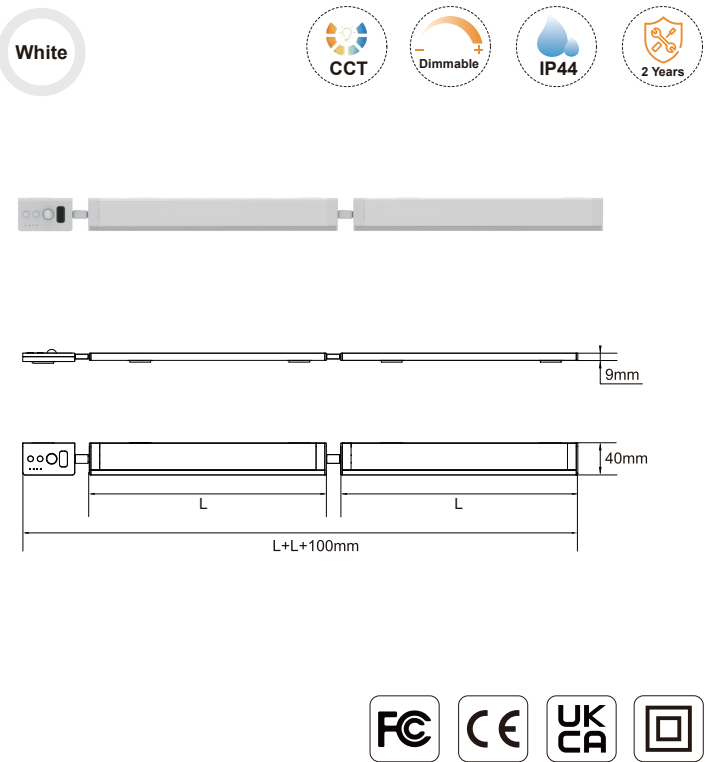

Code	OT-01A-4P3
Wattage	4W
CCT(K)	3000K/4000/6500K
Lumen	180lm
Beam Angle	30°
Dimmable	Yes
Material	ABS+PC
Height	42.6cm
Solar Panel	5.5VDC
Battery	3.7V1800mAh
USB Charging	Type-C
Endurance Time	2.5h
Detection Angle	120°



Adjustable Solar Panel
Efficient solar powered
& save energy



Sensitive Motion Sensor
Sensitive Motion Sensor



Adjustable Head
Illuminate specific items
you need



OT-01 series

30°/120° LED Solar Spike Light

OT series						
Code	OT-01A-1D3	OT-01A-1R	OT-01A-4P3	OT-01B-1D3	OT-01B-1R	OT-01B-4P3
Wattage	2W	1.2W	4W	1.2W	1.2W	4W
Lumen	100lm	60-80lm	180lm	60-80lm	60-80lm	180lm
Illumination	240Lux/1m	240Lux/1m	750Lux/1m	240Lux/1m	240Lux/1m	750Lux
Beam Angle	30°	30°	30°	120°	120°	120°
Detection Angle	/	/	120°	/	/	120°
Endurance Time	8-10h	8-10h	2.5h	8-10h	8-10h	2.5h





Code	PL-SR03
Wattage	1.2W
CCT(K)	3000K/4000/6500K
Lumen	75lm
Dimmable	Yes
Material	ABS+PC
Solar Panel	5VDC
Battery	3.7V 1500mAh
USB Charging	Type-C
Endurance Time	12h
Detection Range	240°,10m max




Wireless Connectable
Convenient group control



Separated Motion Sensor
Solar-charged sensor & more flexible sensing distances



4 Working Modes
DAY/NIGHT/D2D/ON TIME modes available



SR/SAS series



LED Solar Patio Light




SR/SAS series		
Code	PL-SR03	PL-SAS113
Wattage	1.2W	1.6W
Lumen	75lm	140lm
CCT(K)	3000K/4000K/6500K	3000K/4000K/6500K
Height	620mm	755mm
Detection Range	240°,10m max	240°,10m max
Endurance Time	12h	12h



OT | Colour Adjustable LED Solar Security Light

SPECIFICATIONS



Code	OT-04
Wattage	5W
CCT(K)	3000K-6500K
Lumen	400lm max
Dimmable	Yes
Beam Angle	100°
Solar Panel	5.5VDC
Battery	3.7V 1800mAh
Charging Time	8-10 hours by solar energy
USB Charging	3.5 hours by Type-C
Endurance Time	2 hours
Worknig Mode	AUTO/D2D/ON TIME
Detection Angle	120°
Sensor Duration Time	30s/60s/120s
Detection Distance	9m max
Material	ABS+PC



OT | Colour Adjustable LED Solar Security Light

SPECIFICATIONS

Code	OT-05
Wattage	5W
CCT(K)	3000K/4000K/6500K
Lumen	400lm
Dimmable	No
Beam Angle	100°
Solar Panel	5.5VDC
Battery	3.7V 1800mAh
Charging Time	8-10 hours by solar energy
USB Charging	3.5 hours by Type-C
Endurance Time	2 hours
Detection Brightness	5-2000Lux
Detection Angle	120°
Sensor Duration Time	3secs-8mins
Detection Distance	16m max
Material	ABS+PC



Coming Soon...

SR260 Wall Light

- ★ Bidirectional Lighting
- ★ Rotatable Head



SKA29 Ceiling Light



- 3WT+3CCT ★
- Multiple Trims Available ★
- Dual-Sided Emitting ★
- Remote Control ★