



2026 CATALOGUE



DOWNLIGHT
Slim Colour Changeable
Dimmable LED Downlight



SECURITY LIGHT
Remote Control High Lumen
Output Security Light



CABINET LIGHT
Color Changeable LED
Reading Light



SMART DOWNLIGHT
Smart LED Downlight With
Interchangeable Beams



SOLAR LIGHT
LED Solar Spike Light



SMART SECURITY
High Lumen Output Outdoor
Smart Security Light



Factory Add: No.255 Yindong South Rd., Yinzhou Economic Development Zone,
Zhanqi Town, Ningbo City, Zhejiang, China.

Email: sales@silanglighting.com

Website: www.silanglighting.com

Tel: (+86)-574-55003160



e-Catalogue

Europe & Australia

COMPANY PROFILE



20000^{m²}
Plant area

200+
Workers

30 +
Export country

\$40 million
Annual output

Ningbo SILANG Lighting is a professional LED lighting manufacturer focused on designing, producing, and developing high-quality LED products. With years of experience, we help upgrade indoor and outdoor lighting with reliable downlights, floodlights, smart lights, and solar lights.

Based in Ningbo—just 30 minutes from Ningbo Port—we offer fast delivery and a strong supply chain. Our products are easy to use, innovative, and trusted by customers across Europe, Australia, New Zealand, and the US.

We continuously invest in R&D and work closely with our clients to bring new ideas to life. No matter what your project involves, we're here to provide lighting solutions that support your goals.





FACILITY

CERTIFICATION




OUR STRENGTH

- 
Competitive Pricing & Quality Products: We design and produce professional LED lights in our own lab and factory, using self-developed drivers and advanced equipment. This allows us to offer high-quality lighting at reasonable prices with flexible order quantities.
- 
Rigorous Quality Control: With over 10 years in LED lighting, we follow ISO9001 standards and meet CE, ETL, and RCM certifications. Our strict QC process includes incoming checks, assembly inspections, and pre-shipment full inspections upon request.
- 
Stable & Fast Delivery: With 200+ skilled workers and 22 production lines, we output 600,000 pieces monthly. Being located just 30 minutes from Ningbo Port ensures smooth and efficient exports.
- 
Strong R&D & Customization: Our dedicated R&D team launches 6+ new products each year. We also provide deep customization based on feedback from European, Australian, and American markets.
- 
Global Production Bases: We operate factories in both China and Vietnam, which ensures stable supply and competitive cost advantages.

Downlight



Step Light



SV Series

Security Light



YD3R Series

YDR Series

YDS Series

FLB Series

Commercial Light



TPLC

Comming Soon.....



SKA29

CS Series




DOWNLIGHT

Code DL-CS20-104D3
Wattage 4W
CCT(K) 3000K/ 4000K/ 6500K
Lumen 400lm
Beam Angle 110°
Dimmable Yes(Triac)
Material Iron+PP+PS
Height 29mm



Metal Fitting

White powder coated finish For a long lifespan




IC Insulation Coverable

Save energy and enhance overall safety



Rubber Seal Ring

Reduce air infiltration and save energy



New

CS series



METAL 3CCT+DIM Downlight

CS Series					
Code	DL-CS20-104D3	DL-CS23-105D3	DL-CS25-106D3	DL-CS30-108D3	DL-CS40-110D3
Wattage	4W	5W	6W	8W	10W
Lumen	400lm	550lm	665lm	890lm	1120lm
Beam Angle	110°	110°	110°	110°	110°
Cutout	55-68mm	68-75mm	75-85mm	90-100mm	125-135mm
Height	29mm	28mm	28mm	28mm	28mm





DOWNLIGHT



DOWNLIGHT

Code DL-SP25G-106D3
Wattage 6W
CCT(K) 3000K/4000K/6500K
Lumen 520lm
Beam Angle 38°/60°/110°
Dimmable Yes
Material PA+AL+PC
Height 25mm




25mm Ultra Slim Design

Meet various space requirements



Multiple Beam Angle

38°/60°/110° available




Separated LED Module

Easy to replace



SP series White Black Nickel

Slim Fixed/Tilted Led Downlight

SP Series					
Code	DL-SP25F/G-106D3	DL-SP25F/G-106D3	DL-SP25B-F/G-106D3	DL-SP25D-F/G-108	DL-SP225F/G-106D5
Wattage	6W	6W	6W	4W/6W/8W	5.5W
Lumen	520lm	520lm	495lm	850lm	480lm
Beam Angle	38°	60°	110°	110°	60°
Cutout	68-75/75-78mm	68-75/75-78mm	68-75/75-78mm	60-70/68-75mm	68-75/75-78mm




Code DL-SP25-106D3
Wattage 6W
CCT(K) 3000K/4000K/6500K
Lumen 520lm
Beam Angle 38°/60°/110°
Dimmable Yes
Material PA+AL+PC
Height 25mm




Ultra-Flat Design

Aesthetically pleasing & easy to install



Multiple Beam Angle

38°/60°/110° available



GU10/MR16 Replacement

Φ50mm, ideal replacements for traditional bulbs



SP series White

3CCT Separated LED Module

Compatible with Multiple Frames





DOWNLIGHT



DOWNLIGHT

Code DL-SH230SAG-110D3
Wattage 10W
CCT(K) 3000K/4000K/5700K
Lumen 800lm
Beam Angle 60°
Dimmable Yes(Triac)
Material Nylon+AL+PC
Height 55mm




Anti-Glare Design
Eye protection



External Driver
Longer service life & more durable



Interchangeable Bezels
Wild applications



SH2 series




Anti-Glare 3CCT Selectable LED Downlight

SHII Series							
Code	SH225-108D3	SH230-110D3	DL-SH230AG-110D3	DL-SH230SAG-110D3	SH225-108D5	SH230-110D5	
Wattage	8W	10W	10W	10W	8W	10W	
Lumen	640lm	900lm	800lm	800lm	600lm	750lm	
Beam Angle	110°		60°	60°	110°		
Cutout	70-80mm	90-100mm	90-100mm	90-100mm	70-80mm	90-100mm	
Height	35mm		35mm	55mm	35mm		



Code DL-SH330SAG-110D3
Wattage 10W
CCT(K) 3000K/4000K/5700K
Lumen 850lm
Beam Angle 60°
Dimmable Yes(Triac)
Material Nylon+AL+PC
Height 71mm




Anti-Glare Design
Eye protection



Light Source Selectable
SMD/COB light source available



Interchangeable Bezels
Wild applications



SH3 series



Deep Recessed 3CCT Selectable LED Downlight

SHIII Series				
Code	DL-SH330(C)-110D3	DL-SH330AG-110D3	DL-SH330SAG-110D3	DL-SH330-110D5
Wattage	10W	10W	10W	10W
Lumen	850lm	850lm	850lm	750lm
Beam Angle	110°	60°	60°	110°
Cutout	90-100mm	90-100mm	90-100mm	90-100mm
Height	50mm	50mm	71mm	50mm





DOWNLIGHT



DOWNLIGHT

Code DL-SF30-110D3
Wattage 10W
CCT(K) 3000K/4000K/5700K
Lumen 800lm
Beam Angle 110°
Dimmable Yes(Triac)
Material PA+PC
Height 32.4mm



32mm Slim Design
Save ceiling space

Upgraded DOB Plan
Choice of cost-effective

Energy Efficiency
Saving energy without brightness compromise



SF series



Color Adjustable Dimmable Slim LED Downlight

Code DL-SQ325R-108LND3
Wattage 4W/6W/8W
CCT(K) 3000K/4000K/6500K
Lumen 400/600/800lm
Beam Angle 110°
Dimmable Yes(Triac)
Material PP+AL+PC
Height 29mm



3 Wattage Tunable
Switch the brightness you need

Super Thin Design
Suitable for slim ceiling void

Round/Square Selectable
Round & square face available



SQ series



Slim Colour Changeable Dimmable LED Downlight

SF Series						
Code	DL-SF25-108D3	DL-SF25B-106D3	DL-SF30-110D3	DL-SF30B-108D3	DL-SF40-112D3	DL-SF30SAG-108D3
Wattage	8W	6W	10W	8W	12W	7.5W
Lumen	800lm	540lm	1000lm	720lm	1200lm	800lm
Beam Angle	110°	110°	110°	110°	110°	60°
Cutout	75-80mm	75-80mm	90-100mm	90-100mm	120-130mm	90-100mm
Height	32mm	40mm	32.4mm	40mm	32.4mm	59.9mm



SQ Series					
Code	DL-SQ325R-108LND3	DL-SQ325A-108LND3	DL-SQ25R-107LND3	DL-SQ25S-107LND3	DL-SQ225-107D3W-3WT
Wattage	4W/6W/8W	4W/6W/8W	7W	7W	3W/5W/7W
Lumen	400/600/800lm	400/600/800lm	560lm	560lm	280/450/650lm
Beam Angle	110°	60°	110°	110°	120°
Cutout	68-78mm	68-78mm	66-75mm	66-75mm	66-75mm






DOWNLIGHT



DOWNLIGHT

Code DL-SQ623-107D3
Wattage 7W
CCT(K) 3000K/ 4000K/ 6500K
Lumen 600lm
Beam Angle 110°
Dimmable Yes(Triac)
Material PP+AL+PC
Height 30mm



New
SQ6 series White


Slim Colour Changeable Dimmable LED Downlight



IC Rated
Safe when fully covered
by insulation



**Plastic-Coated
Aluminum Fitting**
Efficient heat dissipation




Multi-Size Available
Find your perfect match

Code DL-SQ525
Wattage 4W/6W/8W
CCT(K) 3000K/4000K/6500K
Lumen 400lm/600lm/800lm
Beam Angle 110°
Dimmable Yes(Triac)
Material PP+PC
Height 32.6mm



New
SQ525 series White


Ultra Slim 3WT LED Downlight With Nightlight



3 Wattage Tunable
Switch the brightness
you need



Ultra-Slim Design
Suitable for narrow
ceiling void



Nightlight Mode
Soft glow for cozy
nighttime ambiance

SQ6 Series			
Code	DL-SQ623-107D3	DL-SQ625-108D3	DL-SQ630-110D3
Wattage	7W	8W	10W
Lumen	600lm	800lm	1000lm
Beam Angle	110°	110°	110°
Cutout	68-78mm	75-85mm	90-100mm
Height	30mm	29mm	29mm





DOWNLIGHT



DOWNLIGHT

Code DL-SS20-104LND3
Wattage 4W
CCT(K) 3000K/4000K/6500K
Lumen 320lm
Beam Angle 110°
Dimmable Yes(Triac)
Material PP+PS
Height 30mm



Super Thin Design

Suitable for Slim ceiling void




Multi-Size Selectable

From 2" to 8", 7 sizes available



Upgraded DOB Plan

Choice of cost-effective



SS series White Black Nickel

Ultra Slim Colour Changeable LED Downlight

SS Series								
Code	DL-SS20-104LND3	DL-SS20S-104LND3	DL-SS23-105LND3	SL-SS25-105LND3	DL-SS30-107LND3	DL-SS40-110LND3	DL-SS60-115LND3	DL-SS80-122LND3
Wattage	4W	4W	5W	5W	7W	10W	15W	22W
Lumen	320lm	310lm	400lm	400lm	600lm	850lm	1300lm	1900lm
Beam Angle	110°	110°	110°	110°	110°	110°	110°	110°
Cutout	55-68mm	55-68mm	68-78mm	75-85mm	90-100mm	125-135mm	145-165mm	185-210mm
Height	30mm	30mm	30mm	31mm	31mm	31mm	32mm	32mm



Code DL-SJ20-104L3
Wattage 4W
CCT(K) 3000K/4000K/6500K
Lumen 340lm
Beam Angle 100°
Dimmable No
Material PP+PS
Height 31mm



Multi-Size Available

Find your perfect match



Slim Design

Suitable for narrow ceiling void



IP44 Waterproof

Suitable for damp areas



New
SJ series White

Ultra Slim Colour Changeable LED Downlight

SJ Series					
Code	DL-SJ20-104L3	DL-SJ23-105L3	DL-SJ25-105L3	DL-SJ30-107L3	DL-SJ40-110L3
Wattage	4W	5W	5W	7W	10W
Lumen	340lm	450lm	450lm	630lm	900lm
Beam Angle	100°	100°	100°	100°	100°
Cutout	55-68mm	68-75mm	75-85mm	90-100mm	125-135mm
Height	31mm	31mm	31mm	31mm	31mm





DOWNLIGHT



DOWNLIGHT

SS | 3CCT Low Voltage Slim LED Downlight

SPECIFICATIONS

Code	DL-SS20N-504N3	DL-SS23N-505N3
Wattage	4W	5W
CCT(K)	3000K/4000K/6500K	
Lumen	400lm max	540lm max
Input	AC 12V, DC 12-24V	
Beam Angle	110°	
Dimmable	No	
Cutout	55-68mm	68-78mm
Dimension(DXH)	78X30mm	85X29mm
Material	PP+PS	



ST | 3CCT Low Voltage Ultra Slim LED Downlight

SPECIFICATIONS

Code	DL-ST20V-504N3
Wattage	3.5W
CCT(K)	3000K/4000K/6000K
Lumen	250lm
Input	AC 12V, DC 12-24V
Beam Angle	110°
Dimmable	No
Cutout	55-58mm
Height	18mm
Material	PC



SE | 6W 70mm Cutout IP54 Smart LED Downlight

SPECIFICATIONS

Code	DL-SE25-106D5	Beam Angle	110°
Wattage	6W	Dimmable	Yes
CCT(K)	3000K-6500K&RGB	Material	Nylon+Aluminum+PC
Lumen	570lm	Height	33mm



SA | Colour Changeable IP44 Dimmable LED Downlight

SPECIFICATIONS

Code	DL-SA330-110D3	Beam Angle	110°
Wattage	10W	Dimmable	Yes
CCT(K)	3000K/4000K/5700K	Material	Nylon+Aluminum+PC
Lumen	900lm	Height	56mm



YF | Colour Switchable LED Downlight With Isolated Dimmable Driver

SPECIFICATIONS

Code	YB25-109D3	YF30-112D3	YB40-115D3	Beam Angle	110°
Wattage	9W	12W	15W	Dimmable	Yes
CCT(K)	3000K/4000K/5700K			Material	Aluminum+PC
Lumen	800lm	1100lm	1350lm	Height	40mm 40mm 45mm





DOWNLIGHT




STEP LIGHT

SI | Colour Changeable LED Downlight Four Dimensions Available

SPECIFICATIONS


Code	SI225	SI230	SI235	SI240	Beam Angle	110°
Wattage	8W	10W	12W	14W	Dimmable	Yes
CCT(K)	3000K/4000K/5700K				Material	Nylon+Aluminum+PC
Lumen	750lm	900lm	1100lm	1300lm	Height	50mm 57mm 60mm 65mm

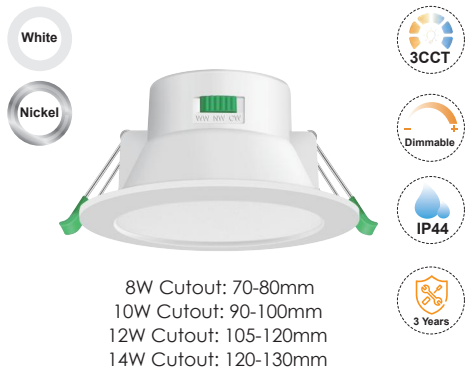

Code	DL-SV25R/S-102D3
Wattage	0.5W/1.5W/2.5W
CCT(K)	3000K/4000K/6500k
Lumen	180-220lm
Beam Angle	110°
Material	PP+PC+SS
Height	66mm




3 Wattage Tunable
Switch the brightness you need



Shrapnel Buckle
Quick installation with one press



Wide Application
Light up any space wherever you need it



New **SV series** Round/Square 3WT LED Step Light



SI | PIR Motion Sensor Colour Changeable LED Downlight

SPECIFICATIONS


Code	DL-SI230-110P3	Detection Range	120°
Wattage	10W	Detection Distance	5m max
CCT(K)	3000K/4000K/5700K	Detection Duration	1hr max
Lumen	800lm	Working Ambience	<50Lux
Beam Angle	110°	Height	65mm



SI | Colour Changeable LED light With Recessed Trim

SPECIFICATIONS

Code	DL-SI230R-110D3	Beam Angle	110°
Wattage	10W	Dimmable	Yes
CCT(K)	3000K/4000K/5700K	Material	Nylon+Aluminum+PC
Lumen	800lm	Height	65mm

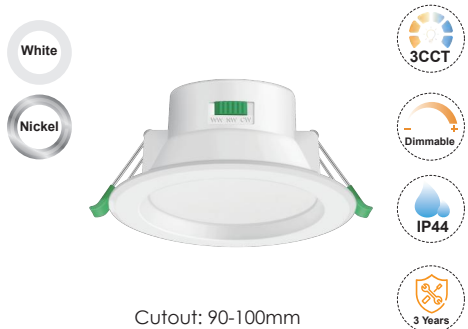




SECURITY LIGHT

Code WL-YD3R-130P
Wattage 30W
CCT(K) 3000K/4000K/6500K
Lumen 2400lm
Beam Angle 90°/head
Detection Angle 120°
Detection Distance 10m max
Material PC+AL



Sensitive Motion Sensor
120° sensing angle, 10m max sensing range



Multiple Working Modes
AUTO/ON TIME modes available



Adjustable Heads
Wide illuminating area



YD3R series White Black

Single/Double Headed 3CCT LED Security Light



YD3R series				
Code	WL-YD3R-130P	WL-YD3R-130	WL-YD3R-115P	WL-YD3R-115
Wattage	30W	30W	15W	15W
Lumen	2400lm	2400lm	1200lm	1200lm
Working Mode	Auto/On Time	On Time	Auto/On Time	On Time
Detection Range	120°/10m max	/	120°/10m max	/



SECURITY LIGHT

Code WL-YD2R-130P(BK)
Wattage 34W
CCT(K) 3000K/4000K/6500K
Lumen 3200m
Beam Angle 90°/head
Detection Angle 150°
Detection Distance 12m max
Material PC




Sensitive Motion Sensor
120°-150°, 10-12m sensing range



Multiple Working Modes
AUTO/D2D/ON TIME modes available



Optional Control Methods
Remote/App control available



YDR(S) series White Black

Colour Changing LED Security Light



YDR(S) Series						
Code	WL-YD2R-130P	WL-YDR-130P-D4	WL-YDR-130P-D5	WL-YDS-130P	WL-YDS-130P-D4	WL-YDS-130P-D5
Wattage	34W			30W		
Lumen	3200lm					
Working Mode	Auto On Time	Auto D2D On Time	Auto On Time	Auto On Time	Auto D2D On Time	Auto On Time





SECURITY LIGHT



SHOP LIGHT

YC2R | Colour Changing LED Security Light

SPECIFICATIONS

Code	YC2R-030P
Wattage	30W
CCT(K)	3000K/4000K/5700K
Lumen	2700lm
Beam Angle	90°/head
Detection Angle	160°
Detection Brightness	5-2000Lux
Duration Time	7secs-10mins
Detection Distance	12m max
Manual Override	Yes
Material	Die-cast AL+PC+Glass



YB2R | PIR Motion Sensor LED Security Light

SPECIFICATIONS

Code	YB2R-020P
Wattage	20W
CCT(K)	3000K/4000K/6000K Optional
Lumen	1600lm
Beam Angle	90°/head
Detection Angle	160°
Detection Brightness	5-2000Lux
Duration Time	7secs-10mins
Detection Distance	12m max
Manual Override	Yes
Material	Die-cast AL+PC+Glass



YA2R | PIR Motion Sensor LED Security Light

SPECIFICATIONS

Code	YA2R-030P
Wattage	30W
CCT(K)	3000K/4000K/6000K Optional
Lumen	2700lm
Beam Angle	90°/head
Detection Angle	160°
Detection Brightness	5-2000Lux
Duration Time	7secs-10mins
Detection Distance	12m max
Manual Override	Yes
Material	Die-cast AL+PC+Glass



FLB | IP65 LED Flood Light with PIR Sensor

SPECIFICATIONS

Code	FLB-115P3	FLB-130P3	FLB-150P3
Wattage	15W	30W	50W
CCT(K)	3000K-6500K		
Lumen	1200lm	2400lm	4000lm
Beam Angle	100°		
Detection Angle	120°		
Detection Brightness	5-2000Lux		
Duration Time	3secs-8mins		
Detection Distance	10m max		
Material	Nylon/AL+Glass		



FLB | IP65 Remote Control LED Flood Light

SPECIFICATIONS

Code	FLB-115D4	FLB-130D4	FLB-150D4
Wattage	15W	30W	50W
CCT(K)	3000K-6500K		
Lumen	1200lm	2400lm	4000lm
Beam Angle	100°		
Detection Angle	120°		
Detection Brightness	5-2000Lux		
Duration Time	3secs-8mins		
Detection Distance	10m max		
Material	Nylon/AL+Glass		



FLB | Smart LED Flood Light

SPECIFICATIONS

Code	FLB-115D5	FLB-130D5	FLB-150D5
Wattage	15W	30W	50W
CCT(K)	3000K-6500K&RGB		
Lumen	1200lm	2400lm	4000lm
Beam Angle	100°		
Dimmable	Yes		
Material	Nylon/AL+Glass		



Code	TPLC-148N3-3WT
Wattage	24W/36W/48W
CCT(K)	3000K/4000K/6500K
Lumen	2640lm/3960lm/5280lm
Beam Angle	120°
Length	1.2m
Material	PC




TPLC series



LED Tri-Proof Light


3 Wattage Tunable

Switch the brightness you need




Interconnectable

Connect the lights for suitable length



Quick Connection Design

Easy to install and connect



TPLC Series				
Code	TPLC-124N3-3WT	TPLC-136N3-3WT	TPLC-148N3-3WT	TPLC-160N3-3WT
Wattage	12W/18W/24W	18W/28W/36W	24W/36W/48W	30W/48W/60W
Lumen	1320/1980/2640lm	1980/3080/3960lm	2640/3960/5280lm	3300/5280/6600lm
Length	0.6m	0.9m	1.2m	1.5m



Coming Soon...

SKA29 Ceiling Light

- ★ 3WT+3CCT
- ★ Multiple Trims Available
- ★ Dual-Sided Emitting
- ★ Remote Control



CS Square Shape Series

Available in 2.0", 2.3", 2.5", 3", 4", 6", and 8" sizes ★

Spray-coated white, black and satin nickel finish optional ★

3 cm installation height ★

IC insulation coverable ★

3CCT & Dimmable ★


Energy Efficiency Class E ★



Coming Soon...

CS Energy Efficient Class C Series

- ★ 160lm/W, 90% energy saving
- ★ Available in 2.3", and 2.5" sizes
- ★ 3 cm installation height
- ★ IC insulation coverable
- ★ 3CCT & Dimmable
- ★ IP65
- ★ CRI>90Ra

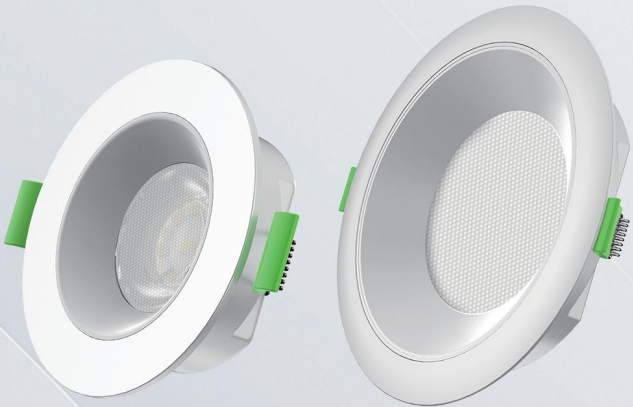

CS Anti-Glare Recessed Trim Series

Recessed trim design and anti-glare lens to help achieve UGR < 19 ★

Available in 2.3", 2.5", 3", 4", 6", and 8" sizes ★

Spray white, black, and satin nickel finish optional ★


3CCT & Dimmable ★

3 cm installation height ★

IC insulation coverable ★

IP65 ★

Energy Efficiency Class E ★

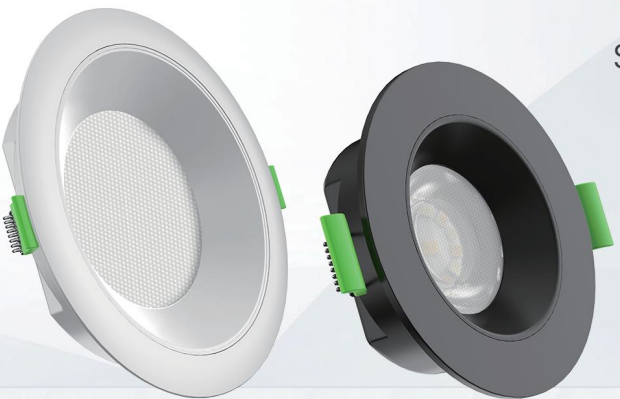

CS Surface-Mounted Series

- ★ Both round and square shapes available
- ★ Available in 4", 6", and 8" sizes
- ★ 3CCT & Dimmable
- ★ IP65
- ★ Energy Efficiency Class E





WALL LIGHT

Wall Light



UB01



UB05



JR20

Cabinet Light



UB02



UB02C



UB03



UB04



UB06

Solar Light



OT-01A



SR03



SAS113



OT-04



OT-05

Coming Soon...



SR260


GLOBAL

Code	UB01
Wattage	3W
CCT(K)	3000K/4000K/5000K/6000K+RGB
Lumen	200lm
Beam Angle	24°
Dimmable	Yes
Material	ABS
Battery	3.7V 4000mAh
USB Charging	Type-C
Endurance Time	4.5h




Anti-Glare Design

Eye protection




Stretch Sheet Available

Make beam angle bigger



Adjustable Head


Flexible lighting angle



UB01 series

White

Color Changeable LED Reading Light

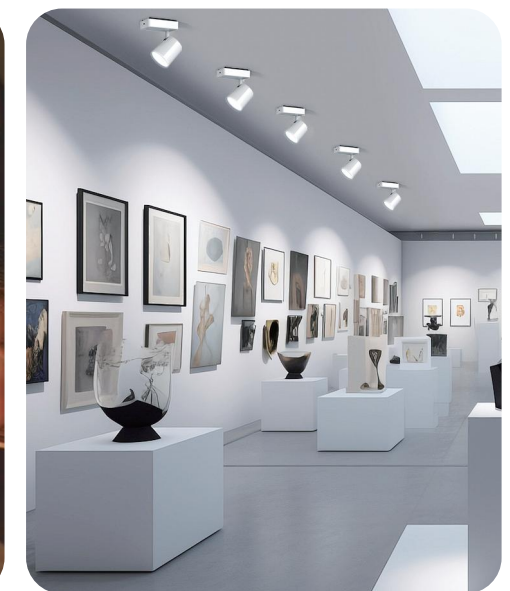




WALL LIGHT



WALL LIGHT

Code UB05 (Microwave)
Wattage 5W
CCT(K) 3000K/4000K/6000K
Lumen 320lm
Beam Angle 0°-70°
Dimmable Yes
Material ABS
Battery 3.7V 4000mAh
USB Charging Type-C
Endurance Time 4h
Detection Range 120°, 8m max (microwave)
20mm max (hand wave)




2 Working Modes

AUTO/HAND WAVE modes available



Beam Angle Adjustable

Customize the light beam you want



Installation Back Sheet

No pre-Installation required and easy to remove



UB05 series



3CCT Square Wall Light




Code JR20
Wattage 2W
CCT(K) 2700-6500K
Lumen 190lm
Beam Angle 60°
Dimmable Yes
Material ABS+AL
Battery 3.7V 4000mAh
USB Charging Type-C
Endurance Time 8h



Retractable & Rotatable

Adaptable to different painting sizes



2 Ways for Easy Installation

Magnetic install or rest atop artwork



Ultimate in Convenience


USB rechargeable & remote control



New JR series




Wireless LED Art Light

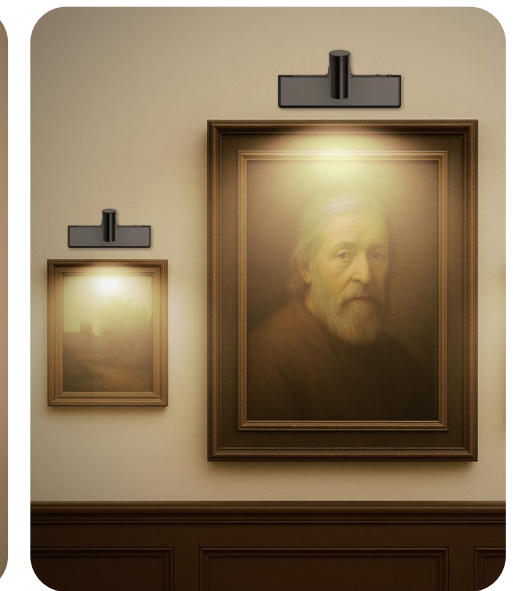



CABINET LIGHT

Code UB02-30
Wattage 1.5W
CCT(K) 3000K-6000K
Lumen 120lm
Beam Angle 120°
Dimmable Yes
Material ABS+PC
Length 30cm
Battery 3.7V 1500mAh
USB Charging Type-C
Endurance Time 6h
Detection Range 80°, <3m(PIR)
<10cm(handwave)



Motion/Wave Sensor

Wide applications in various space



Magnetic Adsorption

Easy to install and get recharged



4 Working Modes


DAY/NIGHT/HAND WAVE/ ON TIME modes available



UB02 series




Wireless Side-Emitting Under Cabinet Bar Light

UB02 series		 New
Code	UB02-30	UB02-40
Wattage	1.5W	3.5W
Lumen	120lm	220lm
Input	3.7V 1500mAh(Battery)	220-240VAC~50-60Hz
Duration Time	6h	/
Lenth(L)	300mm	400mm



CABINET LIGHT

Code UB02-C
Wattage 2.3W
CCT(K) 3000-6500K
Lumen 200lm
Dimmable Yes
Material ABS
Lenth 300mm
Battery 3.7V 1500mAh
USB Charging Type-C
Endurance Time 4h

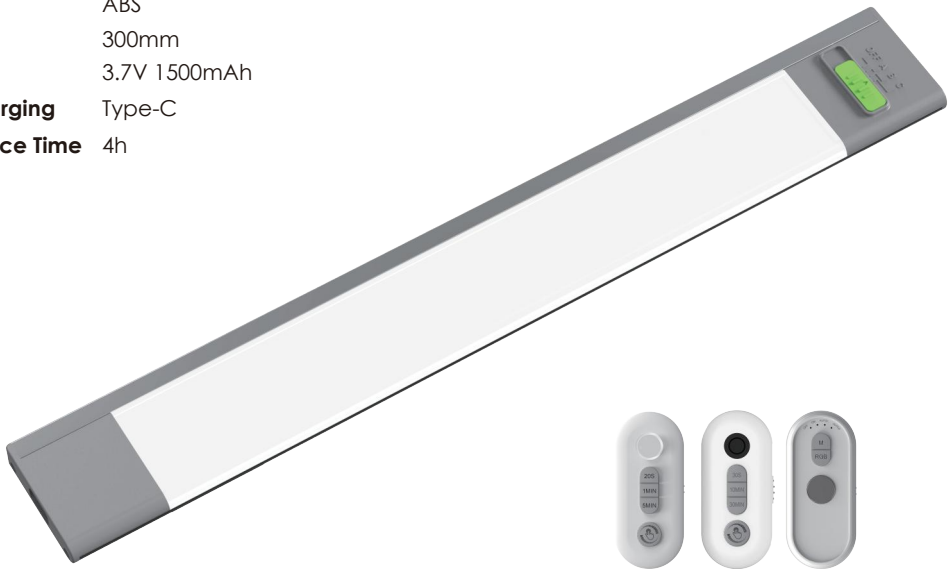

Wireless Connectable

Convenient group control via remote control



2 Trigger Modes

Motion/ Handwave sensor activated



Magnetic Adsorption

Easy to install and get recharged



New UB02C series



Wireless Connectable Under Cabinet Bar Light





CABINET LIGHT



CABINET LIGHT

Code UB06R
Wattage 2W
CCT(K) 3000K/4000K/6000K+RGB
Lumen 160-180lm
Beam Angle 45°/110°
Dimmable Yes
Material ABS
Diameter 85mm
Battery 3.7V 2000mAh
USB Charging Type-C
Endurance Time 6h



Wireless Connectable

Convenient group control via remote control



2 Beam Angles Available

Choose the one more suitable



2 Trigger Modes

Motion/ Handwave sensor activated



UB06 series

White

Wireless Connectable LED Cabinet Light






UB | Wireless Surface-Emitting Under Cabinet Bar Light

SPECIFICATIONS

Code	UB03-30	UB03-40	UB03-60
Wattage	1.5W	2W	3W
CCT(K)	3000-6500K		
Lumen	120lm	160lm	240lm
Dimmable	Yes		
Battery	3.7V 1500mAh	3.7V 2000mAh	3.7V 3000mAh
USB Charging	Type-C		
Charging Time	3 hours	4 hours	5 hours
Endurance Time	6 hours		
Working Mode	AUTO/OFF/ON TIME		
Detection Angle	120°		
Sensor Duration Time	30s		
Human Body Detection Distance	0-4m		
Length(L)	30cm	40cm	60cm
Material	ABS+PC		

White

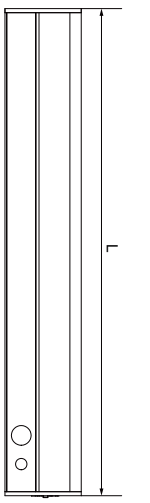


UB | Side-Emitting Connectable Under Cabinet Bar Light

SPECIFICATIONS

Code	UB04-30	UB04-40	UB04-60
Wattage	5W	6.5W	10W
CCT(K)	3000K-6500K		
Lumen	400lm	520lm	800lm
Dimmable	Yes		
Input	220-240V~50/60Hz		
Output	24V DC		
Working Mode	AUTO/NIGHT/HAND WAVE/ON TIME		
Detection Angle	120°		
Sensor Duration Time	30s/60s/120s		
Human Body Detection Distance	0-4m		
Hand Scan Detection Distance	<10cm		
Length(L)	30cm	40cm	60cm
Material	ABS+PC		

White

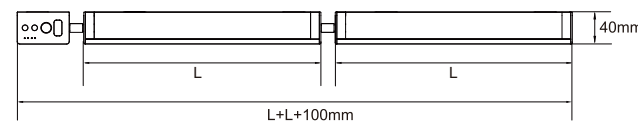



SOLAR LIGHT



SOLAR LIGHT

Code OT-01A-4P3
Wattage 4W
CCT(K) 3000K/4000/6500K
Lumen 180lm
Beam Angle 30°
Dimmable Yes
Material ABS+PC
Height 42.6cm
Solar Panel 5.5VDC
Battery 3.7V1800mAh
USB Charging Type-C
Endurance Time 2.5h
Detection Angle 120°



Adjustable Solar Panel
Efficient solar powered & save energy

Sensitive Motion Sensor
Sensitive Motion Sensor

Adjustable Head
Illuminate specific items you need

OT-01 series Black

30°/120° LED Solar Spike Light

OT series						
Code	OT-01A-1D3	OT-01A-1R	OT-01A-4P3	OT-01B-1D3	OT-01B-1R	OT-01B-4P3
Wattage	2W	1.2W	4W	1.2W	1.2W	4W
Lumen	100lm	60-80lm	180lm	60-80lm	60-80lm	180lm
Illumination	240Lux/1m	240Lux/1m	750Lux/1m	240Lux/1m	240Lux/1m	750Lux
Beam Angle	30°	30°	30°	120°	120°	120°
Detection Angle	/	/	120°	/	/	120°
Endurance Time	8-10h	8-10h	2.5h	8-10h	8-10h	2.5h



Code PL-SR03
Wattage 1.2W
CCT(K) 3000K/4000/6500K
Lumen 75lm
Dimmable Yes
Material ABS+PC
Solar Panel 5VDC
Battery 3.7V 1500mAh
USB Charging Type-C
Endurance Time 12h
Detection Range 240°,10m max



Wireless Connectable
Convenient group control

Separated Motion Sensor
Solar-charged sensor & more flexible sensing distances

4 Working Modes
DAY/NIGHT/D2D/ON TIME modes available

SR/SAS series Black

LED Solar Patio Light

SR/SAS series		
Code	PL-SR03	PL-SAS113
Wattage	1.2W	1.6W
Lumen	75lm	140lm
CCT(K)	3000K/4000K/6500K	3000K/4000K/6500K
Height	620mm	755mm
Detection Range	240°,10m max	240°,10m max
Endurance Time	12h	12h



OT | Colour Adjustable LED Solar Security Light

SPECIFICATIONS


Code	OT-04
Wattage	5W
CCT(K)	3000K-6500K
Lumen	400lm max
Dimmable	Yes
Beam Angle	100°
Solar Panel	5.5VDC
Battery	3.7V 1800mAh
Charging Time	8-10 hours by solar energy
USB Charging	3.5 hours by Type-C
Endurance Time	2 hours
Worknig Mode	AUTO/D2D/ON TIME
Detection Angle	120°
Sensor Duration Time	30s/60s/120s
Detection Distance	9m max
Material	ABS+PC



OT | Colour Adjustable LED Solar Security Light

SPECIFICATIONS

Code	OT-05
Wattage	5W
CCT(K)	3000K/4000K/6500K
Lumen	400lm
Dimmable	No
Beam Angle	100°
Solar Panel	5.5VDC
Battery	3.7V 1800mAh
Charging Time	8-10 hours by solar energy
USB Charging	3.5 hours by Type-C
Endurance Time	2 hours
Detection Brightness	5-2000Lux
Detection Angle	120°
Sensor Duration Time	3secs-8mins
Detection Distance	16m max
Material	ABS+PC

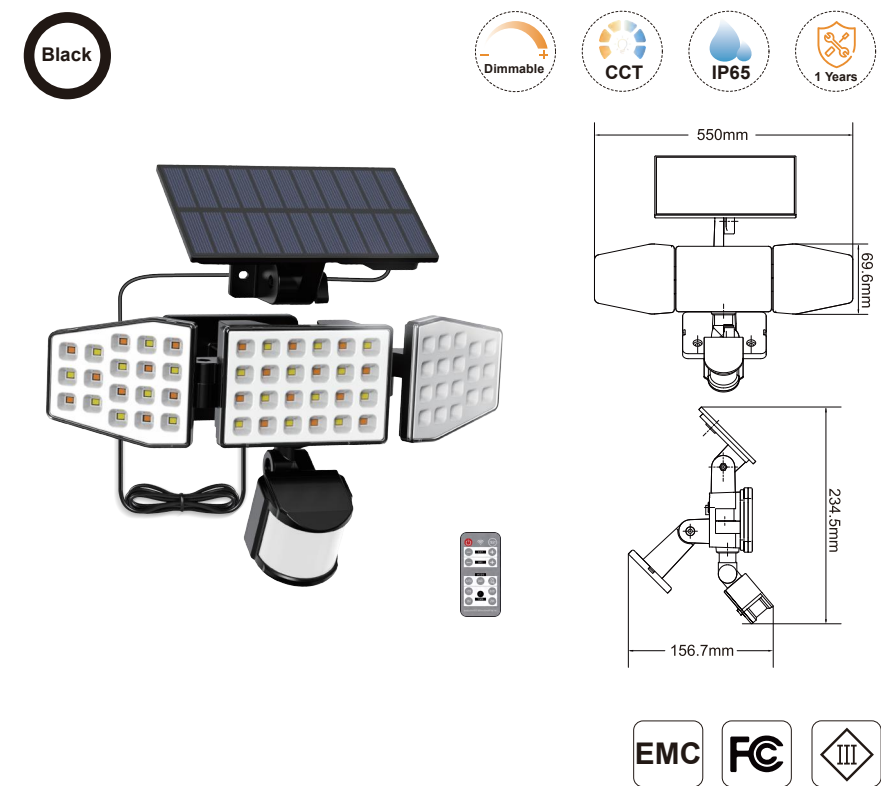

SR260 Wall Light

- ★ Bidirectional Lighting
- ★ Rotatable Head

