



2026 CATALOGUE



DOWNLIGHT
Slim Color Changeable
Dimmable LED Downlight



SECURITY LIGHT
Remote Control High Lumen
Output Security Light



CABINET LIGHT
Color Changeable LED
Reading Light



SMART DOWNLIGHT
Smart LED Downlight with
Interchangeable Bezes



SOLAR LIGHT
LED Solar Spike Light



SMART SECURITY
High Lumen Output Outdoor
Smart Security Light



Factory Add: No.255 Yindong South Rd., Yinzhou Economic Development Zone,
Zhanqi Town, Ningbo City, Zhejiang, China.

Email: manager@silanglighting.com

Website: www.silanglighting.com

Tel: (+86)-574-55003160 (+86)-18058563635



e-Catalogue

Europe & Australia

COMPANY PROFILE



20000 m²
Plant area

200+
Workers

30 +
Export country

\$40 million
Annual output

Ningbo SILANG Lighting is a professional LED lighting manufacturer focused on designing, producing, and developing high-quality LED products. With years of experience, we help upgrade indoor and outdoor lighting with reliable downlights, floodlights, smart lights, and solar lights.

Based in Ningbo—just 30 minutes from Ningbo Port—we offer fast delivery and a strong supply chain. Our products are easy to use, innovative, and trusted by customers across Europe, Australia, New Zealand, and the US.

We continuously invest in R&D and work closely with our clients to bring new ideas to life. No matter what your project involves, we're here to provide lighting solutions that support your goals.










CERTIFICATION



OUR STRENGTH


- 
Competitive Pricing & Quality Products: We design and produce professional LED lights in our own lab and factory, using self-developed drivers and advanced equipment. This allows us to offer high-quality lighting at reasonable prices with flexible order quantities.
- 
Rigorous Quality Control: With over 10 years in LED lighting, we follow ISO9001 standards and meet CE, ETL, and RCM certifications. Our strict QC process includes incoming checks, assembly inspections, and pre-shipment full inspections upon request.
- 
Stable & Fast Delivery: With 200+ skilled workers and 22 production lines, we output 600,000 pieces monthly. Being located just 30 minutes from Ningbo Port ensures smooth and efficient exports.
- 
Strong R&D & Customization: Our dedicated R&D team launches 6+ new products each year. We also provide deep customization based on feedback from European, Australian, and American markets.
- 
Global Production Bases: We operate factories in both China and Vietnam, which ensures stable supply and competitive cost advantages.

FACILITY

Downlight



Step Light



SV Series

Security Light



YD3R Series

YDR Series

YDS Series

FLB Series

Commercial Light



TPLC

Ceiling Light



SKA29


Comming Soon.....



CS Series


EU
AU

Code DL-CS20-104D3
Wattage 4W
CCT(K) 3000K/ 4000K/ 6500K
Lumen 400lm
Beam Angle 110°
Dimmable Yes(Triac)
Material Iron+PP+PS
Height 29mm



Metal Fitting

White powder coated finish For a long lifespan




IC Insulation Coverable

Save energy and enhance overall safety

Rubber Seal Ring

Reduce air infiltration and save energy



New

CS series



METAL 3CCT+DIM Downlight

CS Series					
Code	DL-CS20-104D3	DL-CS23-105D3	DL-CS25-106D3	DL-CS30-108D3	DL-CS40-110D3
Wattage	4W	5W	6W	8W	10W
Lumen	400lm	550lm	700lm	800lm	1250lm
Beam Angle	110°	110°	110°	110°	110°
Cutout	55-68mm	68-75mm	75-85mm	90-100mm	125-135mm
Height	29mm	28mm	28mm	28mm	28mm



Code DL-CQ23-107D3
Wattage 7W
CCT(K) 3000K/4000K/6500K
Lumen 770lm
Beam Angle 110°
Dimmable Yes(Triac)
Material Iron+PC
Height 33.7mm
Cutout 68-75mm



Metal Fitting
 Ensures durability and extended lifespan

White Powder Coated Finish Metal Fitting


3 Color Temperature
 Switch the Color temperature you need

Rubber Seal Ring
 Reduce air infiltration and save energy


CQ series



METAL 3CCT+DIM Downlight

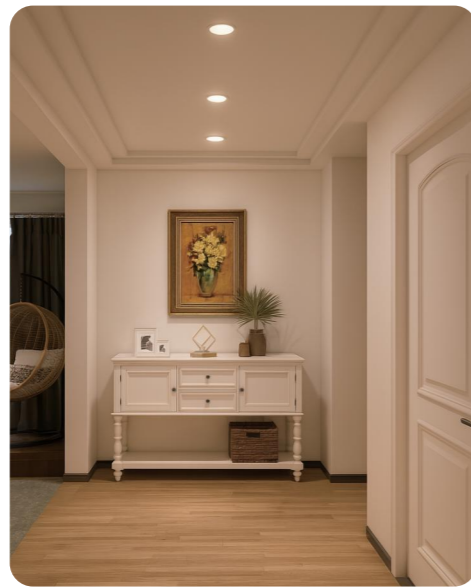

Code DL-SP25G-106D3
Wattage 6W
CCT(K) 3000K/4000K/6500K
Lumen 520lm
Beam Angle 38°/60°/110°
Dimmable Yes
Material PA+AL+PC
Height 25mm



25mm Ultra Slim Design
 Meet various space requirements

Multiple Beam Angle
 38°/60°/110° available

Separated LED Module
 Easy to replace

SP series



Slim Fixed/Tilted Led Downlight

SP Series					
Code	DL-SP25F/G-106D3	DL-SP25F/G-106D3	DL-SP25B-F/G-106D3	DL-SP25D-F/G-108	DL-SP225F/G-106D5
Wattage	6W	6W	6W	4W/6W/8W	5.5W
Lumen	520lm	520lm	495lm	850lm	480lm
Beam Angle	38°	60°	110°	110°	60°
Cutout	68-75/75-78mm	68-75/75-78mm	68-75/75-78mm	60-70/68-75mm	68-75/75-78mm



Code DL-SP25-106D3
Wattage 6W
CCT(K) 3000K/4000K/6500K
Lumen 520lm
Beam Angle 38°/60°/110°
Dimmable Yes
Material PA+AL+PC
Height 25mm




Ultra-Flat Design

Aesthetically pleasing & easy to install



Multiple Beam Angle

38°/60°/110° available



GU10/MR16 Replacement

Φ50mm, ideal replacements for traditional bulbs



SP series

White

3CCT Separated LED Module

Compatible with Multiple Frames



Code DL-SH230SAG-110D3
Wattage 10W
CCT(K) 3000K/4000K/5700K
Lumen 800lm
Beam Angle 60°
Dimmable Yes(Triac)
Material Nylon+AL+PC
Height 55mm



Anti-Glare Design

Eye protection




External Driver

Longer service life & more durable



Interchangeable Bezels

Wild applications



SH2 series

White Black Nickel Chrome

Anti-Glare 3CCT Selectable LED Downlight

SHII Series						
Code	SH225-108D3	SH230-110D3	DL-SH230AG-110D3	DL-SH230SAG-110D3	SH225-108D5	SH230-110D5
Wattage	8W	10W	10W	10W	8W	10W
Lumen	640lm	900lm	850lm	850lm	600lm	750lm
Beam Angle	110°		60°	60°	110°	
Cutout	70-80mm	90-100mm	90-100mm	90-100mm	70-80mm	90-100mm
Height	35mm		43mm	43mm	35mm	



Code DL-SH330SAG-110D3
Wattage 10W
CCT(K) 3000K/4000K/5700K
Lumen 850lm
Beam Angle 60°
Dimmable Yes(Triac)
Material Nylon+AL+PC
Height 71mm



Anti-Glare Design

Eye protection



Light Source Selectable

SMD/COB light source available



Interchangeable Bezels

Wide applications



SH3 series



Deep Recessed 3CCT Selectable LED Downlight

SHIII Series				
Code	DL-SH330(C)-110D3	DL-SH330AG-110D3	DL-SH330SAG-110D3	DL-SH330-110D5
Wattage	10W	10W	10W	10W
Lumen	950lm	950lm	950lm	750lm
Beam Angle	110°	110°	110°	110°
Cutout	90-100mm	90-100mm	90-100mm	90-100mm
Height	50mm	50mm	50mm	50mm



Code DL-SF30-110D3
Wattage 10W
CCT(K) 3000K/4000K/5700K
Lumen 800lm
Beam Angle 110°
Dimmable Yes(Triac)
Material PA+PC
Height 32.4mm




32mm Slim Design

Save ceiling space



Upgraded DOB Plan

Choice of cost-effective



Energy Efficiency

Saving energy without brightness compromise



SF series



Color Adjustable Dimmable Slim LED Downlight

SF Series						
Code	DL-SF25-108D3	DL-SF25C-106D3	DL-SF30-110D3	DL-SF30C-108D3	DL-SF40-112D3	DL-SF30SAG-108D3
Wattage	8W	6W	10W	8W	12W	7.5W
Lumen	850lm	530lm	1000lm	740lm	1250lm	850lm
Beam Angle	110°	110°	110°	110°	110°	60°
Cutout	75-80mm	75-80mm	90-100mm	90-100mm	120-130mm	90-100mm
Height	32mm	40mm	32.4mm	40mm	34mm	60mm



Code DL-SQ325R-108LND3
Wattage 4W/6W/8W
CCT(K) 3000K/4000K/6500K
Lumen 400/600/800lm
Beam Angle 110°
Dimmable Yes(Triac)
Material PP+AL+PC
Height 29mm



3WT



3 Wattage Tunable

Switch the brightness you need



Super Thin Design

Suitable for slim ceiling void



Round/Square Selectable

Round & square face available



SQ series



Slim Colour Changeable Dimmable LED Downlight

Code DL-SQ623-107D3
Wattage 7W
CCT(K) 3000K/ 4000K/ 6500K
Lumen 600lm
Beam Angle 110°
Dimmable Yes(Triac)
Material PP+AL+PC
Height 30mm



New

SQ6 series



Slim Colour Changeable Dimmable LED Downlight

IC Rated

Safe when fully covered by insulation

Plastic-Coated Aluminum Fitting

Efficient heat dissipation

Multi-Size Available

Find your perfect match



SQ Series					
Code	DL-SQ325R-108LND3	DL-SQ325A-108LND3	DL-SQ25R-107LND3	DL-SQ25S-107LND3	DL-SQ225-107D3W-3WT
Wattage	4W/6W/8W	4W/6W/8W	7W	7W	3W/5W/7W
Lumen	400/600/800lm	400/600/800lm	560lm	560lm	280/450/650lm
Beam Angle	110°	60°	110°	110°	120°
Cutout	68-78mm	68-78mm	66-75mm	66-75mm	66-75mm

SQ6 Series			
Code	DL-SQ623-107D3	DL-SQ625-108D3	DL-SQ630-110D3
Wattage	7W	8W	10W
Lumen	600lm	800lm	1000lm
Beam Angle	110°	110°	110°
Cutout	68-78mm	75-85mm	90-100mm
Height	30mm	30mm	30mm



Code DL-SQ525
Wattage 4W/6W/8W
CCT(K) 3000K/4000K/6500K
Lumen 400lm/600lm/800lm
Beam Angle 110°
Dimmable Yes(Triac)
Material PP+PC
Height 32.6mm





3 Wattage Tunable
 Switch the brightness you need



Ultra-Slim Design
 Suitable for narrow ceiling void





Nightlight Mode
 Soft glow for cozy nighttime ambiance

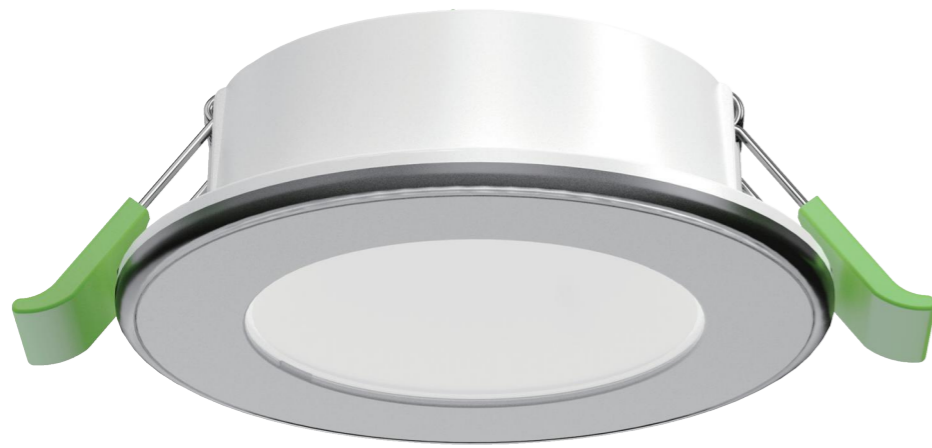

New
SQ525 series White

Ultra Slim 3WT LED Downlight With Nightlight

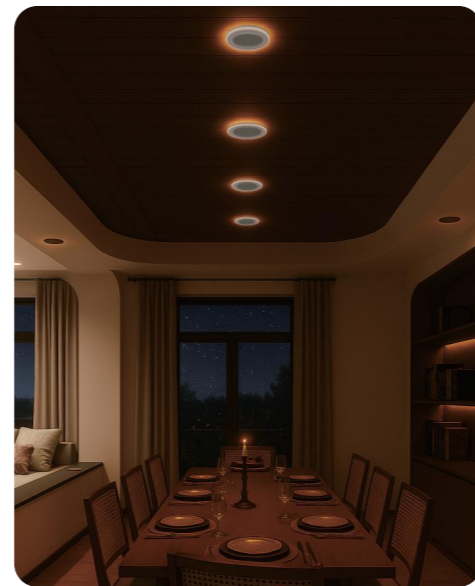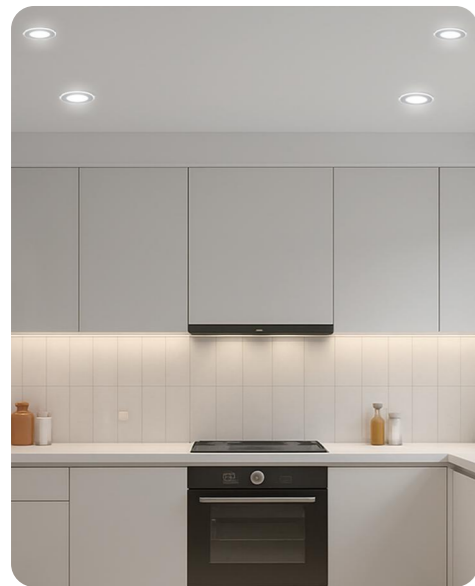

Code DL-SS20-104LND3
Wattage 4W
CCT(K) 3000K/4000K/6500K
Lumen 320lm
Beam Angle 110°
Dimmable Yes(Triac)
Material PP+PS
Height 30mm




Super Thin Design
 Suitable for Slim ceiling void



Multi-Size Selectable
 From 2" to 8", 7 sizes available



Upgraded DOB Plan
 Choice of cost-effective



SS series White Black Nickel

Ultra Slim Colour Changeable LED Downlight

SS Series								
Code	DL-SS20-104LND3	DL-SS20S-104LND3	DL-SS23-105LND3	SL-SS25-105LND3	DL-SS30-107LND3	DL-SS40-110LND3	DL-SS60-115LND3	DL-SS80-122LND3
Wattage	4W	4W	5W	5W	7W	10W	15W	22W
Lumen	320lm	310lm	400lm	400lm	600lm	850lm	1300lm	1900lm
Beam Angle	110°	110°	110°	110°	110°	110°	110°	110°
Cutout	55-68mm	55-68mm	68-78mm	75-85mm	90-100mm	125-135mm	145-165mm	185-210mm
Height	30mm	30mm	30mm	31mm	31mm	31mm	32mm	32mm



Code DL-SJ20-104L3
 Wattage 4W
 CCT(K) 3000K/4000K/6500K
 Lumen 340lm
 Beam Angle 100°
 Dimmable No
 Material PP+PS
 Height 31mm



Multi-Size Available
 Find your perfect match



Slim Design
 Suitable for narrow ceiling void



IP44 Waterproof
 Suitable for damp areas



New
SJ series White

Ultra Slim Colour Changeable LED Downlight


SJ Series					
Code	DL-SJ20-104L3	DL-SJ23-105L3	DL-SJ25-105L3	DL-SJ30-107L3	DL-SJ40-110L3
Wattage	4W	5W	5W	7W	10W
Lumen	340lm	450lm	450lm	630lm	900lm
Beam Angle	110°	110°	110°	110°	110°
Cutout	55-68mm	68-75mm	75-85mm	90-100mm	125-135mm
Height	31mm	31mm	31mm	31mm	31mm



SS | 3CCT Low Voltage Slim LED Downlight

SPECIFICATIONS


Code	DL-SS20N-504N3	DL-SS23N-505N3
Wattage	4W	5W
CCT(K)	3000K/4000K/6500K	
Lumen	400lm max	540lm max
Input	AC 12V, DC 12-24V	
Beam Angle	110°	
Dimmable	No	
Cutout	55-68mm	68-78mm
Dimension(DXH)	78X30mm	85X29mm
Material	PP+PS	



ST | 3CCT Low Voltage Ultra Slim LED Downlight

SPECIFICATIONS

Code	DL-ST20V-504N3
Wattage	3.5W
CCT(K)	3000K/4000K/6000K
Lumen	250lm
Input	AC 12V, DC 12-24V
Beam Angle	110°
Dimmable	No
Cutout	55-58mm
Height	18mm
Material	PC



SE | 6W 70mm Cutout IP54 Smart LED Downlight

SPECIFICATIONS

Code	DL-SE25-106D5	Beam Angle	110°
Wattage	6W	Dimmable	Yes
CCT(K)	3000K-6500K&RGB	Material	Nylon+Aluminum+PC
Lumen	570lm	Height	33mm



Cutout: 68-75mm



SI | Colour Changeable LED Downlight Four Dimensions Available

SPECIFICATIONS

Code	SI225	SI230	SI235	SI240	Beam Angle	110°
Wattage	8W	10W	12W	14W	Dimmable	Yes
CCT(K)	3000K/4000K/5700K				Material	Nylon+Aluminum+PC
Lumen	750lm	900lm	1100lm	1300lm	Height	50mm 57mm 60mm 65mm



8W Cutout: 70-80mm
10W Cutout: 90-100mm
12W Cutout: 105-120mm
14W Cutout: 120-130mm

SA | Colour Changeable IP44 Dimmable LED Downlight

SPECIFICATIONS

Code	DL-SA330-110D3	Beam Angle	110°
Wattage	10W	Dimmable	Yes
CCT(K)	3000K/4000K/5700K	Material	Nylon+Aluminum+PC
Lumen	900lm	Height	56mm



Cutout: 90-100mm



SI | PIR Motion Sensor Colour Changeable LED Downlight

SPECIFICATIONS

Code	DL-SI230-110P3	Detection Range	120°
Wattage	10W	Detection Distance	5m max
CCT(K)	3000K/4000K/5700K	Detection Duration	1hr max
Lumen	800lm	Working Ambience	<50Lux
Beam Angle	110°	Height	65mm



Cutout: 90-100mm

YF | Colour Switchable LED Downlight With Isolated Dimmable Driver

SPECIFICATIONS

Code	YB25-109D3	YF30-112D3	YB40-115D3	Beam Angle	110°
Wattage	9W	12W	15W	Dimmable	Yes
CCT(K)	3000K/4000K/5700K			Material	Aluminum+PC
Lumen	800lm	1100lm	1350lm	Height	40mm 40mm 45mm



9W Cutout: 70-75mm
12W Cutout: 90-100mm
15W Cutout: 120-130mm



SI | Colour Changeable LED light With Recessed Trim

SPECIFICATIONS

Code	DL-SI230R-110D3	Beam Angle	110°
Wattage	10W	Dimmable	Yes
CCT(K)	3000K/4000K/5700K	Material	Nylon+Aluminum+PC
Lumen	800lm	Height	65mm




Cutout: 90-100mm

Code DL-SV25R/S-102D3
Wattage 0.5W/1.5W/2.5W
CCT(K) 3000K/4000K/6500K
Lumen 180-220lm
Beam Angle 110°
Material PP+PC+SS
Height 66mm



3 Wattage Tunable

Switch the brightness you need




Shrapnel Buckle

Quick installation with one press




Wide Application

Light up any space wherever you need it

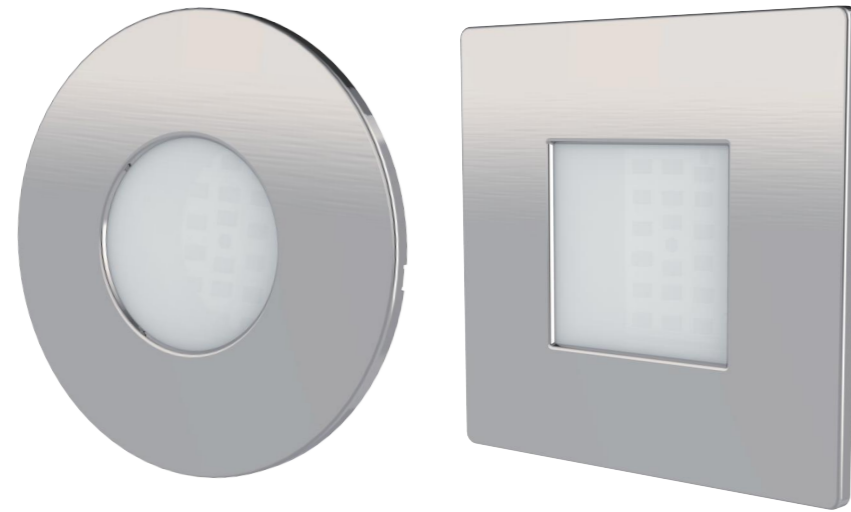

New
SV series White Black Nickel

Round/Square 3WT LED Step Light

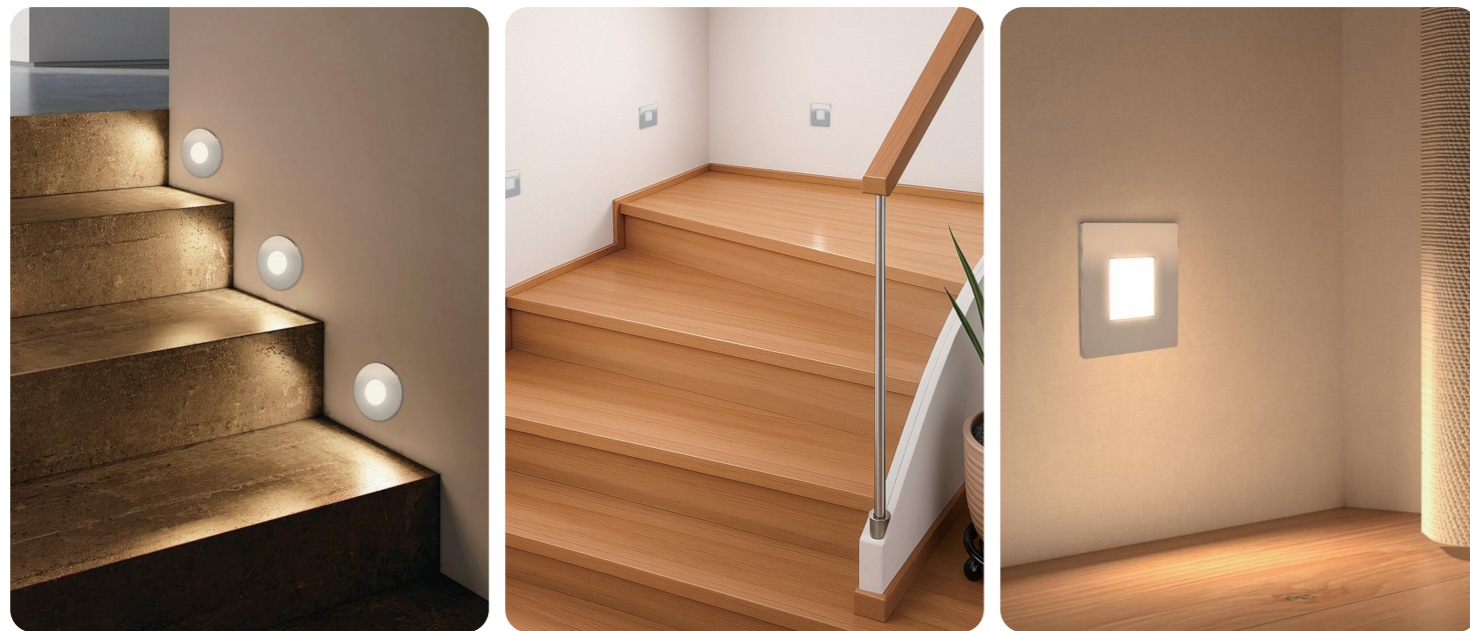


Code WL-YD3R-130P
Wattage 30W
CCT(K) 3000K/4000K/6500K
Lumen 2400lm
Beam Angle 90°/head
Detection Angle 120°
Detection Distance 10m max
Material PC+AL



Sensitive Motion Sensor

120° sensing angle, 10m max sensing range



Multiple Working Modes

AUTO/ON TIME modes available



Adjustable Heads

Wide illuminating area



YD3R series White Black

Single/Double Headed 3CCT LED Security Light

YD3R series				
Code	WL-YD3R-130P	WL-YD3R-130	WL-YD3R-115P	WL-YD3R-115
Wattage	30W	30W	15W	15W
Lumen	2400lm	2400lm	1200lm	1200lm
Working Mode	Auto/On Time	On Time	Auto/On Time	On Time
Detection Range	120°/10m max	/	120°/10m max	/



Code WL-YD2R-130P(BK)
Wattage 34W
CCT(K) 3000K/4000K/6500K
Lumen 3200lm
Beam Angle 90°/head
Detection Angle 150°
Detection Distance 12m max
Material PC




Sensitive Motion Sensor
 120°-150°, 10-12m sensing range



Multiple Working Modes
 AUTO/D2D/ON TIME modes available



Optional Control Methods
 Remote/App control available



YDR(S) series



Colour Changing LED Security Light

YDR(S) Series							
Code	WL-YD2R-130P	WL-YDR-130P-D4	WL-YDR-130P-D5	WL-YD2S-130P	WL-YDS-130P-D4	WL-YDS-130P-D5	WL-YD2S-140P
Wattage	30W	30W	30W	30W	30W	30W	40W
Lumen	3200lm	3200lm	3200lm	2850lm	2400lm	3200lm	3700lm
Working Mode	Auto On Time	Auto D2D On Time	Auto On Time	Auto On Time	Auto D2D On Time	Auto On Time	Auto D2D On Time



YC2R | Colour Changing LED Security Light

SPECIFICATIONS

Code YC2R-030P
Wattage 30W
CCT(K) 3000K/4000K/5700K
Lumen 2700lm
Beam Angle 90°/head
Detection Angle 160°
Detection Brightness 5-2000Lux
Duration Time 7secs-10mins
Detection Distance 12m max
Manual Override Yes
Material Die-cast AL+PC+Glass



YB2R | PIR Motion Sensor LED Security Light

SPECIFICATIONS

Code YB2R-020P
Wattage 20W
CCT(K) 3000K/4000K/6000K Optional
Lumen 1600lm
Beam Angle 90°/head
Detection Angle 160°
Detection Brightness 5-2000Lux
Duration Time 7secs-10mins
Detection Distance 12m max
Manual Override Yes
Material Die-cast AL+PC+Glass



YA2R | PIR Motion Sensor LED Security Light

SPECIFICATIONS

Code YA2R-030P
Wattage 30W
CCT(K) 3000K/4000K/6000K Optional
Lumen 2700lm
Beam Angle 90°/head
Detection Angle 160°
Detection Brightness 5-2000Lux
Duration Time 7secs-10mins
Detection Distance 12m max
Manual Override Yes
Material Die-cast AL+PC+Glass



FLB | IP65 LED Flood Light with PIR Sensor

SPECIFICATIONS

Code FLB-115P3 FLB-130P3 FLB-150P3
Wattage 15W 30W 50W
CCT(K) 3000K-6500K
Lumen 1200lm 2400lm 4000lm
Beam Angle 100°
Detection Angle 120°
Detection Brightness 5-2000Lux
Duration Time 3secs-8mins
Detection Distance 10m max
Material Nylon/AL+Glass



FLB | IP65 Remote Control LED Flood Light

SPECIFICATIONS

Code FLB-115D4 FLB-130D4 FLB-150D4
Wattage 15W 30W 50W
CCT(K) 3000K-6500K
Lumen 1200lm 2400lm 4000lm
Beam Angle 100°
Detection Angle 120°
Detection Brightness 5-2000Lux
Duration Time 3secs-8mins
Detection Distance 10m max
Material Nylon/AL+Glass



FLB | Smart LED Flood Light

SPECIFICATIONS

Code FLB-115D5 FLB-130D5 FLB-150D5
Wattage 15W 30W 50W
CCT(K) 3000K-6500K&RGB
Lumen 1200lm 2400lm 4000lm
Beam Angle 100°
Dimmable Yes
Material Nylon/AL+Glass




Code TPLC-148N3-3WT
 Wattage 24W/36W/48W
 CCT(K) 3000K/4000K/6500K
 Lumen 2640lm/3960lm/5280lm
 Beam Angle 120°
 Length 1.2m
 Material PC




3 Wattage Tunable

Switch the brightness you need




Interconnectable

Connect the lights for suitable length



Quick Connection Design

Easy to install and connect



TPLC series

White

LED Tri-Proof Light

TPLC Series					
Code	TPLC-124N3-3WT	TPLC-136N3-3WT	TPLC-148N3-3WT	TPLC-148N3-3WT (microwave)	TPLC-160N3-3WT
Wattage	12W/18W/24W	18W/28W/36W	24W/36W/48W	48W	30W/48W/60W
Lumen	1320/1980/2640lm	1980/3080/3960lm	2640/3960/5280lm	5280lm	3300/5280/6600lm
Length	0.6m	0.9m	1.2m	1.2m	1.5m




Code CL-SKA29D
 Wattage 12W/18W/24W
 CCT(K) 3000K/4000K/6500K
 Lumen 2300lm/2600lm/2900lm
 Beam Angle 120°
 Material Iron+PP+ABS
 Height 42mm



Multiple Trims Available

Flexible trim options for any setting



Back Light Effect

Front main light & rear night light



Optional Control Methods

Remote/App control available



SKA series

White

Black

3WT+3CCT Ceiling Light

SKA Series				
Code	CL-SKA23	CL-SKA33	CL-SKA29	CL-SKA29D
Wattage	9W/13W/18W	15W/22W/30W	12W/18W/24W	12W/18W/24W
CCT	3000K/4000K/6500K			
Lumen	1800lm/2000lm/2200lm	3000lm/3300lm/3600lm	2300lm/2600lm/2900lm	2300lm/2600lm/2900lm
Height	42mm	42mm	42mm	42mm



Coming Soon...

CS Square Shape Series

Available in 2.0", 2.3", 2.5", 3", 4", 6", and 8" sizes ★

Spray-coated white, black and satin nickel finish optional ★

3 cm installation height ★

IC insulation coverable ★

3CCT & Dimmable ★

Energy Efficiency Class E ★



Coming Soon...

CS Anti-Glare Recessed Trim Series

Recessed trim design and anti-glare lens to help achieve UGR < 19 ★

Available in 2.3", 2.5", 3", 4", 6", and 8" sizes ★

Spray white, black, and satin nickel finish optional ★


3CCT & Dimmable ★

3 cm installation height ★

IC insulation coverable ★

IP65 ★

Energy Efficiency Class E ★

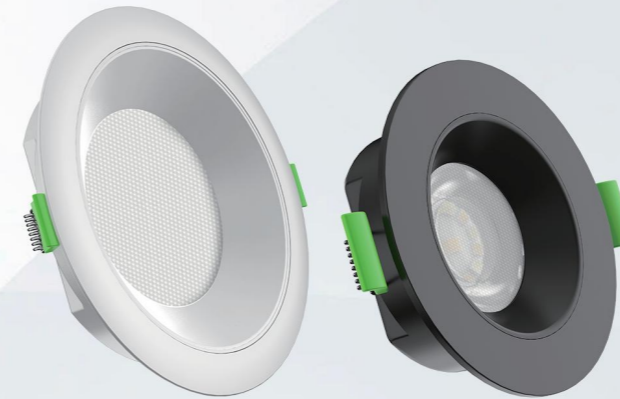

CS Energy Efficient Class C Series

★ 160lm/W, 90% energy saving

★ Available in 2.3", and 2.5" sizes

★ 3 cm installation height

★ IC insulation coverable

★ 3CCT & Dimmable

★ IP65

★ CRI>90Ra



CS Surface-Mounted Series

★ Both round and square shapes available

★ Available in 4", 6", and 8" sizes

★ 3CCT & Dimmable

★ IP65

★ Energy Efficiency Class E



Wall Light



Cabinet Light



Solar Light



Coming Soon...



Code UB01
 Wattage 3W
 CCT(K) 3000K/4000K/5000K/6000K+RGB
 Lumen 200lm
 Beam Angle 24°
 Dimmable Yes
 Material ABS
 Battery 3.7V 4000mAh
 USB Charging Type-C
 Endurance Time 4.5h




Anti-Glare Design

Eye protection




Stretch Sheet Available

Make beam angle bigger

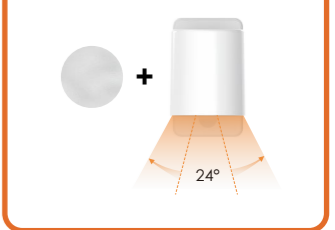



Adjustable Head

Flexible lighting angle

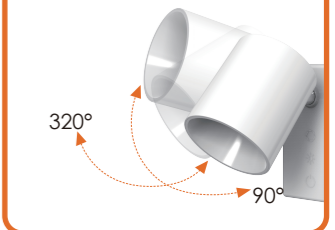

UB01 series White

Color Changeable LED Reading Light

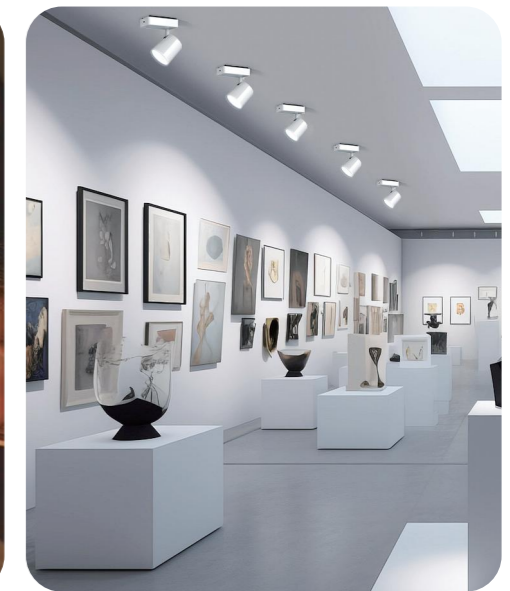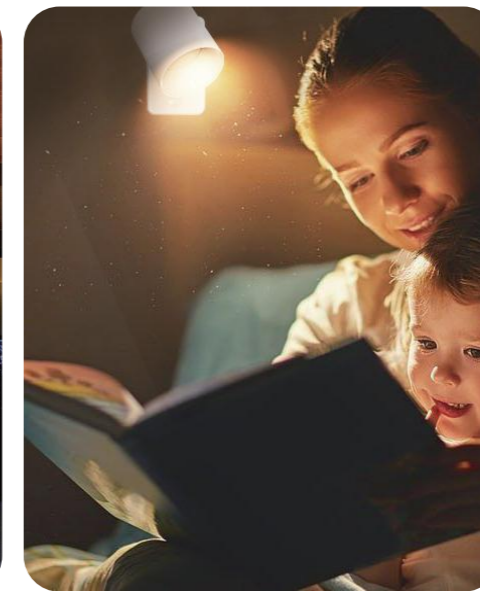



WALL LIGHT



WALL LIGHT

Code UB05 (Microwave)
 Wattage 5W
 CCT(K) 3000K/4000K/6000K
 Lumen 320lm
 Beam Angle 0°-70°
 Dimmable Yes
 Material ABS
 Battery 3.7V 4000mAh
 USB Charging Type-C
 Endurance Time 4h
 Detection Range 120°, 8m max (microwave)
 20mm max (hand wave)




2 Working Modes

AUTO/HAND WAVE modes available



Beam Angle Adjustable

Customize the light beam you want



Installation Back Sheet


No pre-Installation required and easy to remove



UB05 series



3CCT Square Wall Light

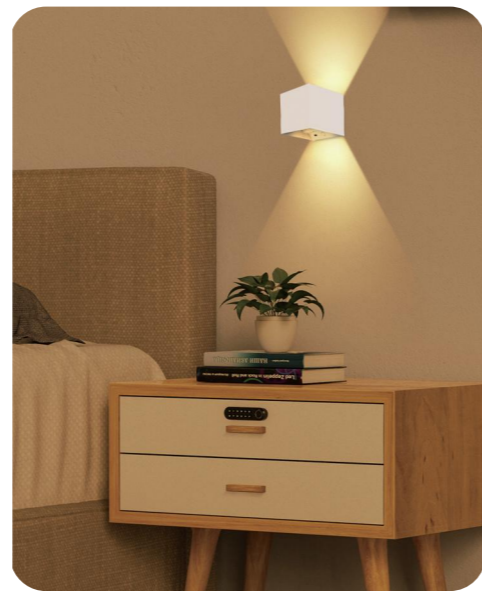


Code JR20
 Wattage 2W
 CCT(K) 2700-6500K
 Lumen 190lm
 Beam Angle 60°
 Dimmable Yes
 Material ABS+AL
 Battery 3.7V 4000mAh
 USB Charging Type-C
 Endurance Time 8h



Retractable & Rotatable

Adaptable to different painting sizes

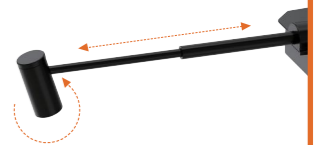

2 Ways for Easy Installation

Magnetic install or rest atop artwork



Ultimate in Convenience


USB rechargeable & remote control



New JR series



Wireless LED Art Light

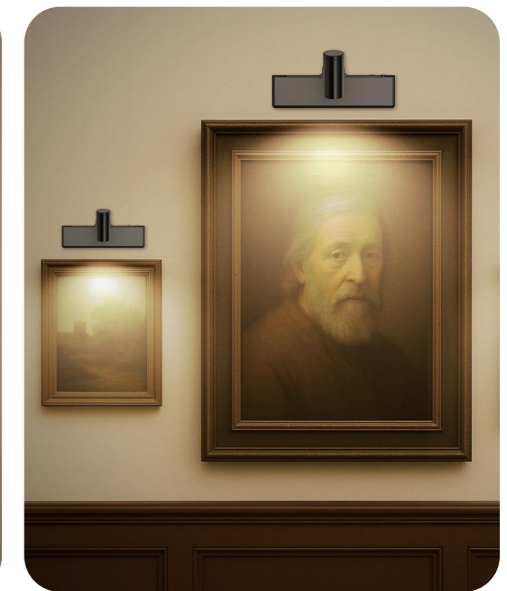

Code UB02-30
Wattage 1.5W
CCT(K) 3000K-6000K
Lumen 120lm
Beam Angle 120°
Dimmable Yes
Material ABS+PC
Length 30cm
Battery 3.7V 1500mAh
USB Charging Type-C
Endurance Time 6h
Detection Range 80°, <3m(PIR)
 <10cm(handwave)



Motion/Wave Sensor

Wide applications in various space



Magnetic Adsorption

Easy to install and get recharged



4 Working Modes

DAY/NIGHT/HAND WAVE/ ON TIME modes available



UB02 series




Wireless Side-Emitting Under Cabinet Bar Light

UB02 series		New
Code	UB02-30	UB02-40
Wattage	1.5W	3.5W
Lumen	120lm	220lm
Input	3.7V 1500mAh(Battery)	220-240VAC~50-60Hz
Duration Time	6h	/
Lenth(L)	300mm	400mm



Code UB02-C
Wattage 2.3W
CCT(K) 3000-6500K
Lumen 200lm
Dimmable Yes
Material ABS
Lenth 300mm
Battery 3.7V 1500mAh
USB Charging Type-C
Endurance Time 4h

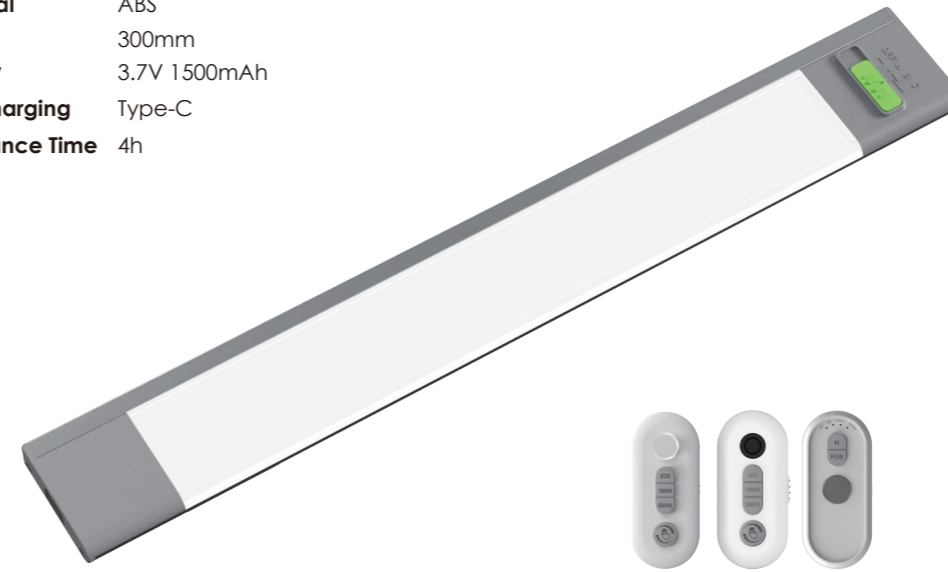

Wireless Connectable

Convenient group control via remote control



2 Trigger Modes

Motion/ Handwave sensor activated



Magnetic Adsorption

Easy to install and get recharged



New UB02C series



Wireless Connectable Under Cabinet Bar Light




Code UB06R
 Wattage 2W
 CCT(K) 3000K/4000K/6000K+RGB
 Lumen 160-180lm
 Beam Angle 45°/110°
 Dimmable Yes
 Material ABS
 Diameter 85mm
 Battery 3.7V 2000mAh
 USB Charging Type-C
 Endurance Time 6h



Wireless Connectable

Convenient group control via remote control

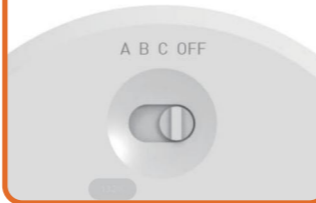

2 Beam Angles Available

Choose the one more suitable



2 Trigger Modes


Motion/ Handwave sensor activated



UB06 series

White

Wireless Connectable LED Cabinet Light


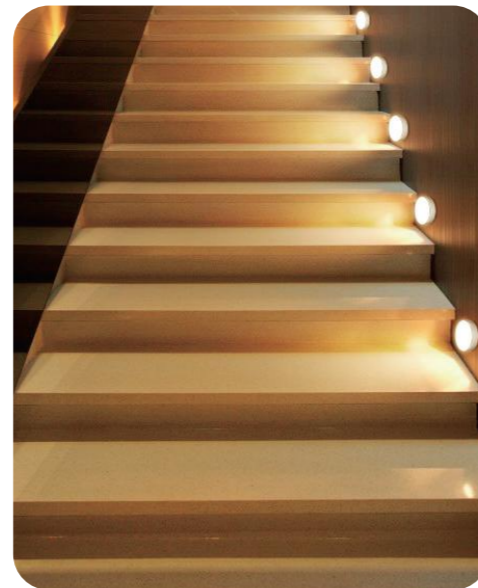


UB | Wireless Surface-Emitting Under Cabinet Bar Light

SPECIFICATIONS

Code	UB03-30	UB03-40	UB03-60
Wattage	1.5W	2W	3W
CCT(K)	3000-6500K		
Lumen	120lm	160lm	240lm
Dimmable	Yes		
Battery	3.7V 1500mAh	3.7V 2000mAh	3.7V 3000mAh
USB Charging	Type-C		
Charging Time	3 hours	4 hours	5 hours
Endurance Time	6 hours		
Working Mode	AUTO/OFF/ON TIME		
Detection Angle	120°		
Sensor Duration Time	30s		
Human Body Detection Distance	0-4m		
Length(L)	30cm	40cm	60cm
Material	ABS+PC		

White




UB | Side-Emitting Connectable Under Cabinet Bar Light


SPECIFICATIONS

Code	UB04-30	UB04-40	UB04-60
Wattage	5W	6.5W	10W
CCT(K)	3000K-6500K		
Lumen	400lm	520lm	800lm
Dimmable	Yes		
Input	220-240V~50/60Hz		
Output	24V DC		
Working Mode	AUTO/NIGHT/HAND WAVE/ON TIME		
Detection Angle	120°		
Sensor Duration Time	30s/60s/120s		
Human Body Detection Distance	0-4m		
Hand Scan Detection Distance	<10cm		
Length(L)	30cm	40cm	60cm
Material	ABS+PC		

White

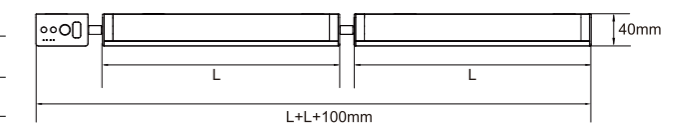

Code OT-01A-4P3
Wattage 4W
CCT(K) 3000K/4000/6500K
Lumen 180lm
Beam Angle 30°
Dimmable Yes
Material ABS+PC
Height 42.6cm
Solar Panel 5.5VDC
Battery 3.7V1800mAh
USB Charging Type-C
Endurance Time 2.5h
Detection Angle 120°



Adjustable Solar Panel

Efficient solar powered & save energy



Sensitive Motion Sensor

Sensitive Motion Sensor



Adjustable Head

Illuminate specific items you need



OT-01 series



30°/120° LED Solar Spike Light

OT series						
Code	OT-01A-1D3	OT-01A-1R	OT-01A-4P3	OT-01B-1D3	OT-01B-1R	OT-01B-4P3
Wattage	2W	1.2W	4W	1.2W	1.2W	4W
Lumen	100lm	60-80lm	180lm	60-80lm	60-80lm	180lm
Illumination	240Lux/1m	240Lux/1m	750Lux/1m	240Lux/1m	240Lux/1m	750Lux
Beam Angle	30°	30°	30°	120°	120°	120°
Detection Angle	/	/	120°	/	/	120°
Endurance Time	8-10h	8-10h	2.5h	8-10h	8-10h	2.5h



Code PL-SR03
Wattage 1.2W
CCT(K) 3000K/4000/6500K
Lumen 75lm
Dimmable Yes
Material ABS+PC
Solar Panel 5VDC
Battery 3.7V 1500mAh
USB Charging Type-C
Endurance Time 12h
Detection Range 240°,10m max



Wireless Connectable

Convenient group control



Separated Motion Sensor

Solar-charged sensor & more flexible sensing distances



4 Working Modes

DAY/NIGHT/D2D/ON TIME modes available



SR/SAS series



LED Solar Patio Light

SR/SAS series		
Code	PL-SR03	PL-SAS113
Wattage	1.2W	1.6W
Lumen	75lm	140lm
CCT(K)	3000K/4000K/6500K	3000K/4000K/6500K
Height	620mm	755mm
Detection Range	240°,10m max	240°,10m max
Endurance Time	12h	12h



OT | Colour Adjustable LED Solar Security Light

SPECIFICATIONS


Code	OT-04
Wattage	5W
CCT(K)	3000K-6500K
Lumen	400lm max
Dimmable	Yes
Beam Angle	100°
Solar Panel	5.5VDC
Battery	3.7V 1800mAh
Charging Time	8-10 hours by solar energy
USB Charging	3.5 hours by Type-C
Endurance Time	2 hours
Worknig Mode	AUTO/D2D/ON TIME
Detection Angle	120°
Sensor Duration Time	30s/60s/120s
Detection Distance	9m max
Material	ABS+PC



OT | Colour Adjustable LED Solar Security Light

SPECIFICATIONS

Code	OT-05
Wattage	5W
CCT(K)	3000K/4000K/6500K
Lumen	400lm
Dimmable	No
Beam Angle	100°
Solar Panel	5.5VDC
Battery	3.7V 1800mAh
Charging Time	8-10 hours by solar energy
USB Charging	3.5 hours by Type-C
Endurance Time	2 hours
Detection Brightness	5-2000Lux
Detection Angle	120°
Sensor Duration Time	3secs-8mins
Detection Distance	16m max
Material	ABS+PC

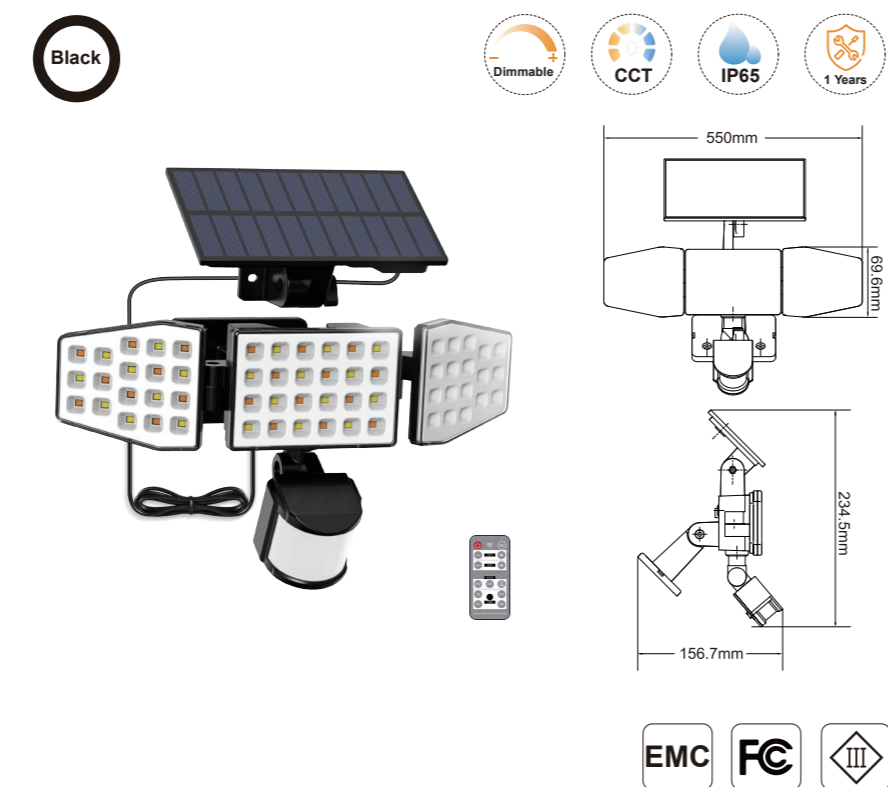

SR260 Wall Light

- ★ Bidirectional Lighting
- ★ Rotatable Head

